

# Abri™ 6032 Whirlpool And Soaking Bathtubs


Letter	Description	Whirlpool	Soaking
-	Drain Location	Left Hand / Right Hand	Left Hand / Right Hand
-	Whirlpool Pump Location	Opposite end of drain location	N/A
-	Cutout	58.00" x 30.25" (1473 mm x 768 mm)	58.00" x 30.25" (1473 mm x 768 mm)
-	Total Weight	855 lb (388 kg)	821 lb (372 kg)
-	Floor Loading	64 lb/ft <sup>2</sup> (312 kg/m <sup>2</sup> )	62 lb/ft <sup>2</sup> (303 kg/m <sup>2</sup> )
-	Operating Gallons (Min/Max)	40 Gal (151L) / 62 Gal (235L)	40 Gal (151L) / 62 Gal (235L)
-	Product Weight	89 lb (40 kg)	55 lb (25 kg)
L	Outer Length	60.00" (1524 mm)	60.00" (1524 mm)
W	Outer Width	32.00" (813 mm)	32.00" (813 mm)
H	Overall Height	21.25" (540 mm)	21.25" (540 mm)
A	Overflow Height	17.50" (445 mm)	17.50" (445 mm)
B	Long Edge to Drain Center	9.00" (229 mm)	9.00" (229 mm)
C	Short Edge to Drain Center	16.00" (406 mm)	16.00" (406 mm)
D	Drain Shoe Length	7.00" (179 mm)	7.00" (179 mm)
E	Deck Height	2.00" (51mm)	2.00" (51mm)
F	Deck Width	1.00" (25 mm)	1.00" (25 mm)
G	Service Access	12.00 x 18.00" (305 x 457 mm)	N/A
I	Floor Cutout for Drain	12.00 x 4.00" (305 x 102 mm)	12.00 x 4.00" (305 x 102 mm)
J	Interior Dimensions: J(W) x J(L)	18.00 x 42.00" (457 x 1067 mm)	18.00 x 42.00" (457 x 1067 mm)

## NOTE

The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).

### Electrical Specifications


(Each component requires a separate, dedicated GFCI protected circuit)  
 Motor/Pump 120V 15A 60HZ  
 Heater (optional) 120V 15A 60HZ

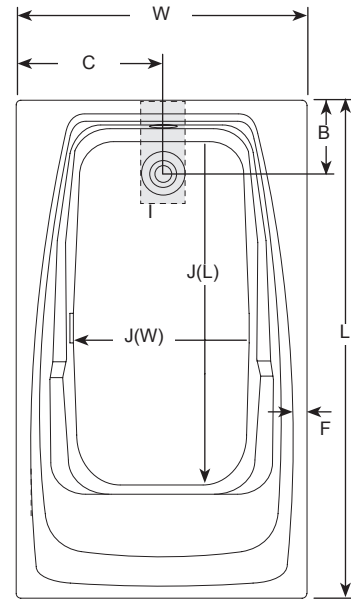


Soaking Bathtub

## Key Dimensions


(Left End Drain / Right Side Whirlpool Pump shown)

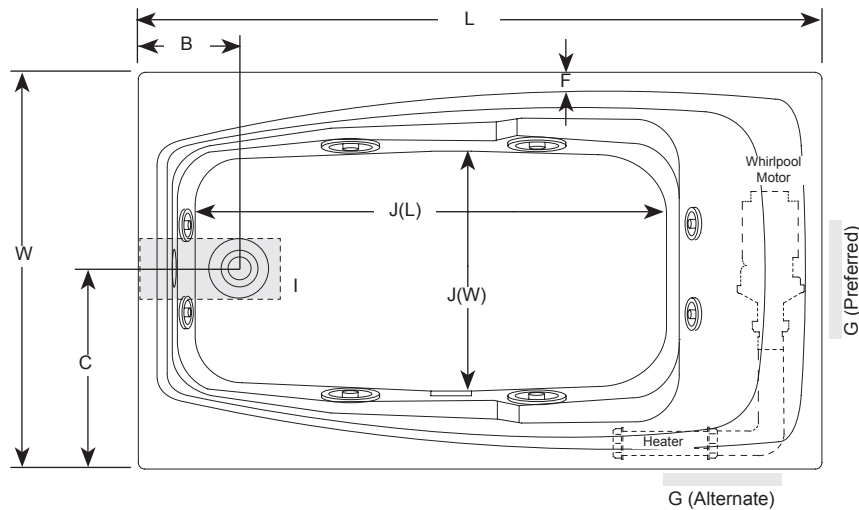


\*Deck width reflects only area indicated on detail.

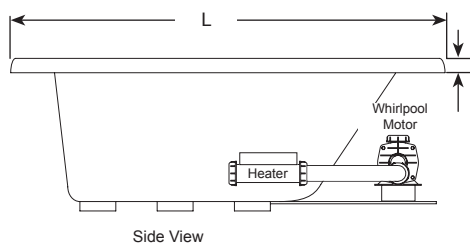

Side View



End View

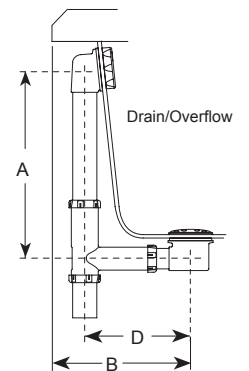

NOTE: Drawings not to scale.