


Abri™ 6032 Whirlpool And Soaking Skirted Bathtubs

Letter	Description	Whirlpool	Soaking
-	Drain Location	Left Hand / Right Hand	Left Hand / Right Hand
-	Whirlpool Pump Location	Opposite end of drain location	N/A
-	Cutout	N/A	N/A
-	Total Weight	823 lb (373 kg)	779 lb (353 kg)
-	Floor Loading	62 lb/ft ² (303 kg/m ²)	58 lb/ft ² (283 kg/m ²)
-	Operating Gallons (Min/Max)	37 Gal (140L) / 55 Gal (208L)	37 Gal (140L) / 55 Gal (208L)
-	Product Weight	115 lb (52 kg)	71 lb (32 kg)
L	Outer Length	60.00" (1524 mm)	60.00" (1524 mm)
W	Outer Width	32.00" (813 mm)	32.00" (813 mm)
H	Overall Height	20.50" (521 mm)	20.50" (521 mm)
A	Overflow Height	17.50" (446 mm)	17.50" (446 mm)
B	Long Edge to Drain Center	9.38" (238 mm)	9.38" (238 mm)
C	Short Edge to Drain Center	16.00" (406 mm)	16.00" (406 mm)
D	Drain Shoe Length	7.00" (179 mm)	7.00" (179 mm)
E	Flange Height	1.00" (25mm)	1.00" (25mm)
F	Deck Width	1.50" (38 mm)	1.50" (38 mm)
G	Service Access	12.00 x 18.00" (305 x 457 mm)	N/A
I	Floor Cutout for Drain	12.00 x 4.00" (305 x 102 mm)	12.00 x 4.00" (305 x 102 mm)
J	Interior Dimensions: J(W) x J(L)	22.00 x 50.00" (559 x 1270 mm)	22.00 x 50.00" (559 x 1270 mm)

NOTE


The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).
 Electrical Specifications
 (Each component requires a separate, dedicated GFCI protected circuit)
 Motor/Pump 120V 15A 60HZ
 Heater (optional) 120V 15A 60HZ

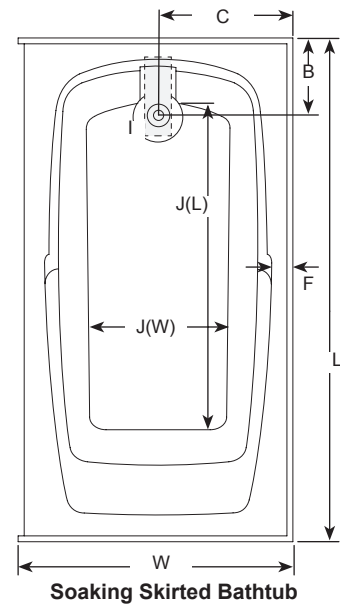




Key Dimensions

(Left End Drain / Right Side Whirlpool Pump)

(Right End Drain / Left Side Whirlpool Pump)

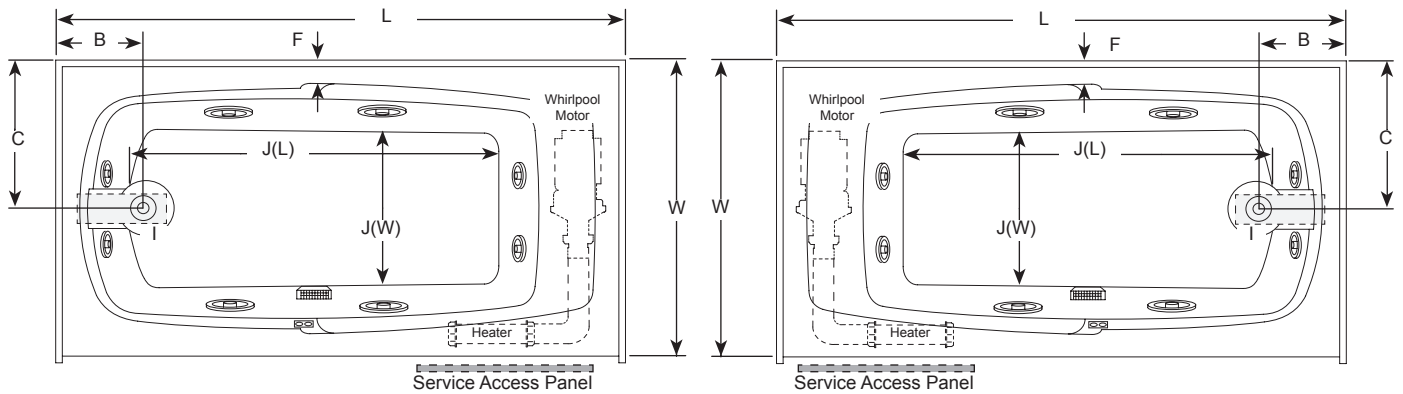

*Deck width reflects only area indicated on detail.

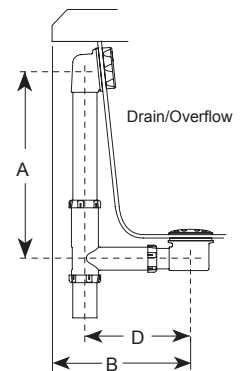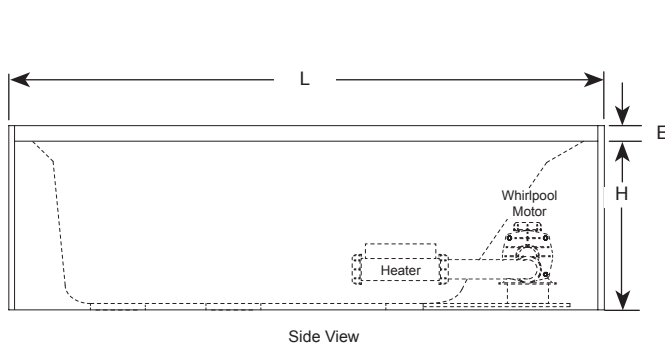

NOTE: Drawings not to scale.