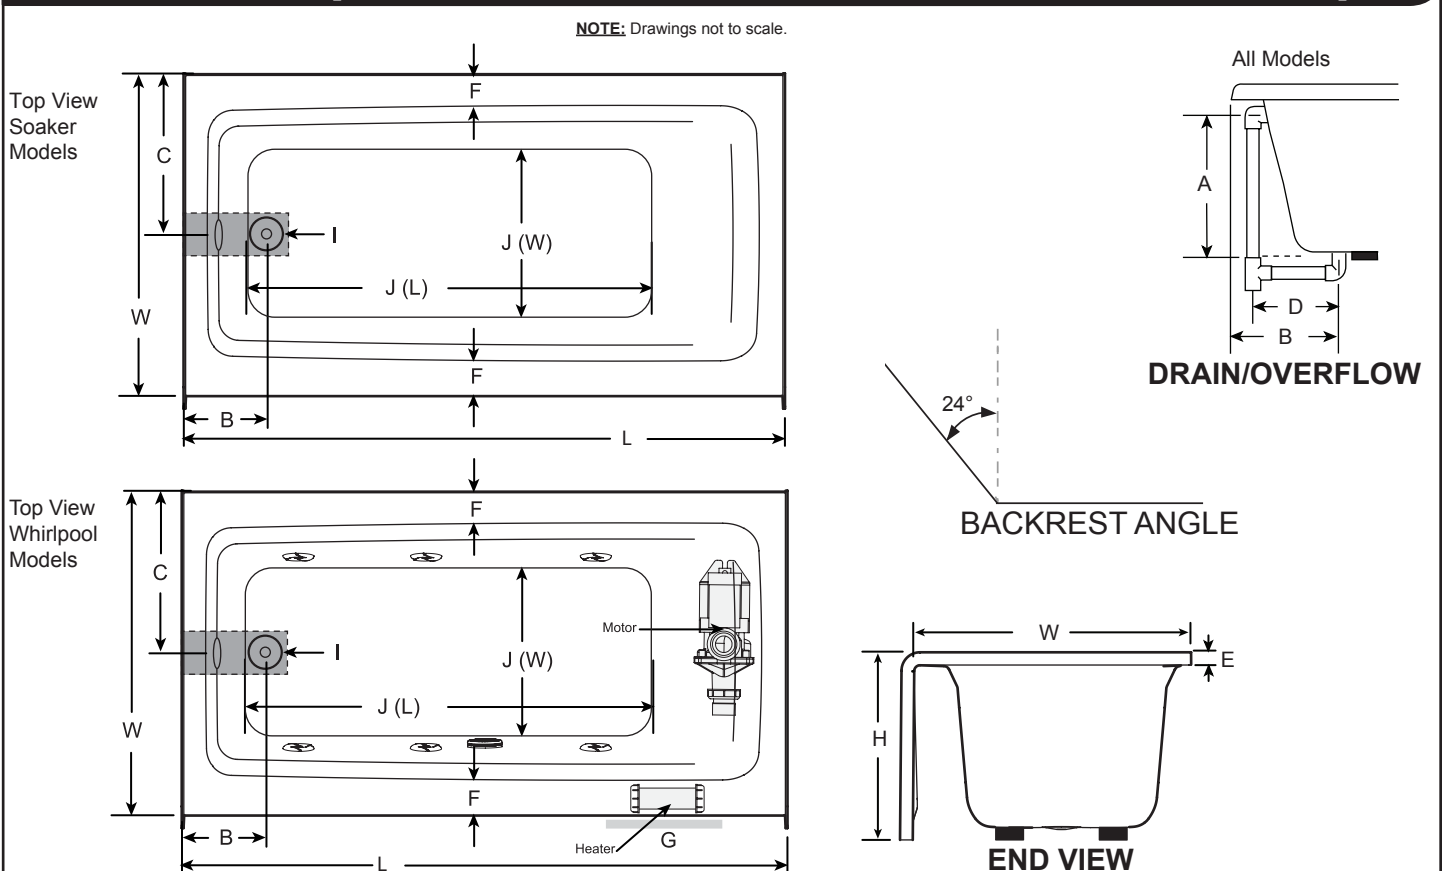


Signature® Collection Low-Profile 18" AFR Skirted Bathtubs

Letter	Description	SOAKER MODELS		WHIRLPOOL MODELS		WHIRLPOOL MODELS
		J186030B	J186032B	J186030W	J186032W	
-	Drain/Motor Location	LH / RH Drain		LH / RH Drain & Right or Left Side Motor		Each component requires a separate, dedicated GFCI protected circuit
-	Cutout	N/A		N/A		
-	Total Weight	659 lbs (299 kg)	660 lbs (299 kg)	672 lbs (305 kg)	672 lbs (305 kg)	
-	Floor Loading	53 lb/ft ² (257 kg/m ²)	53 lb/ft ² (258 kg/m ²)	54 lb/ft ² (262 kg/m ²)	54 lb/ft ² (263 kg/m ²)	
-	Operating Gallons (Min/Max)	43 gallons (163 liters)		40 / 43 gallons (151 / 163 liters)		Model with components
-	Product Weight	50 lbs (23 kg)	51 lbs (23 kg)	63 lbs (29 kg)	64 lbs (29 kg)	
-	Soaking Depth	11" (279 mm)		11" (279 mm)		Motor/Pump
L	Outer Length	60" (1524 mm)		60" (1524 mm)		
W	Outer Width	30" (762 mm)	32" (813 mm)	30" (762 mm)	32" (813 mm)	Heater (if available)
H	Overall Height	18" (457 mm)		18" (457 mm)		
A	Overflow Height	13.5" (343 mm)		13.5" (343 mm)		120V 15A
B	Long Edge to Drain Center	10.25" (260 mm)		10.25" (260 mm)		
C	Short Edge to Drain Center	14.25" (362 mm)	16.25" (413 mm)	14.25" (362 mm)	16.25" (413 mm)	120V 15A
D	Drain Shoe Length	6" (152 mm)		6" (152 mm)		
E	Flange Height	1.25" (32 mm)		1.25" (32 mm)		
F	Deck Width	2.25" (57 mm)		2.25" (57 mm)		
G	Service Access Dimensions	N/A		Requires Separate Access		
I	Floor Cutout for Drain	12" x 4" (305 mm x 102 mm)		12" x 4" (305 mm x 102 mm)		
J	Interior Dimensions Bottom of Bath J(L) x J(W)	43.5" x 20.5" (1105 mm x 521 mm)		43.5" x 20.5" (1105 mm x 521 mm)		
K	Interior Dimensions Top of Bath K(L) x K(W)	51.25" x 25" (1302 mm x 635 mm)		51.25" x 25" (1302 mm x 635 mm)		

KEY DIMENSIONS* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]


©2019 Jacuzzi Inc. • For additional information, call Customer Service 800-288-4002 • www.jacuzzi.com/baths
 Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.