

**Projecta™ 6030 - 6032 Low-Profile 18" AFR Skirted Whirlpool Bathtubs**

Letter	Description	Whirlpool Models	
		R186030W	R186032W
-	Drain/Motor Location	LH / RH Drain & Right or Left Side Motor	
-	Cutout	N/A	
-	Total Weight	672 lbs (305 kg)	672 lbs (305 kg)
-	Floor Loading	54 lb/ft ² (262 kg/m ²)	54 lb/ft ² (263 kg/m ²)
-	Operating Gallons (Min/Max)	40 / 43 gallons (151 / 163 liters)	
-	Product Weight	63 lbs (29 kg)	64 lbs (29 kg)
-	Soaking Depth	11" (279 mm)	
L	Outer Length	60" (1524 mm)	
W	Outer Width	30" (762 mm)	32" (813 mm)
H	Overall Height	18" (457 mm)	
A	Overflow Height	13.5" (343 mm)	
B	Long Edge to Drain Center	10.25" (260 mm)	
C	Short Edge to Drain Center	14.25" (362 mm)	16.25" (413 mm)
D	Drain Shoe Length	6" (152 mm)	
E	Flange Height	1.25" (32 mm)	
F	Deck Width	2.25" (57 mm)	
G	Service Access Dimensions	Requires Separate Access	
I	Floor Cutout for Drain	12" x 4" (305 mm x 102 mm)	
J	Interior Dimensions Bottom of Bath J(L) x J(W)	43.5" x 20.5" (1105 mm x 521 mm)	
K	Interior Dimensions Top of Bath K(L) x K(W)	51.25" x 25" (1302 mm x 635 mm)	




WHIRLPOOL MODELS

Each component requires a separate, dedicated GFCI protected circuit


Model with components	GFCI Outlet (60Hz)
Motor/Pump	120V 15A
Heater (if available)	120V 15A

KEY DIMENSIONS* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]

NOTE: Drawings not to scale.

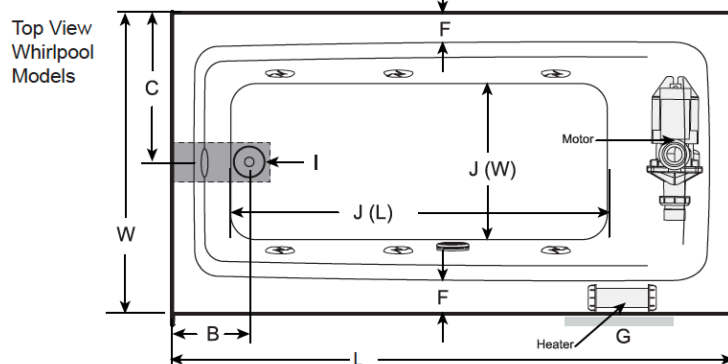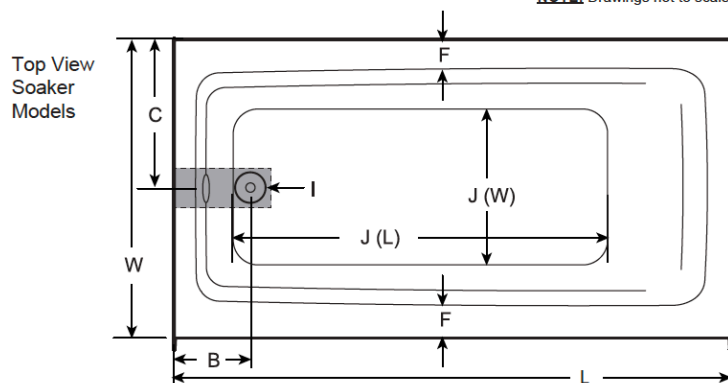

24°
BACKREST ANGLE

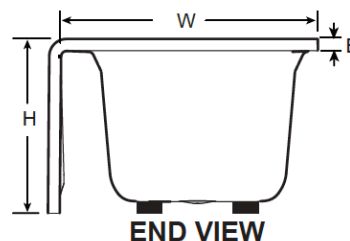

©2019 Jacuzzi Luxury Bath • For additional information, call Customer Service 800-288-4002 • www.jacuzzi.com/baths

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE