# TECHNICAL SPECIFICATIONS

## Luxura® 5 Whirlpool Bath with Integral Skirt

LXS6032  WLR  2XX        Luxura 5 Whirlpool Bath with Integral Skirt Left Hand (N600)

LXS6032  WRL  2XX        Luxura 5 Whirlpool Bath with Integral Skirt Right Hand (N605)

## Luxura® 5 Bath with Integral Skirt

LXS6032  BRX  XXX        Luxura 5 Bath with Integral Skirt Right Hand (N606)

LXS6032  BLX  XXX        Luxura 5 Bath with Integral Skirt Left Hand (N601)

**Jacuzzi®**

INSTALLATION NOTES
Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## KEY DIMENSIONS

DIMENSIONS
60" L x 32" W x 20-¼" H
(1524 mm) L x  (813 mm) W x (514 mm) H
DRAIN/OVERFLOW
A: 15-¼" (387 mm) B: 8-¼" (210 mm)
CUTOUT
Not Applicable
TOTAL WEIGHT
N600, N605: 700 lb (318 kg) / 53 lb/sq. ft. (259 kg/m$^2$)
N601, N606: 675 lb (306 kg) / 51 lb/sq. ft. (247 kg/m$^2$)
OPERATING GALLONAGE
N601, N605: 42 U.S. Gal. (159 Liters)
N601, N605: Max. 50 U.S. Gal. (189 Liters)
PRODUCT WEIGHT
N600, N605: 100 lb (45 kg)
N601, N606: 75 lb (34 kg)
SKIRT MOUNTING
Integral
ELECTRICAL SPECIFICATIONS MODELS N600, N605 ONLY
Requires a dedicated GFCI protected separate circuit.
Motor/Pump: 120 VAC, 15 AMP,  60 Hz.
RapidHeat™: 120 VAC, 15 AMP,  60 Hz.
HEATER (OPTIONAL) MODELS N600, N605 ONLY
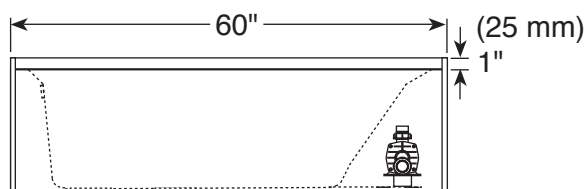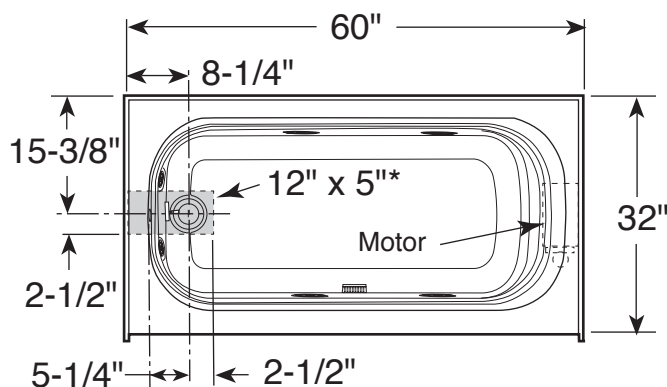Requires a dedicated GFCI protected separate circuit.
RapidHeat™: P/N S750000

Product Shown: Luxura 5 Whirlpool Bath with Integral Skirt Left Hand  Model: N600
* Measurements  inside unit represent cutout in floor to allow for drain/overflow.

## FEATURES, UPGRADES & ACCESSORIES

• Right and Left Hand Drain Location
• Accessories / Hardware:
   Trip-Lever Drain Kit #X559
   Rotary Drain Kit, 26" Cable #8730
   TheraPro Jet Trim Kit: #GU44
   AccuPro Jet Trim Kit: #GU45
• Trim Kit Finishes Available:
   (827) – Chrome
   (826) – Brushed Nickel
   (845) – Oil Rubbed Bronze



60"
8-1/4"
15-3/8"
12" x 5"*
Motor
32"
2-1/2"
5-1/4"
2-1/2"



60"          (25 mm)
1"

SIDE VIEW

W
H

END VIEW

A
B

DRAIN/OVERFLOW