

Riva® 6638 Whirlpool and Soaking Bathtubs

Letter	Description	Whirlpool	Soaking
-	Drain Location	Left Hand / Right Hand	End
-	Whirlpool Pump Location	Opposite end of drain location	N/A
-	Cutout	P/N FX40000	
-	Total Weight	823 lb (373 kg)	805 lb (365 kg)
-	Floor Loading	47 lb/ft ² (229 kg/m ²)	46 lb/ft ² (225 kg/m ²)
-	Operating Gallons (Min/Max)	44 Gal (166 L) / 56 Gal (212 L)	
-	Product Weight	107 lb (49 kg)	89 lb (40 kg)
L	Outer Length	66.00" (1676 mm)	
W	Outer Width	38.00" (965 mm)	
H	Overall Height	19.50" (495 mm)	
A	Overflow Height	17.50" (445 mm)	
B	Long Edge to Drain Center	9.50" (241 mm)	
C	Short Edge to Drain Center	19.00" (483 mm)	
D	Drain Shoe Length	6.75" (171 mm)	
E	Deck Height	2.00" (51mm)	
F	Deck Width	3.00" (76 mm)	
G	Service Access Dimensions	12.00" x 18.00" (305mm x 457mm)	N/A
I	Floor Cutout for Drain	12.00 x 4.00" (305 mm x 102 mm)	
J	Interior Dimensions (JW x JL)	25.00" x 45.00" (635 mm x 1143 mm)	

NOTE

The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).

Electrical Specifications

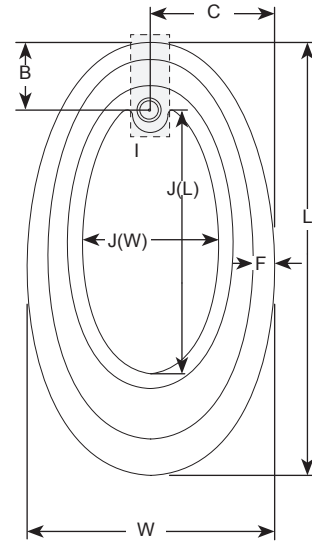
(Each component requires a separate, dedicated GFCI protected circuit)

Motor/Pump

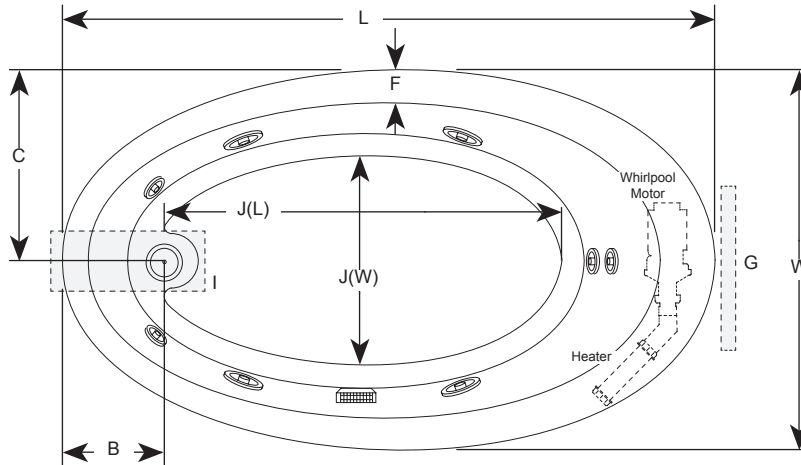
120V 15A 60HZ

Heater (optional)

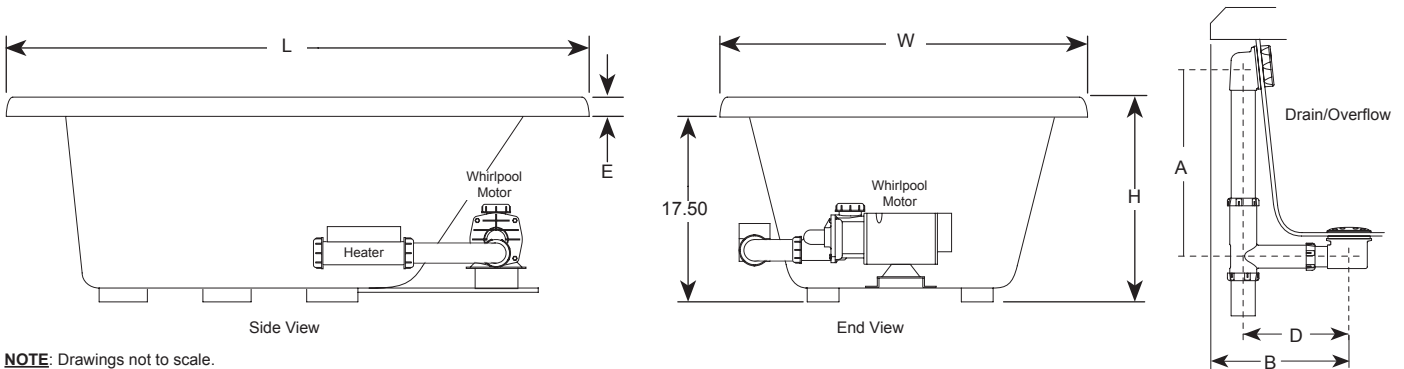
120V 15A 60HZ


Soaking Bathtub
Key Dimensions

(Left End Drain / Right Side Whirlpool Pump shown)



*Deck width reflects only area indicated on detail.


NOTE: Drawings not to scale.