


36"/30" RECIRCULATING WALL-MOUNT CANOPY HOODS


JJVR0436HS – 35 29/32" x 38 19/32"-50 13/32" x 17 63/64"

JJVR0430HS – 29 29/32" x 38 19/32"-50 13/32" x 17 61/64"


PRODUCT DIMENSIONS

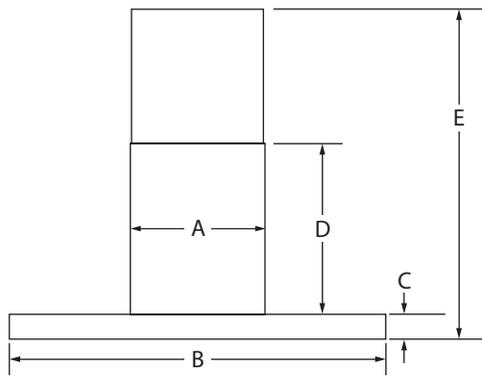

FRONT VIEW

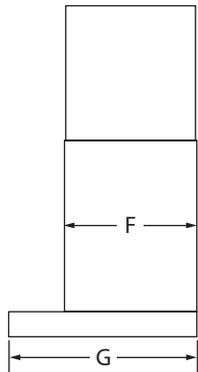

SIDE VIEW

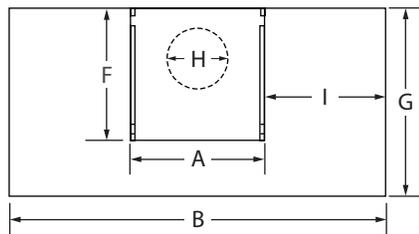

TOP VIEW


MODEL #		JJVR0436HS		JJVR0430HS	
		in	cm	in	cm
A	Width of chimney	12 ^{13/16}	32.5	12 ^{13/16}	32.5
B	Width of hood	35 ^{15/16}	91.3	29 ^{15/16}	76.0
C	Height of hood	2 3/8	6.0	2 3/8	6.0
D	Height of chimney	15 3/4	40.0	15 3/4	40.0
E	Overall height with vented installation (min.-max.)	38 5/8 - 49 1/8	98.1 - 124.8	38 5/8 - 49 1/8	98.1 - 124.8
F	Depth of chimney	12 5/8	32.1	12 5/8	32.1
G	Depth of hood	17 ^{15/16}	45.6	17 ^{15/16}	45.6
H	Vent collar diameter	5 7/8	15.0	5 7/8	15.0
I	Width from chimney to edge of hood	11 9/16	29.3	8 9/16	21.7

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

36" RECIRCULATING WALL-MOUNT CANOPY HOOD

JJVR0436HS – 35 29/32" x 38 19/32"-50 13/32" x 18"
 JJVR0430HS – 29 29/32" x 38 19/32"-50 13/32" x 17 61/64"

OPENING/CLEARANCE DIMENSIONS

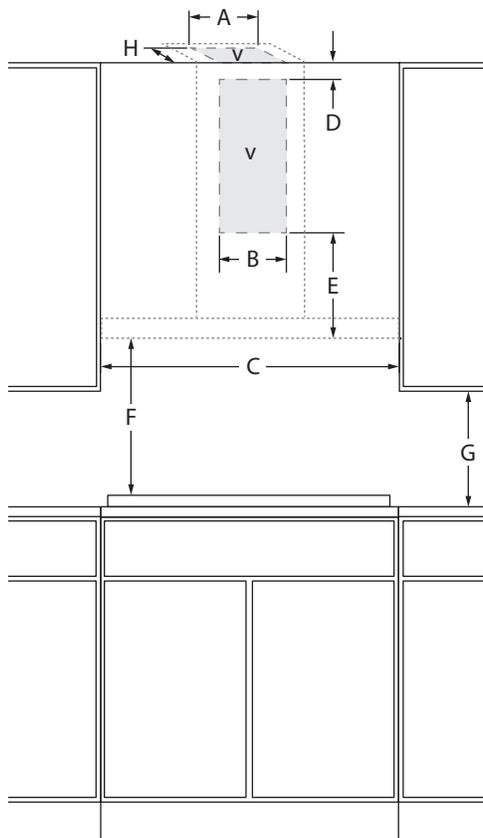

FRONT VIEW

MODEL #		JJVR0436HS		JJVR0430HS	
		in	cm	in	cm
A	Width of entry location for vent and power supply – ceiling option (min.-max.)	10-13	25.4-33.0	10-13	25.4-33.0
B	Width of entry location for vent and power supply – wall option (min.-max.)	10-13	25.4-33.0	10-13	25.4-33.0
C	Width of cabinet opening (min.)	36	91.4	30	76.2
D	Minimum height from entry location to ceiling for vent and power supply – wall option (non-vented installation)	9	22.9	9	22.9
E	Height from hood to entry location for vent and power supply – wall option (min.)	19 ^{11/16}	50.0	19 ^{11/16}	50.0
F	Suggested distance from hood to electric cooking surface (min.-max.)	24-36	61.0-91.4	24-36	61.0-91.4
	Suggested distance from hood to gas cooking surface (min.-max.)	30-36	76.2-91.4	30-36	76.2-91.4
G	Height from upper cabinet to countertop (min.)	18	45.7	18	45.7
H	Depth of entry location for vent and power supply – ceiling option	9½	24.1	9½	24.1
v	Recommended vent and power supply entry location				

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

VENTING REQUIREMENTS

The hood is factory set for venting through the roof or wall. For non-vented (recirculating) installation, refer to recirculation kit instructions for further information.

LOCATION REQUIREMENTS

Ceiling structure must be able to support 100 lb (45.4 kg).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 8' 2 5/8" (2.50 m) and 10' 7 1/2" (3.24 m).

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

