
IE 42NIVEVEDE

# 42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR


(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF42NXFXDE – 41¾" x 82¾" x 24" (without door/handles)

## PRODUCT DIMENSIONS

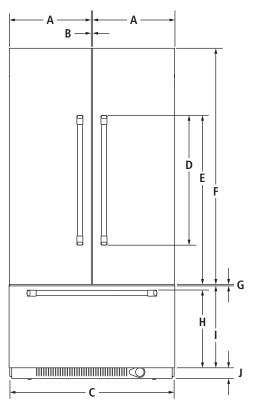

**FRONT VIEW** 

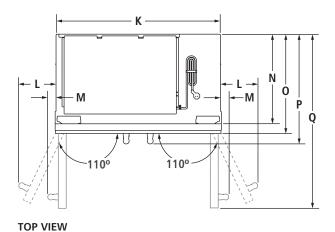

MODEL #		JF42N	JF42NXFXDE	
		in	cm	
Α	Width of each door	2013/16	52.9	
В	Space between doors	1/8	0.3	
С	Overall width	413/4	106.0	
D	Height of door handles Pro-Style® Stainless	323/8	82.2	
	Euro-Style Stainless	37%	96.0	
E	Height to top of door handles Pro-Style® Stainless	423/8	107.6	
	Euro-Style Stainless	447/8	114.0	
F	Height of doors	591/8	150.2	
G	Space between doors and drawer	1/8	0.3	
н	Height to top of drawer handle Pro-Style® Stainless	19¾	49.2	
	Euro-Style Stainless	191/4	48.7	
	Height of drawer	201/2	52.1	
	Height of bottom grille	3	7.6	
K	Width of recessed refrigerator	41	104.1	
L	Width from side of refrigerator to handle – door fully open 110° Pro-Style® Stainless	77/8	20.0	
	Euro-Style Stainless	71/4	18.5	
М	Width from side of refrigerator to handle – door open 90° Pro-Style® Stainless	2	5.1	
	Euro-Style Stainless	11/2	3.9	
N	Depth without door panel kit	24	61.0	
0	Depth with doors Pro-Style® Stainless panel kit	243/4	62.9	
	Euro-Style Stainless panel kit	243/4	62.9	
	Custom panel (3/4"/1.9 cm)	243/4	62.9	
Р	Depth with handles Pro-Style® Stainless	273/8	69.5	
	Euro-Style Stainless	267/8	68.3	
Q	Depth with doors open 90°	44	111.8	




# 42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF42NXFXDE – 41¾" x 82¾" x 24" (without door/handles)

## **DIMENSIONS AS INSTALLED**

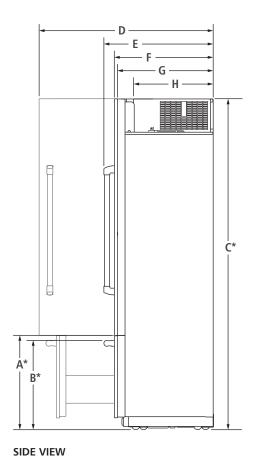

MODEL #		JF42NXFXDE	
		in	cm
<b>A</b> *	Height to top of drawer (min.)	23½	59.7
В*	Height to top of drawer handle (min.)		
	Pro-Style® Stainless	223/8	56.8
	Euro-Style Stainless	221/4	56.3
<b>C</b> *	Height to top of doors (min.)	827/8	210.5
D	Depth with door open 90° (min.)	43¾	111.1
E	Depth with handles (min.)		
	Pro-Style® Stainless	273/8	69.5
	Euro-Style Stainless	267/8	68.3
F	Depth with doors (min.)		
	Pro-Style® Stainless panel kit	243/4	62.9
	Euro-Style Stainless panel kit	243/4	62.9
	Custom panel (¾"/1.9 cm)	243/4	62.9
G	Depth without door panel kit (min.)	24	61.0
Н	Depth of compressor (min.)	197/8	50.5

<sup>\*</sup>Add 11/4" (3.2 cm) to the height dimension when leveling legs are fully extended.


# 42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)


JF42NXFXDE – 41¾" x 82¾" x 24" (without door/handles)

### DOOR PANEL INSTALLATION


ARMOIRE-STYLE INSTALLATION\*

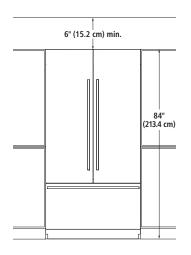

FRONT VIEW – OPEN TO CEILING (OPTION 1)

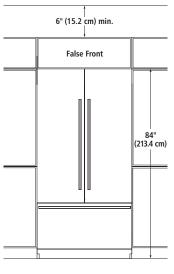

FRONT VIEW – FALSE FRONT (OPTION 2)

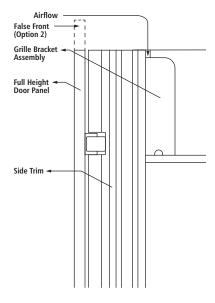

SIDE VIEW - CUSTOM PANEL


- Attach the grille bracket assembly and grille panel provided in the armoire-style panel kit
- Requires a minimum of 6" (15.2 cm) of open space above the refrigerator, which must not be blocked in any way, including soffits
  - \* Refer to the Armoire Kit installation instructions for additional dimensions and installation details.


### 42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF42NXFXDE – 41¾" x 82¾" x 24" (without door/handles)

#### OPENING/CLEARANCE DIMENSIONS

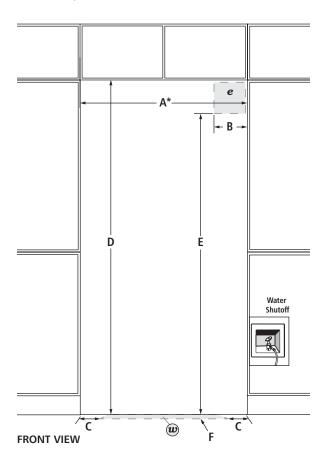

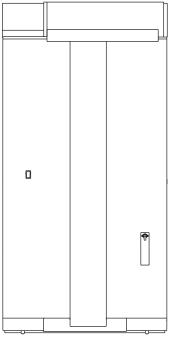

MODEL #		JF42NXFXDE	
		in	cm
<b>A</b> *	Width (min.)	42	106.7
В	Width of recommended electrical location	71/2	19.1
С	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	84	213.4
E	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
e	Recommended electrical connection location		
w	Recommended water connection locatio	n	

<sup>\*</sup>A minimum 2" (5.1 cm) furniture return must extend behind the face of the cabinet on all sides.

#### **ELECTRICAL REQUIREMENTS**

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

## WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

#### **Reverse Osmosis Water Supply**

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

#### **LOCATION REQUIREMENTS**

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.

### **BACK VIEW**

