




QAS142 • KAYLEE

LOW VOLTAGE MONORAIL
QUICK ADAPT SPOTS

Type	
Project	
Catalog No.	

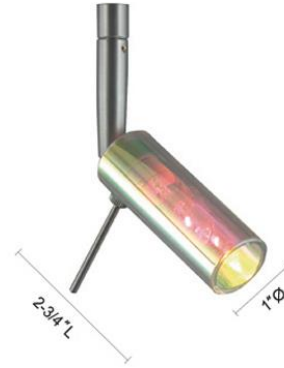

CATALOG INFORMATION

MODEL	LAMP	MAX WATT	STEM LENGTH	DIMENSIONS	FINISH
QAS 142 KAYLEE	JC Bi-Pin 12V/24V	20W	X3 – 3"	1"Ø x 2-3/4"L	CH – Chrome SN – Satin Nickel

Ordering Instructions **MODEL** **LENGTH** – **SOCKET**
 Example: –

Example: QAS142X3-CH

DESCRIPTION

- Mini tube with Dichroic glass shade.
- Quick Adapt Spot includes a Quick Adapt Jack, and Halogen JC Bi-Pin 12V 20W lamp.
- May be used with Jesco Monorail Systems, Standard Track Systems, or with Monopoint/Multipoint Systems – See COMPATIBLE SYSTEMS.

LAMPING:
 JC Bi-Pin 12V 20W included.
 Optional: 24V lamp, requires appropriate power supply (not supplied).

AIMING:
 90° vertical and 360° rotation.

LISTING:
 ETL Listed.

COMPATIBLE SYSTEMS



MONORAIL SYSTEM
 The Monorail Fixture Adapter MA-FA (sold separately) provides the connection between the Quick Adapt Spot to the Monorail.



STANDARD TRACK SYSTEM
 The Standard Track Adapter MA-TA-H (sold separately) enables the use of Quick Adapt Spots in Standard, Line Voltage H-Track Systems. Includes a 50W electronic transformer. Dimmable with an electronic or standard incandescent dimmer.



MONOPOINT / MULTIPOINT SYSTEM
 Quick Adapt Spots may be directly mounted onto Monopoint or Multipoint canopies, which have built-in or remote transformer options.