



CM402 CLASSIC ROUND

Ceiling Fixture or ADA Sconce
with Acrylic Shade
Line Voltage LED Fixture

| | |
|-------------|--|
| Type | |
| Project | |
| Catalog No. | |



DESCRIPTION

The CM402 series is the next generation of residential and commercial fixtures incorporating JESCO's *exclusive Driverless AC LED* technology. Operating directly off of AC voltage, no secondary LED driver is required. The round, impact resistant, acrylic lens is available in either a 11" or 13" diameter. The 11" fixture incorporates a 15W LED module which emits 1120 lumens from the fixture providing a similar lumen output to a 75W incandescent lamp. The 13" fixture uses a 23W LED module emitting 1560 lumens from the fixture providing a similar light output to a 100W incandescent lamp. Both fixtures can be dimmed by most standard incandescent, electronic or magnetic low voltage, and CFL/LED dimmers. Operating at 277 VAC can be accomplished with an additional transformer.

FEATURES

- Up to 1560 lumens emitted from fixture
- JESCO's *exclusive Driverless AC LED* technology eliminates the need for an in-line or secondary LED driver. Incorporated with our advanced heat sink design, the fixture provides superior thermal management for true 50,000 hours of operation with 70% lumen maintenance
- Patent pending inrush current / surge protection designed to prevent damage to both LED module and dimmer
- 90 CRI available in all color temperatures
- Available in 2700K, 3000K and 4000K
- Dimmable 10-100% with most leading or trailing edge incandescent or low voltage dimmers
- ADA compliant wall sconce
- Suitable for use in closet applications
- Eco Friendly – No mercury or hazardous material

SPECIFICATIONS

| | | | | |
|-----------------------|---|----------|----------------------|----------|
| Model | CM402-S-xx-xx | | CM402-M-xx-xx | |
| Description | LED Ceiling Fixture or ADA Sconce | | | |
| Input Voltage | 120 VAC | | | |
| Wattage | 15W | | 23W | |
| CCT | 3000K 4000K | 2700K†♦ | 3000K 4000K | 2700K†♦ |
| CRI | 80+* | 90 | 80+* | 90 |
| Lumens | 1000Lm 1120Lm | 900Lm | 1420Lm 1560Lm | 1270Lm |
| Efficacy* | 66.7Lm/W 74.7Lm/W | 60.0Lm/W | 61.7Lm/W 67.8Lm/W | 55.2Lm/W |
| Power Factor | >0.90 | | | |
| Dimming** | 10-100% Triac, ELV, MLV, CFL/LED | | | |
| Dimensions*** | 11 3/8" Ø x 3 1/2" | | 14 3/8" Ø x 3 7/8" | |
| L₇₀ | 50,000 hours | | | |
| Finish | White, Brushed Nickel, Brushed Aluminum | | | |
| Environment | Indoor - Dry | | | |
| Certifications | | | | |
| Warranty | 5 Years – see published warranty terms for detailed information | | | |

*90 CRI available. Call factory for details.



** Recommended:

- Thirty 15W or twenty 23W fixture maximum run on one 600W dimmer
- Fifteen 15W or ten 23W fixture maximum run on one 300W dimmer

See reverse side for recommended list of dimmers

*** Dimensions on reverse side

♦ 2700K – Title 24

ORDERING INSTRUCTIONS

| | | | | | | | |
|--------------|--------------|---|--------------------|---|---|---|--|
| MODEL | SHAPE | - | SIZE | - | CCT | - | FINISH |
| CM | 402 | - | | - | | - | |
| CM – Series | 402 – Round | | S – 11" M – 13" | | 30 – 3000K 40 – 4000K 27 – 2700K† | | WH – White BN – Brushed Nickel BA – Brushed Aluminum |

Example: **CM402-M-30-WH**

† Contact factory for details



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Rev 10
12/16/2014

Specifications subject to change without notice.





CM402 CLASSIC ROUND

Ceiling Fixture or ADA Sconce
with Acrylic Shade
Line Voltage LED Fixture

| | |
|-------------|--|
| Type | |
| Project | |
| Catalog No. | |

DIMENSIONS

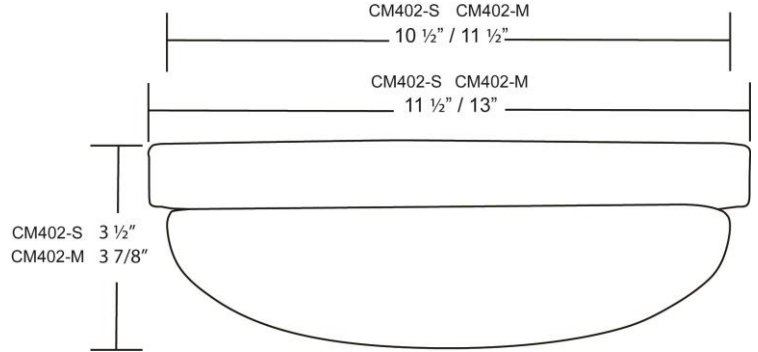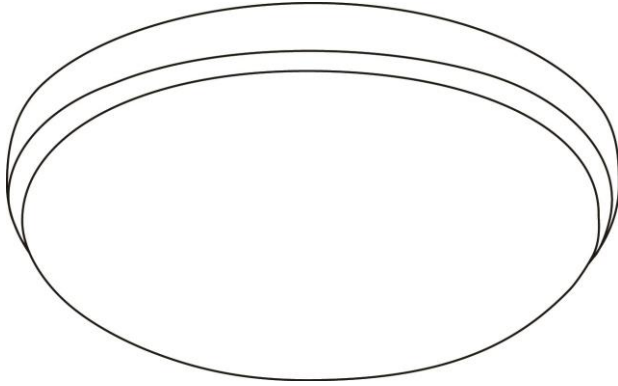

COMPATIBLE DIMMERS

| MANUFACTURER | STYLE | MODEL NUMBER | TYPE |
|----------------|-----------------|--------------|-----------------------------------|
| Lutron | Diva | DVCL-153P | (CFL/LED) |
| | Diva | DVELV-303P | (Electronic Low Voltage) |
| | Diva | DVLV-600P | (Magnetic Low Voltage) |
| | Maestro | MACL-153M | (CFL/LED) |
| | Maestro | MFR2-6DN-120 | (Spec Grade) |
| | Skylark | SELV-300P | (Electronic Low Voltage) |
| | Skylark | S-600 | (Incandescent) |
| | Skylark Contour | CTCL-153P | (CFL/LED) |
| Leviton | Acenti | Ate06-1LW | (Electronic Low Voltage) |
| | Trimatron | 705 | (Incandescent) |
| Cooper | Devine | D106P | (Incandescent/Magnet/Low Voltage) |
| Pass & Seymour | Harmony | | (Incandescent 600W) |