

Туре	
Project	
Catalog No.	

TRACK SYSTEMS












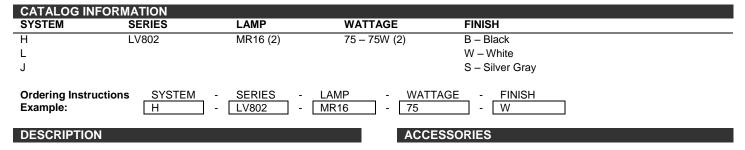

- Low voltage track head. Aluminum die cast construction with twin head, curved yoke and gimbal style.
- On/Off switch for individual fixture control.
- Thumb-screw secures aiming angles.
- Fixture features black cross blade for glare reduction.
- For use with Jesco H, L and J track systems. May also be used with other compatible track brands (consult Tech Department).

LAMPING:

Use Low Volt (2) MR16, 12V 75W maximum per lamp. (Lamp not included). GU5.3 base ceramic bi-pin socket. Clear glass lens included.

AIMING:

330° vertical and 200° rotation.

TRANSFORMER:

Electronic low voltage, dimmable with standard or electronic low volt dimmers.

MATERIALS:

Aluminum die cast construction.

LISTING:

UL & CUL Listed.

Dichroic Lens Color Lens Softener Diffuser UV Filter Frosted Diffuser Honeycomb Louver

LENS-16-DI-RD, BU, YW, GN LENS-16-RD, BU, YW, GN LENS-16-SOFT LENS-16-UV LENS-16-FROS LENS-16-HCOM

RD: Red, BU: Blue, YW: Yellow, GN: Green

MATCHING FIXTURES





www.jescolighting.com support@jescolighting.com Tech Support: 855.592.0029

15 Harbor Park Drive Port Washington, NY 11050 Main Line: 800.527.7796 Fax Line: 855.265.5768

219 South 6th Ave City of Industry, CA 91746 Main Line: 855.654.0110 Fax Line: 626.333.2955

Rev 8 8/7/2014