




LV3001R

RECESSED LIGHTING
3" APERTURE LOW VOLTAGE HOUSINGS

Type	
Project	
Catalog No.	

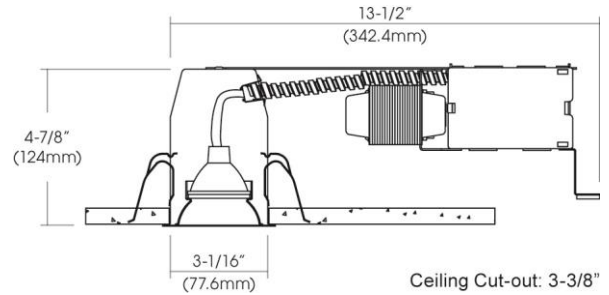

COMPATIBLE TRIMS

GENERAL ILLUMINATION				ACCENT		WALL WASH	WET LOCATIONS	
Baffle	Reflector	Slot	Glass	Gimbal	Eyeball		TM309*	TM315*
TM301	TM302	TM303	TM320	TM308	TM306	TM304		

Complete Fixture consists of Housing and Trim. Order separately. See trim specification sheet for details.
* 35W max.

DESCRIPTION

3" aperture low voltage recessed housing for general illumination, accent, wall wash and wet location. Designed for use in non-insulated ceiling or insulated ceiling where insulation are kept at a minimum distance of 3" from all sides. Can be installed from below ceiling.

HOUSING:
White-painted galvanized steel. 4-7/8" height allows for use in 2" x 6" joist.

JUNCTION BOX
UL Listed for a maximum of 8 12AWG through branch circuit conductors suitable for 90°C. (5) 1/2" knockouts with pry-out slots and (4) knockouts with integral cable clamps for attachment of nonmetallic Romex cable.

MOUNTING CLIPS
(3) integral clips secure housing to ceiling thickness of 1/2" to 5/8".

SOCKET
Ceramic socket with aluminum heat shield for Bi Pin MR16 lamp.

TRANSFORMER
Magnetic 120V primary to 12V secondary 50W max. Accessible below ceiling.

THERMAL PROTECTOR
Thermal protection device safe guard against overheating and improper installation.

DIMMING
Use only dimmers specifically designed for use with magnetic low voltage transformers. May be advertised as MLV, standard phase control or leading edge. May produce audible sound when used with dimmer.

LABELS
UL and cUL Listed to UL and CSA standards for non-IC applications in damp locations.



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Rev 24
8/7/2014

Specifications subject to change without notice.