



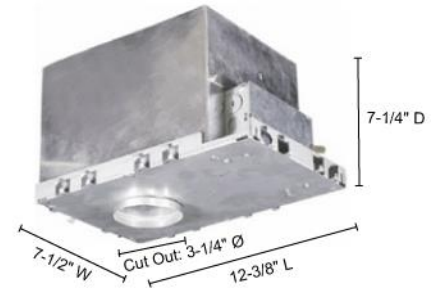

RS3000ICA

RECESSED LIGHTING
3" NEW CONSTRUCTION LINE VOLTAGE
AIRTIGHT IC

Type	
Project	
Catalog No.	

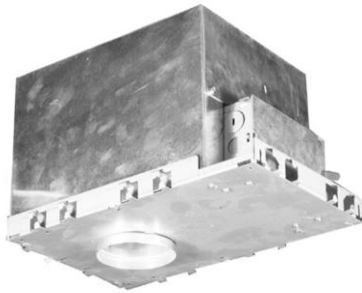

ORDERING INSTRUCTIONS

MODEL: RS3000ICA

DESCRIPTION

- Thermally protected, listed for damp locations
- UL listed for feed-through branch circuit wiring.
- Dimmable with standard line-voltage incandescent dimmers.
- Remodeling downlight housing allows wiring below ceiling plane.
- J-box accessible through ceiling cut-out.
- 3-inch Non-IC housings fit into tight 6-inch joist ceiling spaces.
- Airtight IC units may be covered with insulation to conserve energy, and are gasketed to prevent airflow through the housing from heating or cooling systems. Compliant with State of Washington restricted airflow requirements (WSEC code).
- Non-IC units require 3-inch clearances on all sides.
- Dimensions: 7-1/2"W x 12-3/8"L x 7-1/4"D
- Cut-Out: 3-1/4"Ø

LAMP:

IC Airtight MR16 GU10 120V 50W Max. Sold separately.

WIRING:

Housing is supplied with thermal protector

OTHER OPTIONS



RS3000R

Non-IC MH Housing for Remodel
GU10 120V 50W
Dimensions: 3-1/2"W x 11"L x 4"D
Cutout: 3-1/4"Ø



RS3000B

Non-IC Housing for New Construction
GU10 120V 50W
Dimensions: 5-1/4"W x 7-3/4"L x 4"D
Hanger Bars: up to 24"
Cutout: 3-1/4"Ø