




SG5A-xx

MINI FLUORESCENT SLEEK PLUS
ADJUSTABLE T5 • 3-WIRE GROUNDED SERIES

Type	
Project	
Catalog No.	

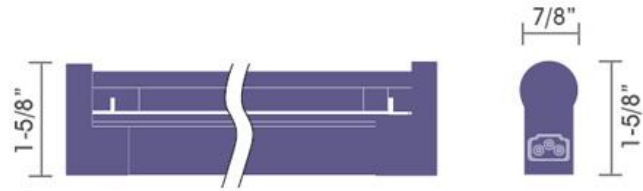

CATALOG INFORMATION

MODEL	DIMENSIONS	LAMPING	LUMENS*	COLOR OUTPUT	FINISH
SG5A-6**	9-1/2"L x 7/8"W x 1-5/8"H	T5 6W	480	30, 35, 41, 50, 64, BU, GN, RD, BK	W, S
SG5A-8**	12-1/2"L x 7/8"W x 1-5/8"H	T5 8W	600	30, 35, 41, 50, 64, BU, GN, RD, BK	W, S
SG5A-14	22-7/8"L x 7/8"W x 1-5/8"H	T5 14W	1350	30, 35, 41, 50, 64, BU, GN, RD, BK	W, S
SG5A-21	34-5/8"L x 7/8"W x 1-5/8"H	T5 21W	2150	30, 35, 41, 50, 64, BU, GN, RD, BK	W, S
SG5A-28	46-1/2"L x 7/8"W x 1-5/8"H	T5 28W	2900	30, 35, 41, 50, 64, BU, GN, RD, BK	W, S
SG5A-35	58-1/4"L x 7/8"W x 1-5/8"H	T5 35W	3650	30, 35, 41, 50, 64, BU, GN, RD, BK	W, S

* Based on 4100K lamps.

** The 6W and 8W fixtures are not available with a Rocker Switch.

Ordering Instructions

Examples:

MODEL	SWITCH	OUTPUT	FINISH	
SG5A-14	SW	30	W	With built-in Rocker Switch
SG5A-14		30	W	Without Rocker Switch

DESCRIPTION

- Sleek Plus Adjustable T5 fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Patent pending fixtures are furnished with replaceable lamps, tight-fit direct connectors, stainless steel mounting clips for vertical or horizontal mount, and ribbed acrylic lamp covers.
- Fixtures butt together reducing dark area to less than 1" and with minimal shadowing when they are connected directly.
- Optional On/Off Rocker Switch that does not increase the length of the fixture as it is located on the side.
- Lamp CRI > 82 with the use of tri-phosphor.
- Power and connector cables have separate UL listings.
- Functions with all code approved lighting branch circuits, including 15A and 20A, as the fixtures are not limited to any size circuit. The wiring is according to lighting circuit load ratings.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- Linkable up to 10 units, max 350 watts.
- Additional power supply cables, connecting cables, hard wire boxes and replacement lamps are sold separately.

COLOR OUTPUT

- 30 – 3000K
- 35 – 3500K
- 41 – 4100K
- 50 – 5000K
- 64 – 6400K
- BU – Blue
- GN – Green
- RD – Red
- BK – Black

FINISH

- W – White
- S – Silver

LAMPING:

The T5 lamps (included with fixtures) are energy efficient and long-life with a 20,000 hours rating.

BALLAST:

The fixture features a built-in programmed-start, no flickering, silent electronic ballast rated AC 120V 50-60Hz. 3-years commercial grade fluorescent ballast warranty.

CONSTRUCTION:

The housing is made of extruded aluminum with anodized silver or white enamel painted finish. Aluminum provides better heat dissipation, and longer fixture and lamp life.

LISTINGS:

UL & CUL Listed.
New York City approval.
FCC Part 18 Listed – tested for in-line and radiated interference.



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Rev 7
8/7/2014

Specifications subject to change without notice.



SG5A-xx

MINI FLUORESCENT SLEEK PLUS
ADJUSTABLE T5 • 3-WIRE GROUNDED SERIES

Type	
Project	
Catalog No.	

ACCESSORIES

FIXTURE	MODEL / DESCRIPTION	FIXTURE	MODEL / DESCRIPTION
	SG-DC: Direct Connector for end-to-end connection.		SG-MC-45: 45° Mounting Clip
	SG-B: Plastic Hard Wire Box with Control Switch 3-5/8"L x 2-1/4"W x 1-3/8"H		SP-PS6: Power Strip with 12 Outlets. Includes (1) Direct Connector (SP-DC) 72"L x 7/8"W x 7/8"H
	SG-BM: Commercial Grade Metal Hard Wire Box. Enables fixtures to be controlled by wall switch 2-3/4"L x 1-3/4"W x 1-3/4"H		SG-CC6: 6" Connecting Cable SG-CC12: 12" Connecting Cable SG-CC24: 24" Connecting Cable SG-CC36: 36" Connecting Cable
	SG-BM-SW Commercial Grade Metal Hardwire Box with Switch 3-1/2"L x 2"W x 1-1/8"H		SG-CC6L: 6" Right-Angle Connecting Cable SG-CC12L: 12" Right-Angle Connecting Cable SG-CC24L: 24" Right-Angle Connecting Cable SG-CC36L: 36" Right-Angle Connecting Cable
	SG-MC-VH: Stainless Steel Mounting Clip for Vertical & Horizontal Mount		SG-PC24-WH Power Cord & 3-Prong Plug – 2' White SG-PC72-W Power Cord & 3-Prong Plug – 6' White SG-PC72-G Power Cord & 3-Prong Plug – 6' Gray SG-PC96-W Power Cord & 3-Prong Plug – 8' White SG-PC144-W Power Cord & 3-Prong Plug – 12' White
	SG-MC-V: Stainless Steel Mounting Clip for Vertical Mount		SG-PCL: 6' Right Angle Power Cord & Plug – From Back
	SG-MC-A: Adjustable Mounting Clip		SG-PCLL: 6' Right Angle Power Cord & Plug – From Front



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Rev 7
8/7/2014

Specifications subject to change without notice.