




**SP4-xx**

**MINI FLUORESCENT SLEEK PLUS**  
T4 • 2-WIRE CLASSIC NON GROUNDED

Type	
Project	
Catalog No.	

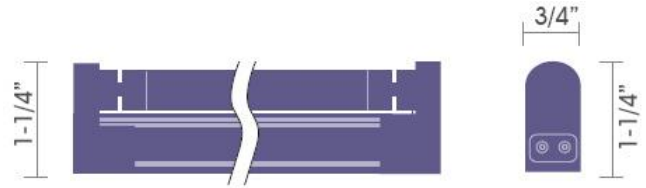

**CATALOG INFORMATION**

MODEL	DIMENSIONS	LAMPING	LUMENS*	COLOR OUTPUT	FINISH
SP4-6**	9-3/8"L x 3/4"W x 1-1/4"H	T4 6W	480	30, 41, 64, BU, GN, RD	W – White
SP4-8	13-1/2"L x 3/4"W x 1-1/4"H	T4 8W	600	30, 41, 64, BU, GN, RD	W – White
SP4-12	17-1/2"L x 3/4"W x 1-1/4"H	T4 12W	800	30, 41, 64, BU, GN, RD	W – White
SP4-16	19-1/2"L x 3/4"W x 1-1/4"H	T4 16W	1000	30, 41, 64, BU, GN, RD	W – White
SP4-20	21"L x 3/4"W x 1-1/4"H	T4 20W	1350	30, 41, 64, BU, GN, RD	W – White
SP4-24	34-1/2"L x 3/4"W x 1-1/4"H	T4 24W	2150	30, 41, 64, BU, GN, RD	W – White
SP4-26	40-3/8"L x 3/4"W x 1-1/4"H	T4 24W	2550	30, 41, 64, BU, GN, RD	W – White
SP4-28	46-1/4"L x 3/4"W x 1-1/4"H	T4 28W	2900	30, 41, 64, BU, GN, RD	W – White

\* Based on 4100K lamps.

\*\* The 6W fixture is not available with a Rocker Switch. A cord and plug with switch (SP-PCSW) may be ordered separately.

**Ordering Instructions**

**Examples:**

MODEL	SWITCH	/	OUTPUT	-	FINISH	
SP4-8	SW	/	30	-	W	With built-in Rocker Switch
SP4-8		/	30	-	W	Without Rocker Switch

**DESCRIPTION**

- Sleek Plus T4 fluorescent fixtures are furnished with replaceable lamps, tight-fit direct connectors, stainless steel mounting clips for vertical or horizontal mount, and ribbed acrylic lamp covers.
- Fixtures butt together reducing dark area to less than 1" and with minimal shadowing when they are connected directly.
- Optional On/Off Rocker Switch that does not increase the length of the fixture as it is located on the side.
- Lamp CRI > 82 with the use of tri-phosphor.
- Power and connector cables have separate UL listings.
- Functions with all code approved lighting branch circuits, including 15A and 20A, as the fixtures are not limited to any size circuit. The wiring is according to lighting circuit load ratings.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- Linkable up to 10 units, max 350 watts.
- Additional power supply cables, connecting cables, hard wire boxes and replacement lamps are sold separately.

**COLOR OUTPUT**

- 30 – 3000K
- 41 – 4100K
- 64 – 6400K
- BU – Blue
- GN – Green
- RD – Red

**LAMPING:**

The T4 lamps (included with fixtures) are energy efficient and long-life with a 16,000 hours rating.

**BALLAST:**

The fixture features a built-in programmed-start, no flickering, silent electronic ballast rated AC 120V 50-60Hz. 3-years commercial grade fluorescent ballast warranty.

**CONSTRUCTION:**

The housing is made of extruded aluminum with white enamel painted finish. Aluminum provides better heat dissipation, and longer fixture and lamp life.

**LISTINGS:**

UL & CUL Listed.  
New York City approval.  
FCC Part 18 Listed – tested for in-line and radiated interference.



www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6<sup>th</sup> Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955

Rev 9  
8/7/2014

Specifications subject to change without notice.



**SP4-xx**

**MINI FLUORESCENT SLEEK PLUS**  
T4 • 2-WIRE CLASSIC NON GROUNDED

Type	
Project	
Catalog No.	

**ACCESSORIES**

FIXTURE	MODEL / DESCRIPTION
	<b>SP-DC:</b> Direct Connector
	<b>SP-B:</b> Plastic Hard Wire Box with Control Switch 3-5/8"L x 2-1/4"W x 1-3/8"H
	<b>SP-BM:</b> Commercial Grade Metal Hard Wire Box. Enables fixtures to be controlled by wall switch 2-3/4"L x 1-3/4"W x 1-3/4"H
	<b>SG-MC-VH:</b> Stainless Steel Mounting Clip for Vertical & Horizontal Mount
	<b>SG-MC-V:</b> Stainless Steel Mounting Clip for Vertical Mount
	<b>SG-MC-45:</b> 45° Mounting Clip
	<b>SP-PS6:</b> Power Strip with 12 Outlets. Includes (1) Direct Connector (SP-DC) 72"L x 7/8"W x 7/8"H

FIXTURE	MODEL / DESCRIPTION
	<b>SP-CC6:</b> 6" Connecting Cable <b>SP-CC12:</b> 12" Connecting Cable <b>SP-CC24:</b> 24" Connecting Cable <b>SP-CC36:</b> 36" Connecting Cable
	<b>SP-CC6L:</b> 6" Right-Angle Connecting Cable <b>SP-CC12L:</b> 12" Right-Angle Connecting Cable <b>SP-CC24L:</b> 24" Right-Angle Connecting Cable <b>SP-CC36L:</b> 36" Right-Angle Connecting Cable
	<b>SP-PC72-W:</b> Power Cord & Plug 6' White
	<b>SP-PCSW:</b> 6' Power Cord & Plug with Switch
	<b>SP-PCL:</b> 6' Right Angle Power Cord & Plug – From Back
	<b>SP-PCLL:</b> 6' Right Angle Power Cord & Plug – From Front



www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6<sup>th</sup> Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955

Rev 9  
8/7/2014

Specifications subject to change without notice.