




TM212

RECESSED LIGHTING
4" APERTURE LINE VOLTAGE TRIMS

Type	
Project	
Catalog No.	

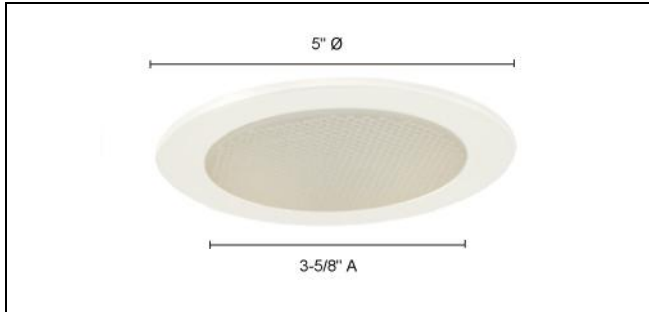

CATALOG INFORMATION

MODEL	TRIM FINISH
TM212	WH - White

Ordering Instructions Example: **MODEL** - **FINISH**
 Example: -

COMPATIBLE LINE VOLTAGE HOUSINGS



RS2000B
 Non-IC Universal Housing for New Construction
 PAR16/20 120V 50W
Dimensions: 5-1/4"W x 8"L x 5-1/2"D
Hanger Bars: adj. 14-1/2"~ 24-1/2"
Cutout: 4-3/8"Ø



RS2000IC
 IC Housing for New Construction
 PAR16/20 120V 50W
Dimensions: 5-1/4"W x 8"L x 6"D
Hanger Bars: adj. 14-1/2"~ 24-1/2"
Cutout: 4-3/8"Ø



RS2000R
 Non-IC Housing for Remodel
 PAR16/20 120V 50W
Dimensions: 4-5/8"W x 12"L x 5-1/2"D
Cutout: 4-3/8"Ø

DESCRIPTION

- Recessed Lighting – Shower Trim With Albalite Glass 4" aperture Line Voltage trim.
- Use PAR16, PAR20 120V 50W Max.
- Ideal for use in ceilings, cabinets and displays.
- Includes gasket for use in damp locations
- Dimensions: 3-5/8"A x 5"Ø
- Listings: UL and C-UL listed.

COMPATIBLE LINE VOLTAGE HOUSINGS



RS2000BA
 Non-IC Airtight Universal Housing for New Construction
 PAR16/20 120V 50W
Dimensions: 5-1/4"W x 8"L x 5-1/2"D
Hanger Bars: adj. 14-1/2"~ 24-1/2"
Cutout: 4-3/8"Ø



RS2000ICA
 IC Airtight Housing for New Construction
 PAR16/20 120V 50W
Dimensions: 5-1/4"W x 8"L x 6"D
Hanger Bars: adj. 14-1/2"~ 24-1/2"
Cutout: 4-3/8"Ø



RS2000RA
 Non-IC Airtight Housing for Remodel
 PAR16/20 120V 50W
Dimensions: 4-5/8"W x 12"L x 5-1/2"D
Cutout: 4-3/8"Ø