




TM309

RECESSED LIGHTING
3" APERTURE LINE VOLTAGE TRIMS

Type	
Project	
Catalog No.	

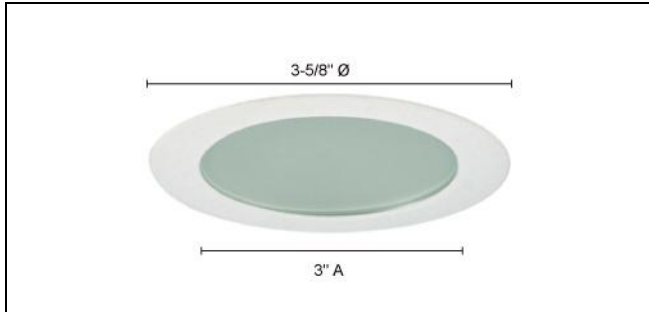

HOUSING	CEILING	MR16	GU10
LV3000B	Non-IC	50W	–
LV3000ICA	IC Airtight	35W	–
LV3000R	Non-IC	50W	–
RS3000B	Non-IC	–	50W
RS3000ICA	IC Airtight	–	35W
RS3000R	Non-IC	–	50W

CATALOG INFORMATION

MODEL	FINISH
TM309	AB* – Antique Bronze
	CH* – Chrome
	PB* – Polished Brass
	ST – Satin Chrome
	WH – White

** While supplies last only.*

DESCRIPTION

- Flat Shower Trim with Frosted Glass 3" aperture line and low voltage trim.
- Ideal for use in damp locations
- Includes gasket for use in damp locations
- Dimensions: 3"A x 3-5/8"Ø
- Listings: UL and C-UL listed.

Ordering Instructions **MODEL** – **FINISH**
 Example: –

COMPATIBLE LINE VOLTAGE HOUSINGS

	<p>RS3000B New Construction Non-IC Housing 120V GU10 50W Max. Dimensions: 5-1/4"W x 7-3/4"L x 4"D Hanger Bars: up to 24" Cutout: 3-1/4"Ø</p>
	<p>RS3000ICA New Construction IC Airtight Housing 120V GU10 35W Max. Dimensions: 7-1/2"W x 12-3/8"L x 7-1/4"D Hanger Bars: up to 26" Cutout: 3-1/4"Ø</p>
	<p>RS3000R Remodel Non-IC Housing 120V GU10 50W Max. Dimensions: 3-1/2"W x 11"L x 4"D Cutout: 3-1/4"Ø</p>

COMPATIBLE LOW VOLTAGE HOUSINGS

	<p>LV3000B New Construction Non-IC Housing 12V MR16 50W Max. Dimensions: 6-1/4"W x 16-1/4"L x 4"D Hanger Bars: up to 24" Cutout: 3-1/4"Ø</p>
	<p>LV3000ICA New Construction IC Airtight Housing 12V MR16 35W Max. Dimensions: 10-7/8"W x 17-1/4"L x 7-1/2"D Hanger Bars: up to 26" Cutout: 3-1/4"Ø</p>
	<p>LV3000R Remodel Non-IC Housing 12V MR16 50W max Dimensions: 3-1/2"W x 14-1/2"L x 4"D Cutout: 3-1/4"Ø</p>