




TM411

RECESSED LIGHTING
4" APERTURE LOW VOLTAGE TRIMS

Type	
Project	
Catalog No.	

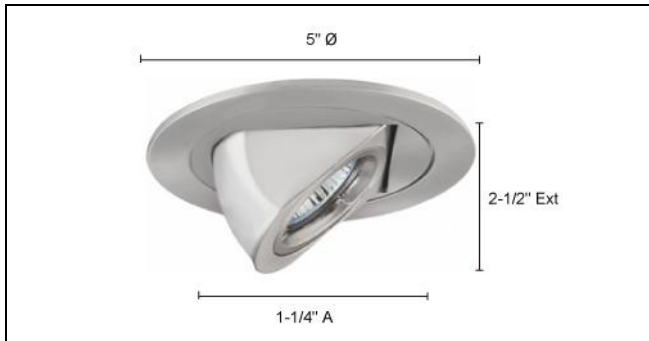

CATALOG INFORMATION

MODEL	TRIM FINISH
TM411	AB - Antique Bronze
	BK - Black
	CH - Chrome
	PB - Polished Brass
	ST - Satin Chrome
	WH - White

Ordering Instructions Example: **MODEL** - **FINISH**
 -

DESCRIPTION

- Recessed Lighting –Adjustable Periscope 4" aperture low voltage trim.
- Use MR16 12V 50W Max.
- Ideal for use in ceilings, cabinets and displays.
- 80° adjustment from vertical
- Dimensions: 1-1/4"A x 5"Ø x 2-1/2"Ext
- Listings: UL and C-UL listed.

COMPATIBLE LOW VOLTAGE HOUSINGS



LV4000B
 Non-IC Universal Housing for New Construction
 MR16 120V 50W
Dimensions: 5-1/4"W x 10-1/2"L x 5-1/2"D
Hanger Bars: adj. 14-1/2"~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000IC
 IC Housing for New Construction
 MR16 120V 50W
Dimensions: 7-3/4"W x 12-1/4"L x 7"D
Hanger Bars: adj. 14-1/2"~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000R
 Non-IC Housing for Remodel
 MR16 120V 50W
Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
Cutout: 4-3/8"Ø

COMPATIBLE LOW VOLTAGE HOUSINGS



LV4000BA
 Non-IC Airtight Universal Housing for New Construction
 MR16 120V 50W
Dimensions: 5-1/4"W x 10-1/2"L x 5-1/2"D
Hanger Bars: adj. 14-1/2"~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000ICA
 IC Airtight Housing for New Construction
 MR16 120V 50W
Dimensions: 7-3/4"W x 12-1/4"L x 7"D
Hanger Bars: adj. 14-1/2"~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000RA
 Non-IC Airtight Housing for Remodel
 MR16 120V 50W
Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
Cutout: 4-3/8"Ø