




TM426

RECESSED LIGHTING
4" APERTURE LOW VOLTAGE TRIMS

| | |
|-------------|--|
| Type | |
| Project | |
| Catalog No. | |

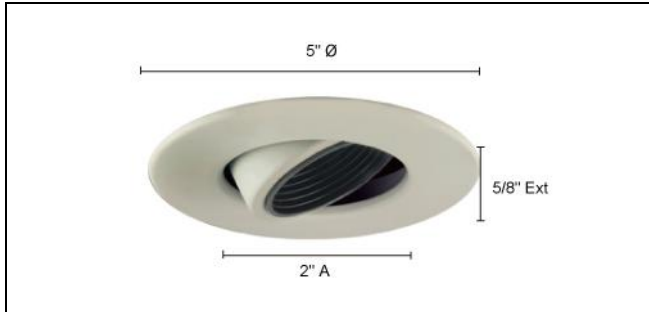

CATALOG INFORMATION

| MODEL | BAFFLE / TRIM FINISH |
|-------|--|
| TM426 | ABAB – Antique Bronze / Antique Bronze |
| | BKBK – Black / Black |
| | BKST – Black / Satin Chrome |
| | WHWH – White / White |

Ordering Instructions
Example:

| MODEL | FINISH |
|-------|--------|
| TM426 | BKST |

DESCRIPTION

- Recessed Lighting – Adjustable Gimbal with Setp Baffle 4" aperture low voltage trim.
- Use MR16 12V 50W Max.
- Ideal for use in ceilings, cabinets and displays.
- 30° adjustment from vertical
- Dimensions: 2"A x 5"Ø x 5/8"Ext
- Listings: UL and C-UL listed.

COMPATIBLE LOW VOLTAGE HOUSINGS



LV4000B
Non-IC Universal Housing for New Construction
MR16 120V 50W
Dimensions: 5-1/4"W x 10-1/2"L x 5-1/2"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000IC
IC Housing for New Construction
MR16 120V 50W
Dimensions: 7-3/4"W x 12-1/4"L x 7"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000R
Non-IC Housing for Remodel
MR16 120V 50W
Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
Cutout: 4-3/8"Ø

COMPATIBLE LOW VOLTAGE HOUSINGS



LV4000BA
Non-IC Airtight Universal Housing for New Construction
MR16 120V 50W
Dimensions: 5-1/4"W x 10-1/2"L x 5-1/2"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000ICA
IC Airtight Housing for New Construction
MR16 120V 50W
Dimensions: 7-3/4"W x 12-1/4"L x 7"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000RA
Non-IC Airtight Housing for Remodel
MR16 120V 50W
Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
Cutout: 4-3/8"Ø