RLF-3308

3" LED ROUND REGRESSED GIMBAL RECESSED DOWNLIGHT



Fixture Type

Project

Notes



LED Regressed Gimbal Downlight series is designed for residential and commercial applications. With integrated adjustable Regressed Gimbal Trim in Black and White finish options, comes with an ultra shallow profile of merely 2-1/2" deep coupled with IC rating, this Slim Downlight is perfect for tight spaces such as soffits, insulated and suspended ceilings as well as installations directly below ceiling joists. The fixture installs flush to ceiling and it includes the Remote Driver and housing is not required for remodel applications. The mounting frame with hanger bars is optional for New Construction applications. The 5-level field selectable color temperature is available.























SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	8 W
LUMENS	600 Lm
EFFICACY	75 Lm/W
CRI	90+
BEAM ANGLE	38°
DIMMING ¹	TRIAC Dimming
CUT-OUT	3-3/8" Ø

¹ Effectively dim down to 10% / See other compatible dimmers on the next page


RATINGS IC, Airtight ENVIRONMENT Indoor - Wet CERTIFICATIONS cETLus, T24 Compliant LUMEN MAINTENANCE 50,000 hours INCLUDES Integrated adjustable regressed gimbal trim in black or white OPTIONAL 3" Mounting Plate WARRANTY2 5 years

PERFORMANCE

CCT selectable via switch on heatsink

COLOR TEMPERATURE ³	LUMEN4	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) ⁵	600 Lm	8 W	75 Lm/W	90+

^{3 &}amp; 4 CCT within +/-10% 5 Switchable CCT



ORDERING INFO

Light Engine with LED



MODEL RLF-3308 CCT / CRI SW5 SW5 - Switchable CCT (27/30/35/40/50) / 90 CRI TRIM FINISH

BK - Black WH - White



OPTIONAL ACCESSORY

(Sold separately)



MODEL
RLH-3334-NC
3" Mounting Plate.
For cutout size: 3-3/8"



Mair Fax

800 527 7796 855 265 5768



219 South 6th Ave City of Industry, CA 91746 Main 800 527 7796 Fax 855 265 5768



support@jescolighting.com Tech Support 855 592 0029

 $^{^{\}rm 2}\,\mbox{See}$ published warranty terms for detailed information

RLF-3308

3" LED ROUND REGRESSED GIMBAL RECESSED DOWNLIGHT




Fixture Type

Project

Notes

TECHNICAL DRAWING

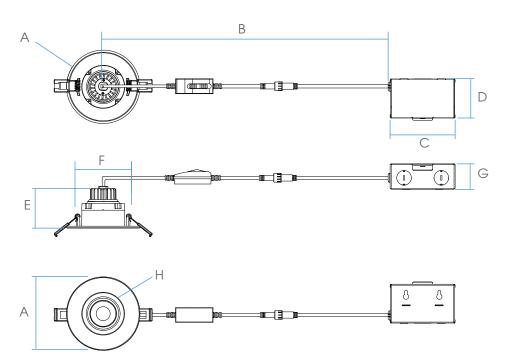

DIMENSIONS				
Α	4-1/4"	110 mm		
В	17''	432 mm		
С	4''	102 mm		
D	2-1/2"	63.5 mm		
Е	2-3/8''	60 mm		
F	3-1/8''	79.5 mm		
G	1-1/2"	38 mm		
н	2-7/8''	73 mm		

COMPATIBLE DIMMERS

COOPER	SIO6P
LEVITON	6621, 6672, IPL06-10Z
LUTRON	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P

