




RLF-35115

3.5" ROUND W/ INTEGRATED REGRESSED FIXED TRIM
LED RECESSED DOWNLIGHT



Fixture Type
Project
Notes




DIMENSIONS

A	4 3/8"	111 mm
B	3 3/4"	95 mm
C	3 1/4"	102 mm

RLF-35115-SW5-WH

LED Regressed Fixed Downlight is designed for residential and commercial applications. It is the fixed version of [RLF-35312](#) (12W Gimbal). With integrated Regressed Trim in Black and White finish options, includes the remote driver. Housing is not required for remodel applications. The mounting frame with hanger bars is optional for New Construction applications. The 5-level field selectable color temperature is available.



SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	15 W
LUMENS	1000 Lm
EFFICACY	67 Lm/W
CRI	90+
BEAM ANGLE	38°
DIMMING ¹	TRIAC/ELV
CUT-OUT	3 3/4" Ø

RATINGS	IC, Airtight
ENVIRONMENT	Indoor - Wet
CERTIFICATIONS	cETLus, T24, JA8 Compliant
LUMEN MAINTENANCE	50,000 hours
INCLUDES	Integrated regressed trim and remote driver
OPTIONAL	Universal mounting plate with hanger bars
WARRANTY ²	5 years


¹ Effectively dim down to 10% / See other compatible dimmers on the next page
² See published warranty terms for detailed information

PERFORMANCE

CCT selectable via switch on heatsink

COLOR TEMPERATURE ³	LUMEN ⁴	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) ⁵	1000 Lm	15 W	67 Lm/W	90+

^{3&4} CCT within +/-10%
⁵ Switchable CCT

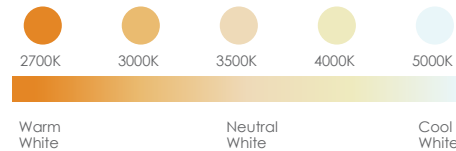

ORDERING INFO

Light Engine with LED



MODEL	CCT / CRI	TRIM FINISH
RLF-35115	SW5	BK - Black WH - White
	SW5 - Switchable CCT (27/30/35/40/50) / 90 CRI	

OPTIONAL ACCESSORY

(Sold separately)



MODEL
RLH-23354-NC-UNI
Universal mounting plate with hanger bars. Cutouts: 2 1/8" Ø, 2 7/8" Ø, 3 3/4" Ø, 5 1/4" Ø.

COMPATIBLE DIMMERS

COOPER	SI06P
LEVITON	6621, 6672, IPL06-10Z
LUTRON	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P