




Designed and Manufactured in the USA.

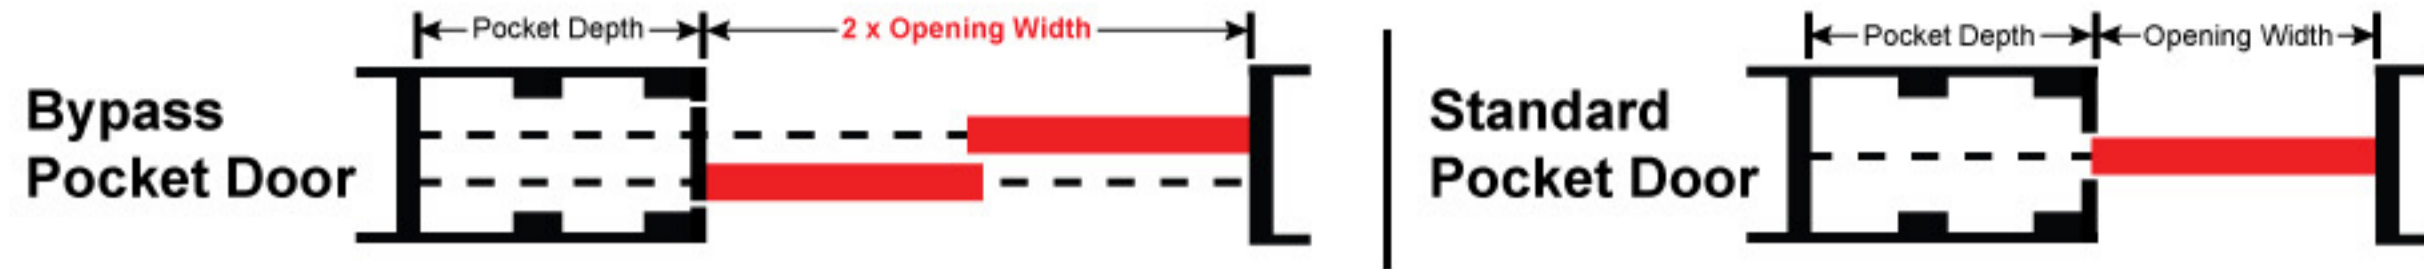

Shallow Pocket Wide Openings:

Ideal for applications where wall structure or obstacles do not allow a deep pocket.

Huge Time Saver:

The factory measured and fabricated 1562 installs quickly into standard 2 x 6 studwalls.


Standard Door Sizes:

The 1562 accepts standard 1-3/8" [35mm] door sizes.

NEW!

All Steel Split Studs

For Rigid Wall Structure
Self-Tapping Screws Included

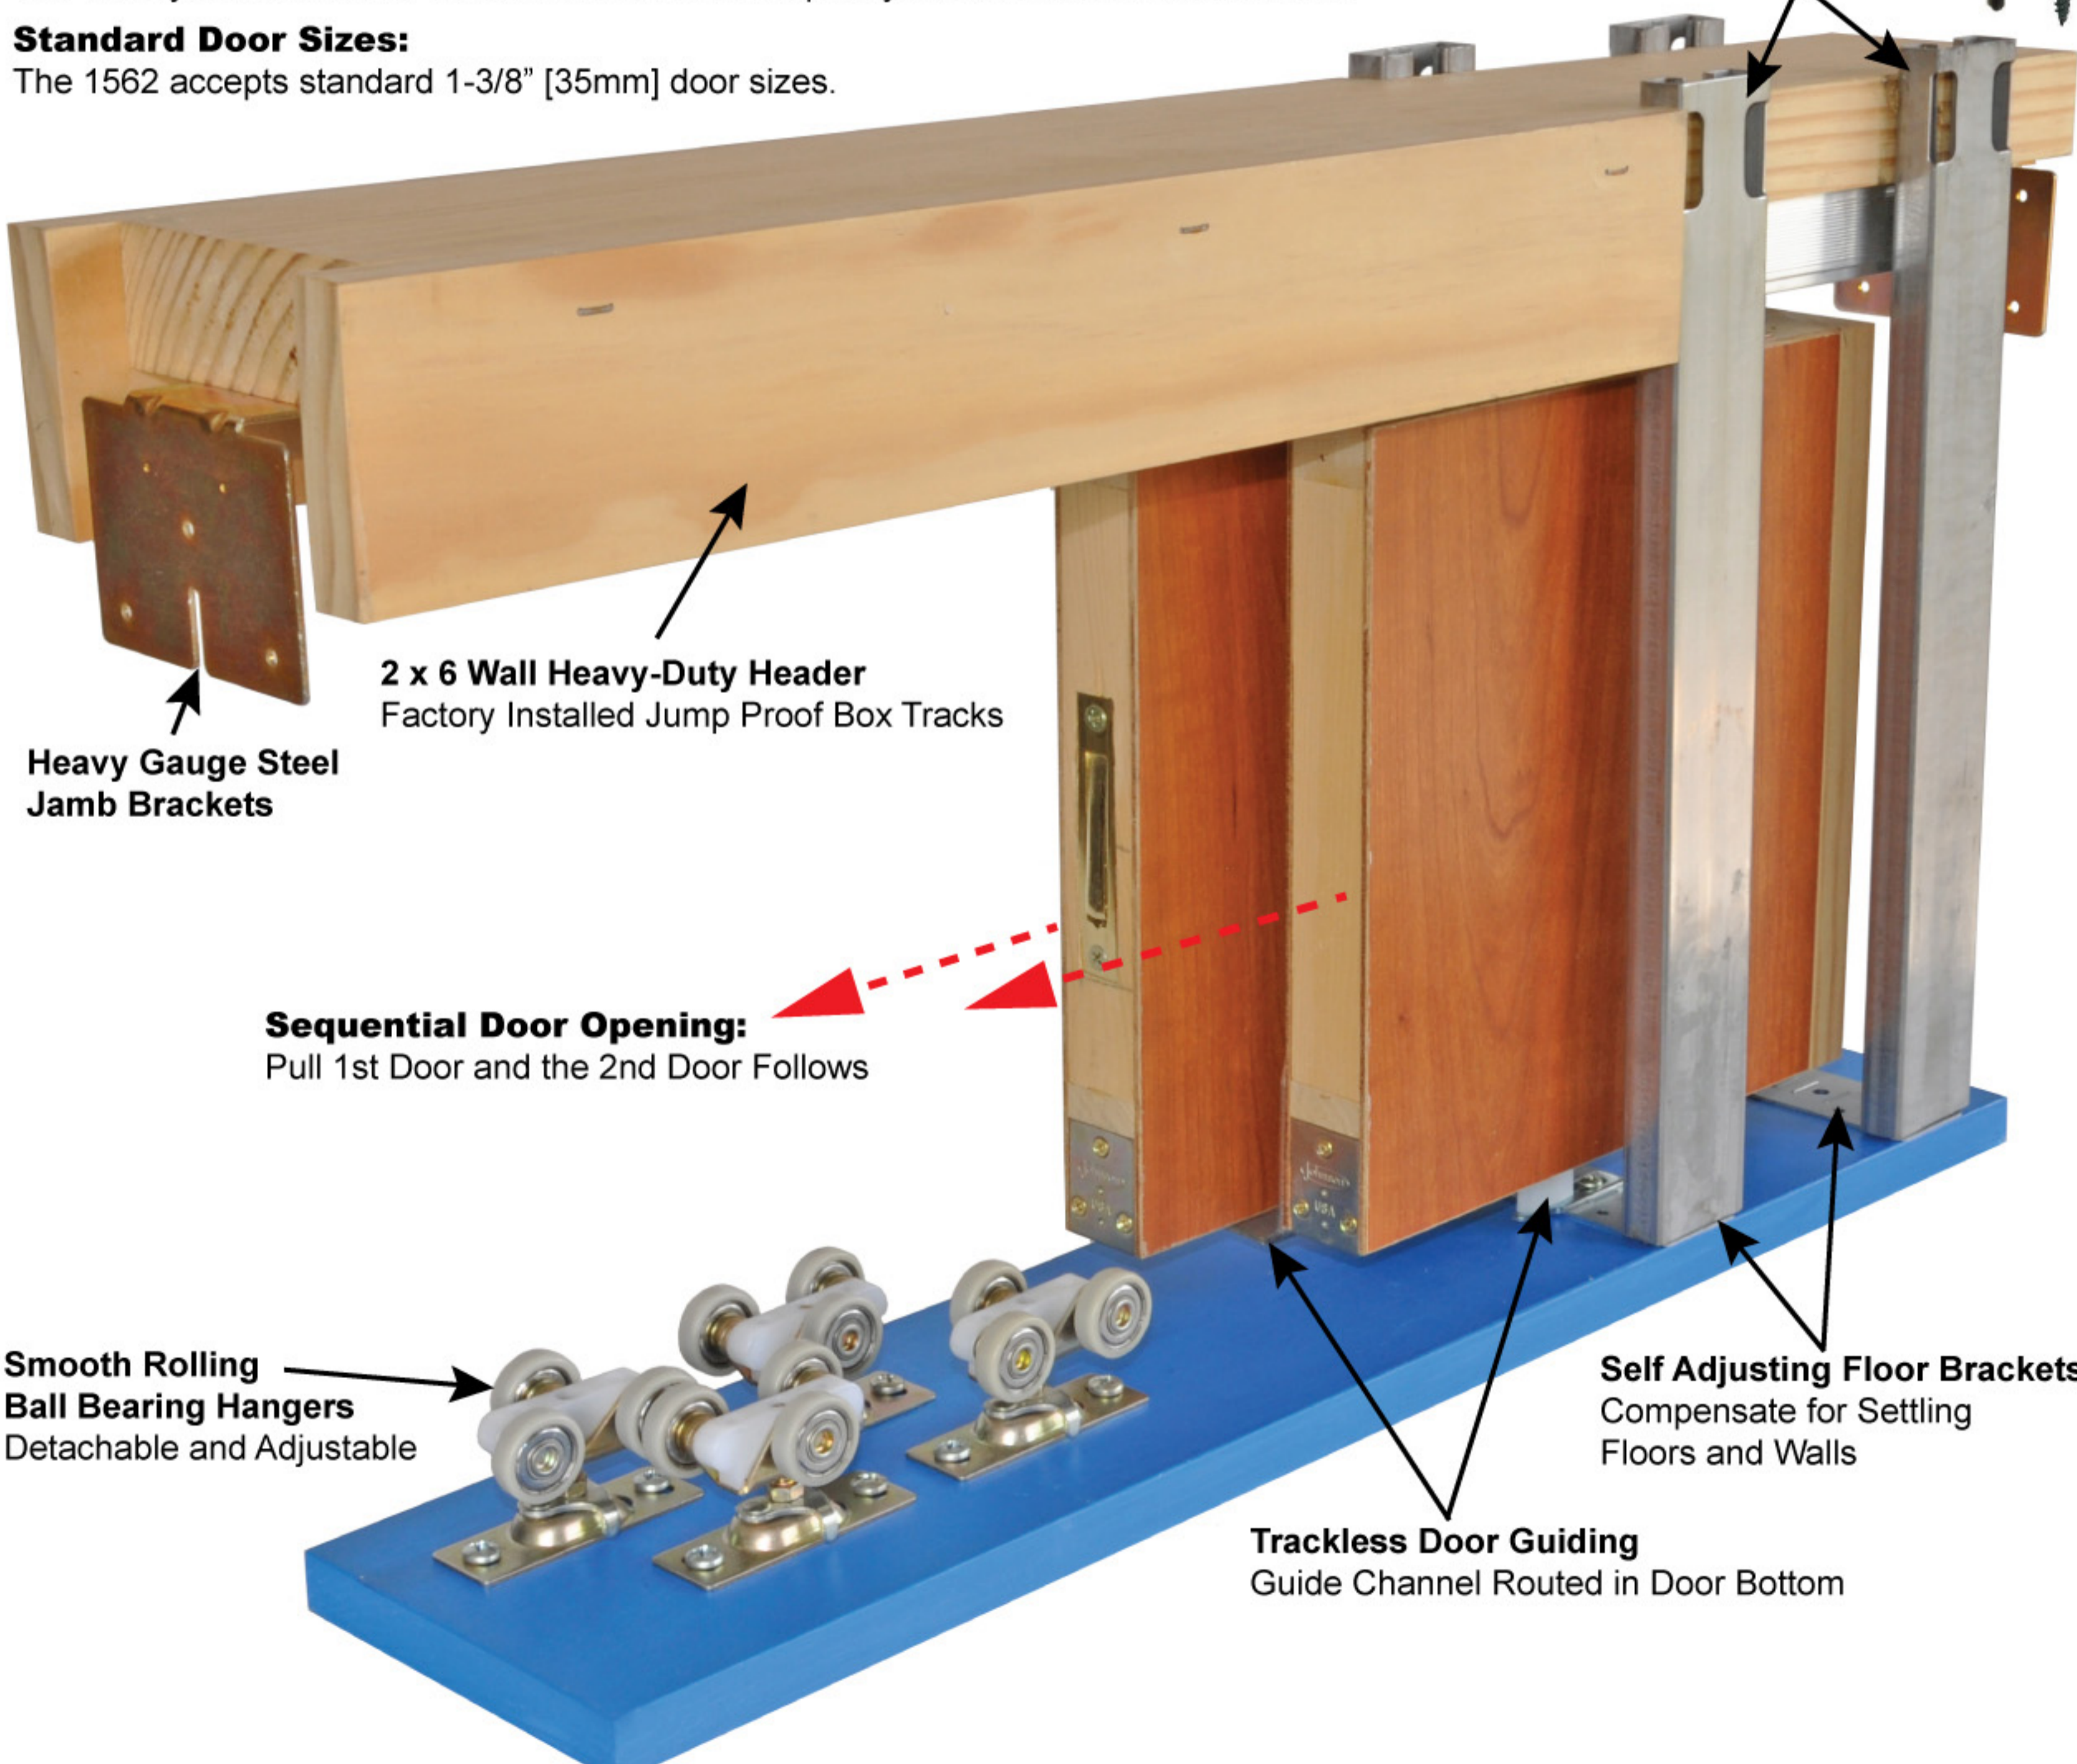

2 x 6 Wall Heavy-Duty Header
Factory Installed Jump Proof Box Tracks

Heavy Gauge Steel Jamb Brackets

Sequential Door Opening:
Pull 1st Door and the 2nd Door Follows

Smooth Rolling Ball Bearing Hangers
Detachable and Adjustable

Self Adjusting Floor Brackets
Compensate for Settling Floors and Walls

Trackless Door Guiding
Guide Channel Routed in Door Bottom