




# Designed and Manufactured in the USA.

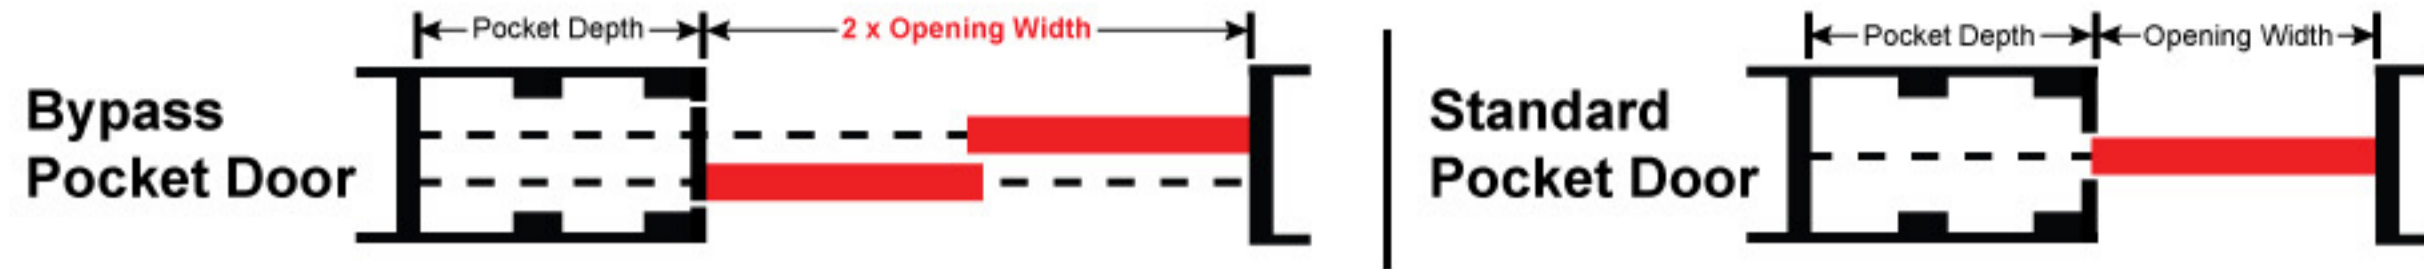

**Shallow Pocket Wide Openings:**

Ideal for applications where wall structure or obstacles do not allow a deep pocket.

**Huge Time Saver:**

The factory measured and fabricated 1562 installs quickly into standard 2 x 6 studwalls.


**Standard Door Sizes:**

The 1562 accepts standard 1-3/8" [35mm] door sizes.

**NEW!**

**All Steel Split Studs**

For Rigid Wall Structure  
Self-Tapping Screws Included

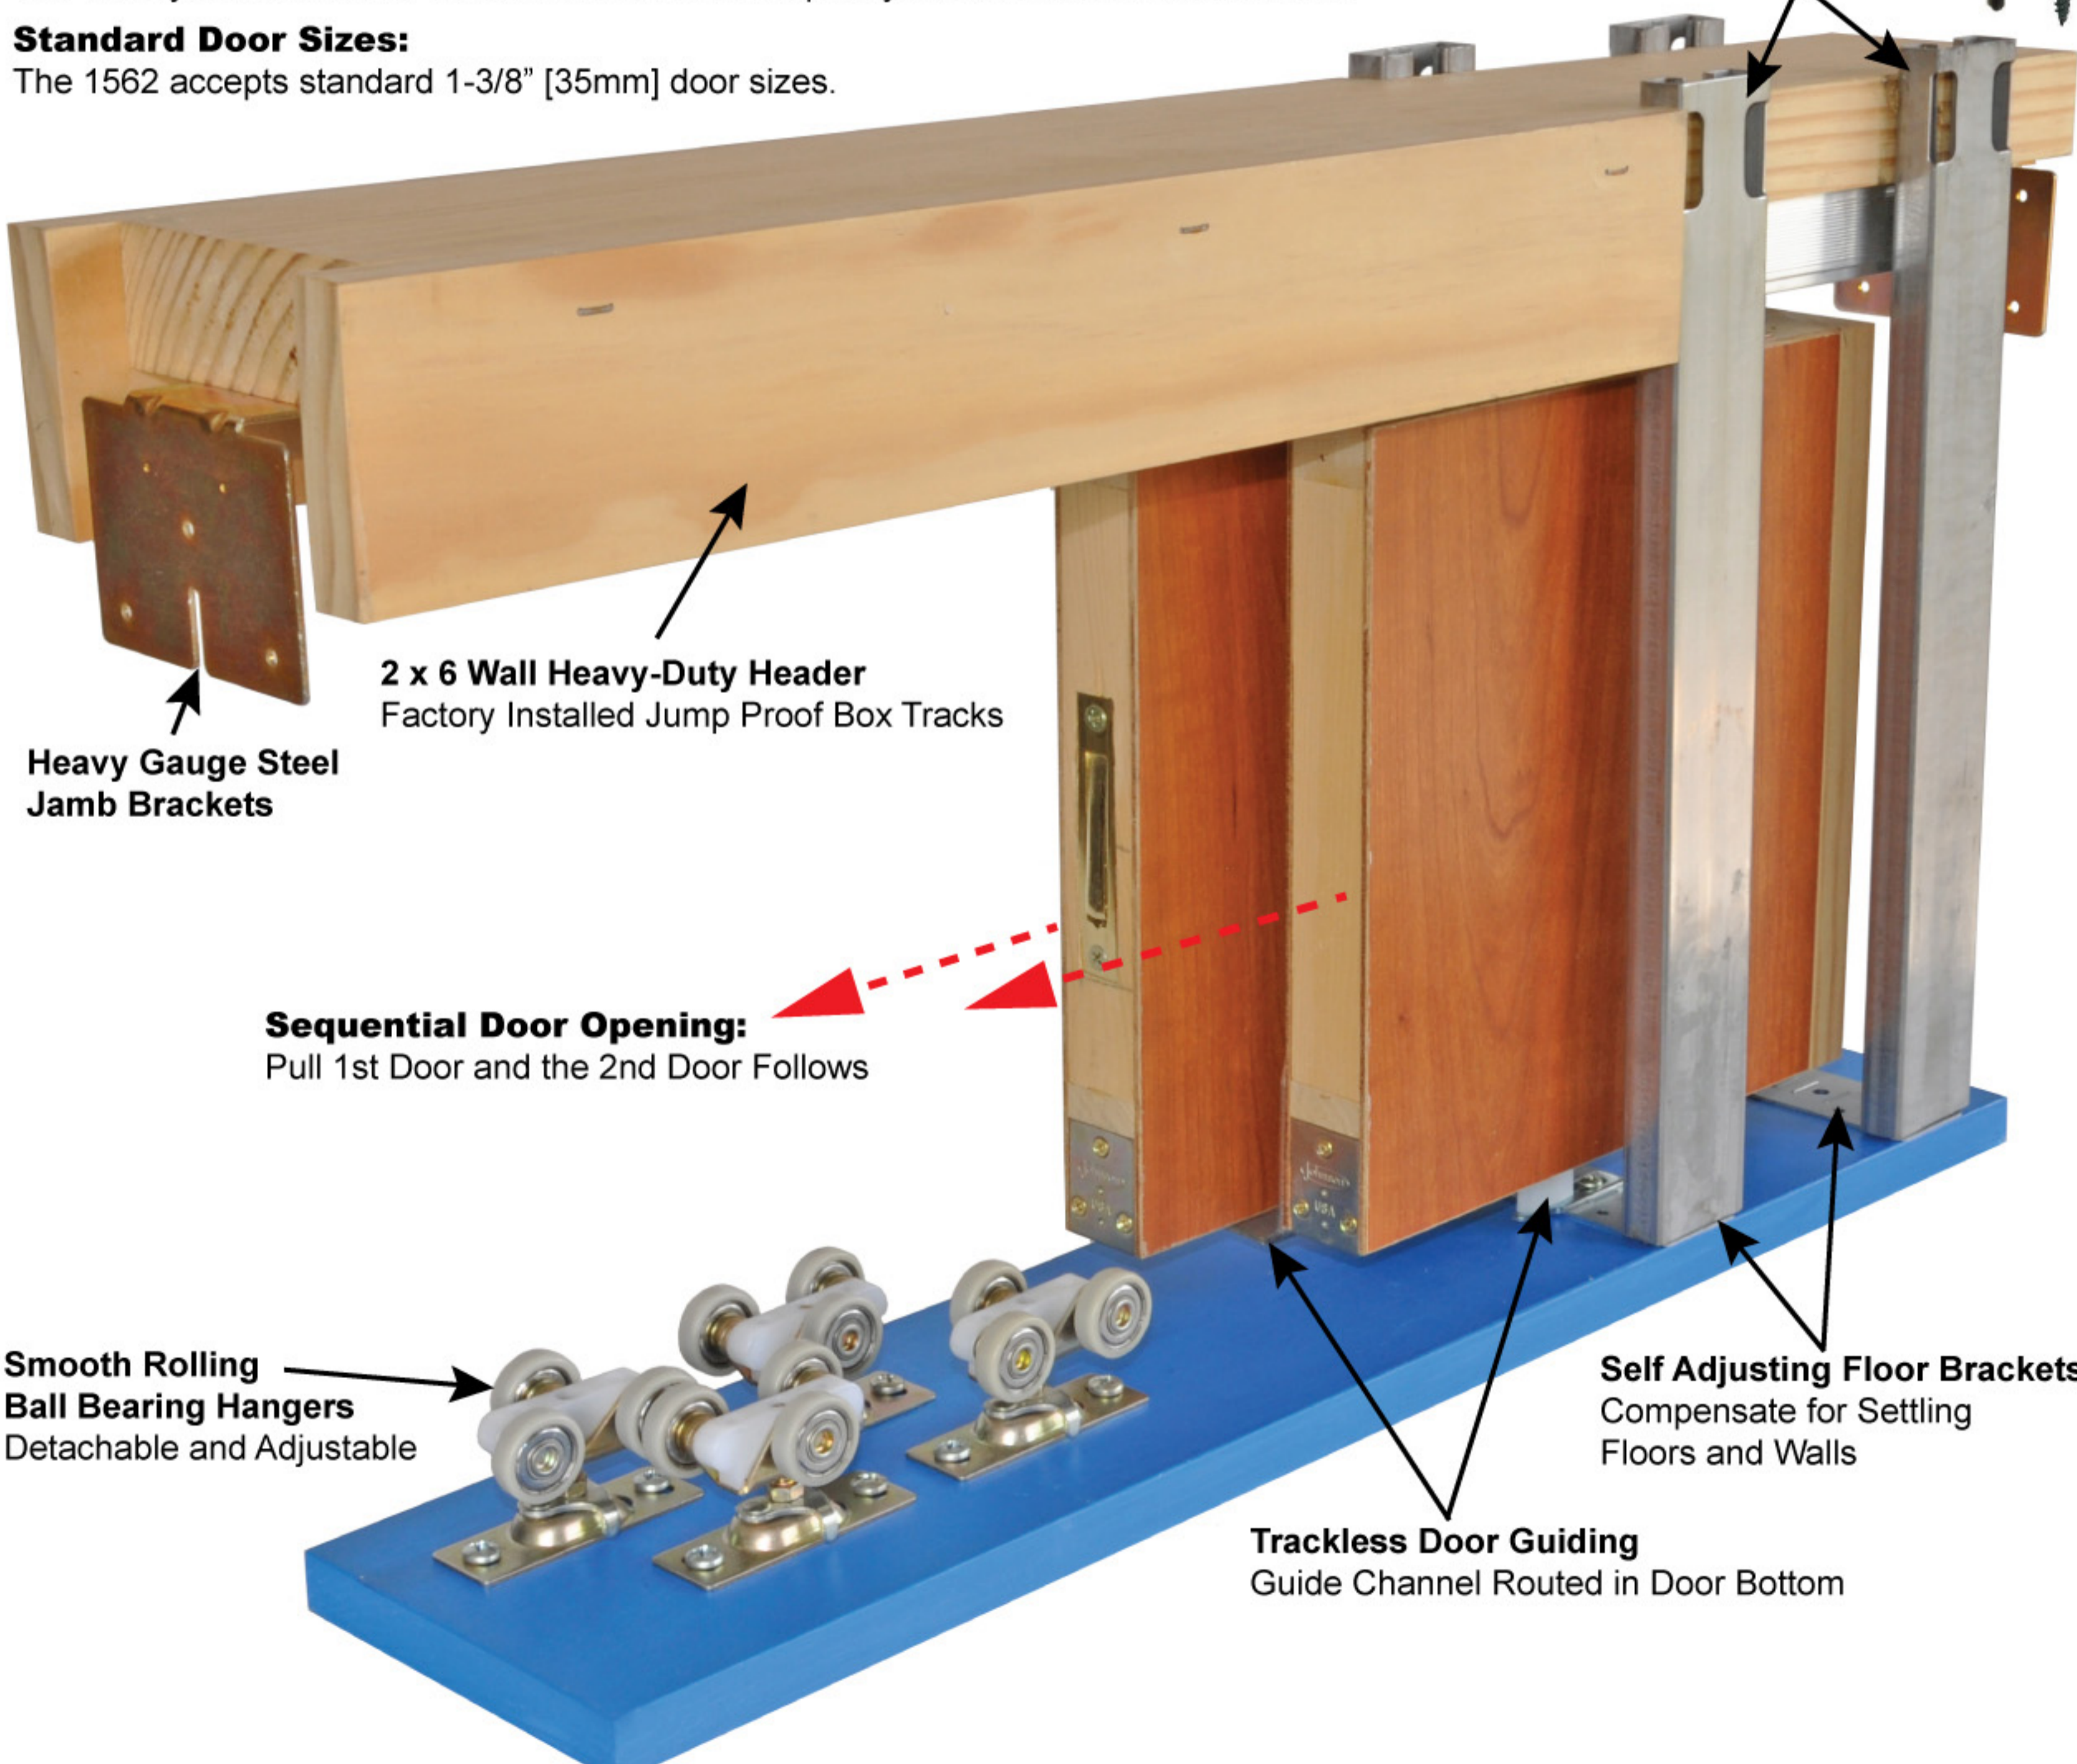

Heavy Gauge Steel Jamb Brackets

2 x 6 Wall Heavy-Duty Header  
Factory Installed Jump Proof Box Tracks

**Sequential Door Opening:**  
Pull 1st Door and the 2nd Door Follows

Smooth Rolling Ball Bearing Hangers  
Detachable and Adjustable

Self Adjusting Floor Brackets  
Compensate for Settling Floors and Walls

Trackless Door Guiding  
Guide Channel Routed in Door Bottom