


36" / 3' - 0" / 914mm Max Door Width.
32" / 2' - 8" / 813mm Min Door Width*.
96" / 8' - 0" / 2438mm Max Door Height.
330lbs. [150kg] Max. Door Weight.

2000SC Series bidirectional soft operating pocket door frames can be cut down to accommodate smaller doors.
 *Minimum door width for bidirectional pocket door soft operation is 32" (813mm). SOFT-Close/Open
 Minimum door width for single direction pocket door soft operation is 24" (609mm). SOFT-Close

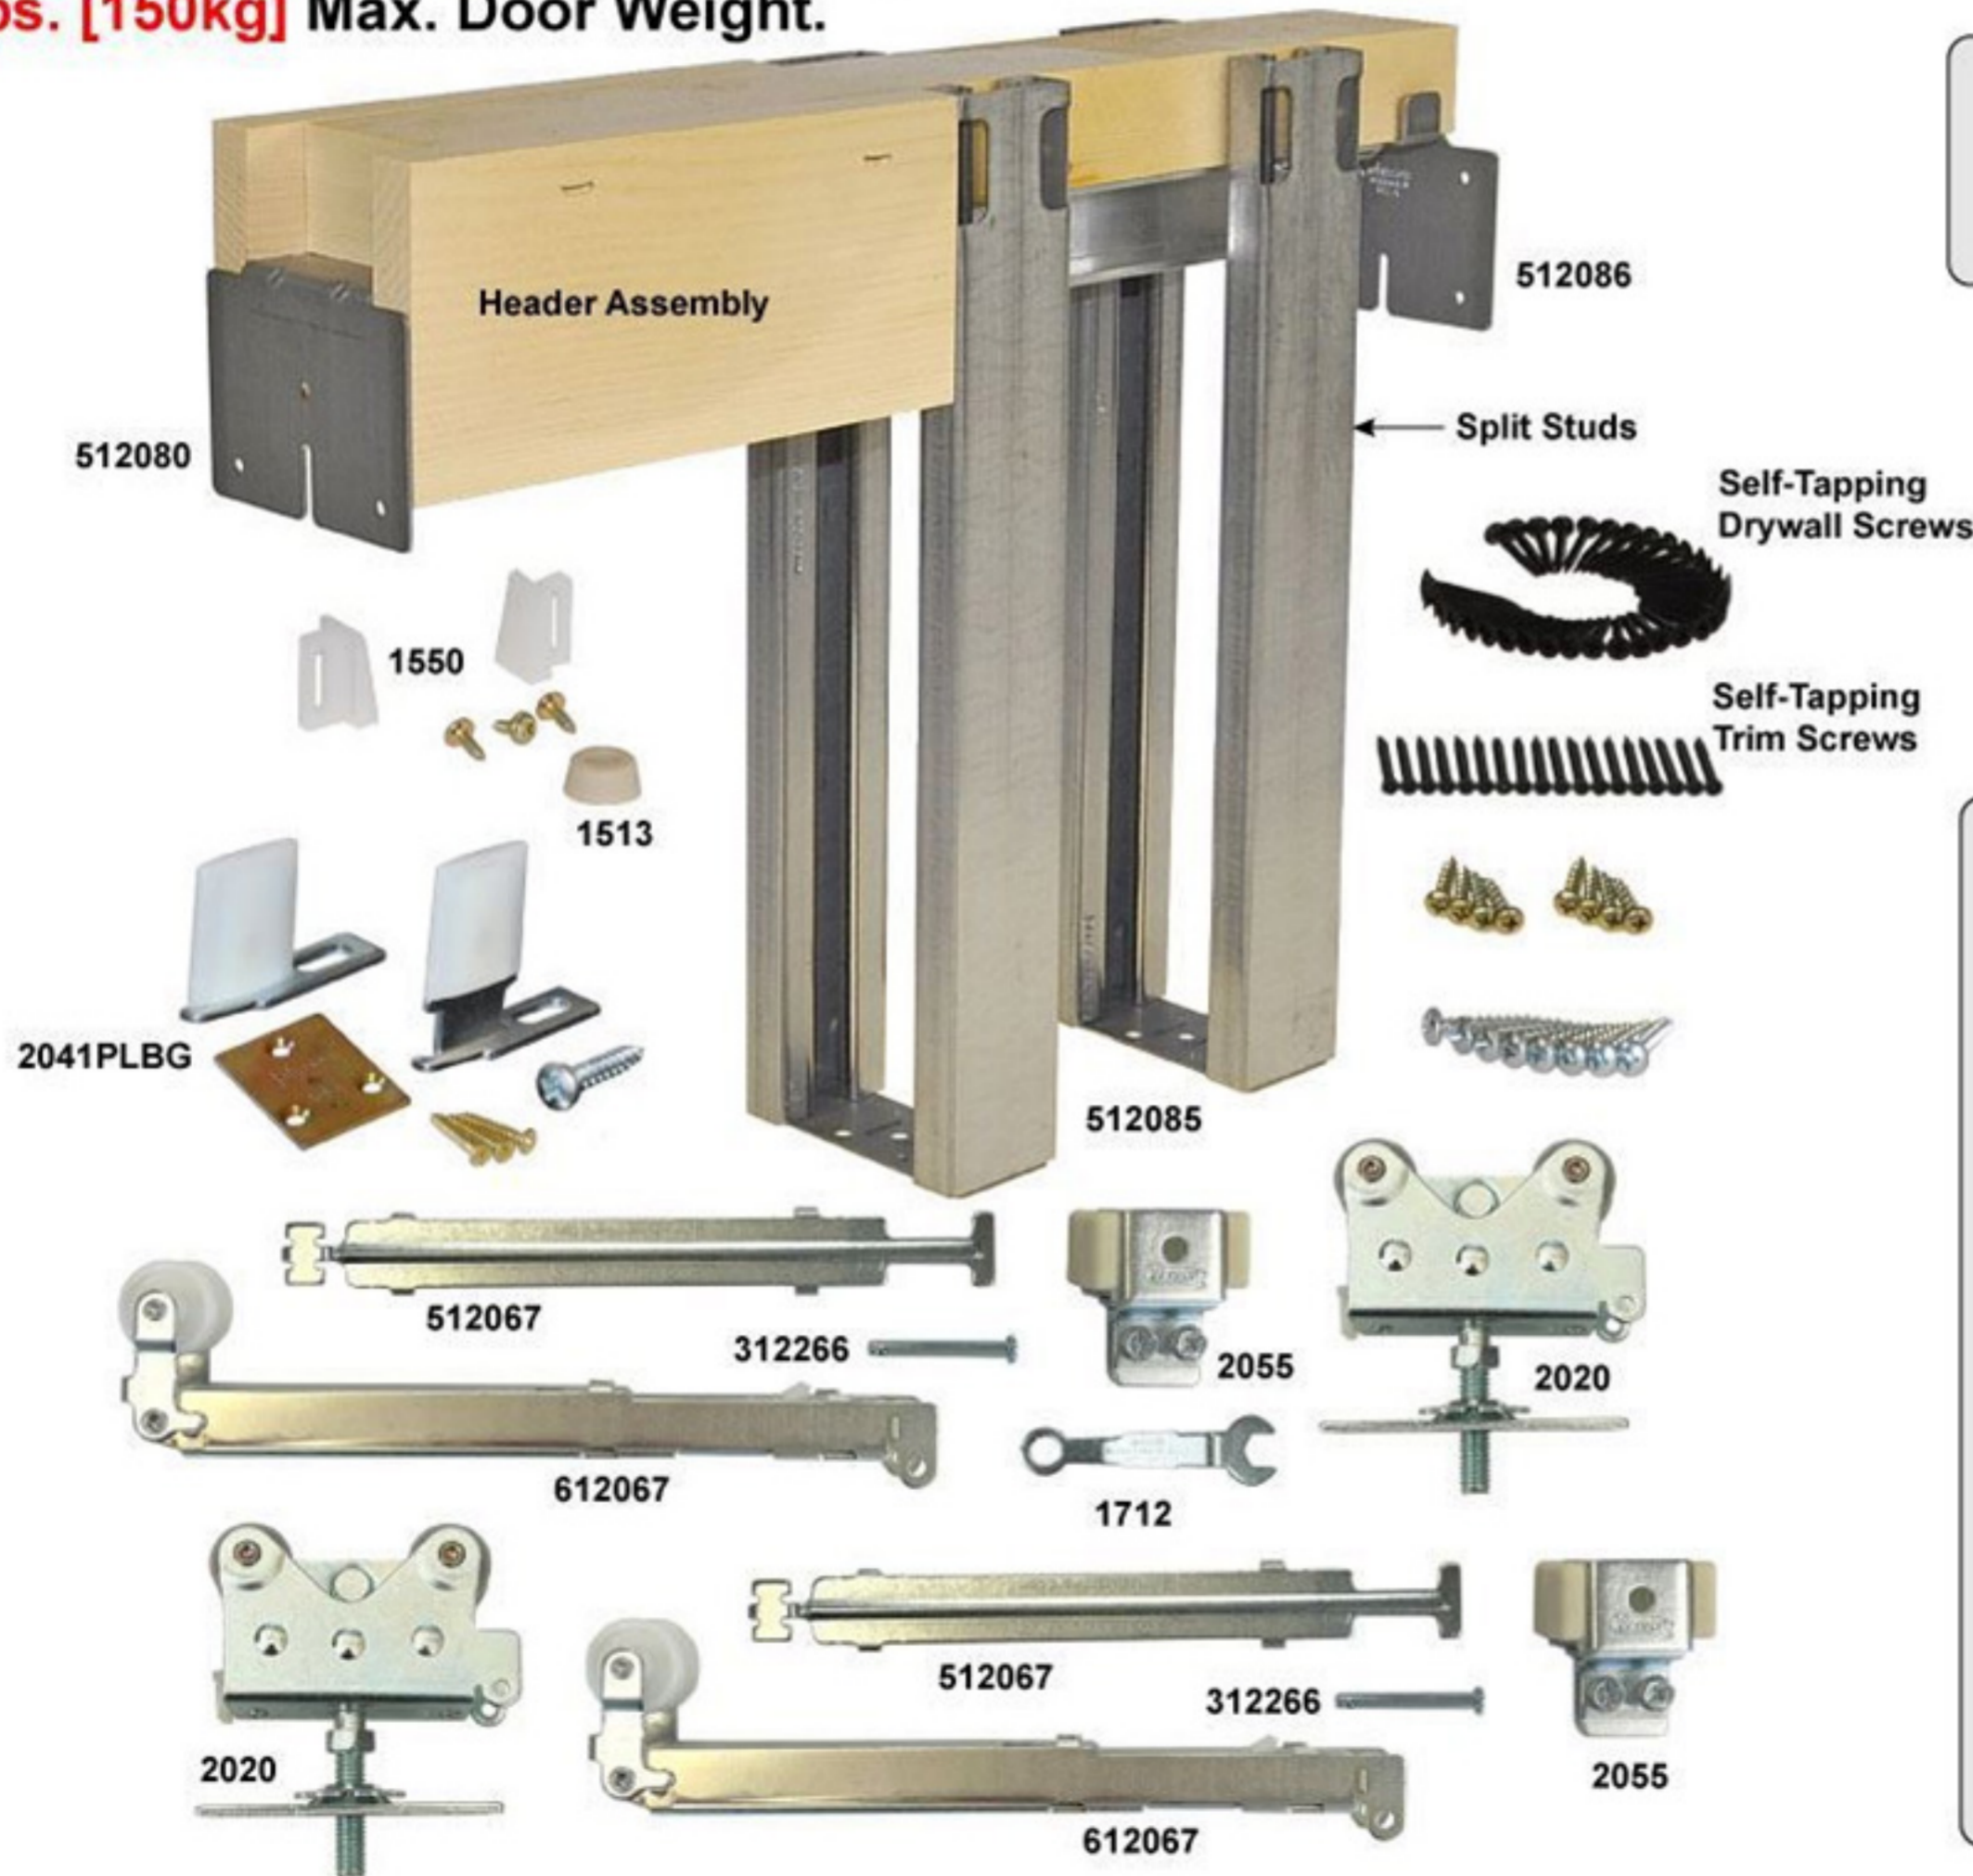

2000SC Frame Part Numbers

- 36" / 3' - 0" / 914mm Max Door Widths**
 203068SC = 36" (3' - 0") X 80" (6' - 8") Door
 203070SC = 36" (3' - 0") X 84" (7' - 0") Door
 203080SC = 36" (3' - 0") X 96" (8' - 0") Door

Converging door applications require Qty. 2 frames and Qty. 1 2050PLBG Converging Door Kit.

Frame pictured here not actual size.
 Header length to vary with door width.
 Split stud spacing to vary with door width.
 Split stud lengths to vary with door height.

2000SC Series Frame Kit Contents

- HEADER (Factory Assembled)**
 1 - 200 Track Length
 1 - 512080 Passage End Jamb Bracket
 1 - 512086 Pocket End Jamb Bracket
-
- 2 - 2020 Ball Bearing Door Hangers
 4 - Split Stud Lengths
 2 - 512085 Split Stud Floor Brackets
 1 - 2041PLBG Hidden Hidden Door Guide
 1 - 1550 Standard Pocket Door Guide
 1 - 1513 Door Bumper
 2 - 2055 Track Stops
 2 - 512067 Actuator Arms
 2 - 312266 Connection Pins
 2 - 612067 Dampeners
 1 - 1712 Adjustment Wrench
 18 - Self-Tapping Drywall Screws
 18 - Self-tapping Trim Screws
 Hardware Mounting Screws