

## WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.  
 WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.  
 INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

## CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.






















To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

## NOTICE & IMPORTANT SAFETY INSTRUCTIONS

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- \* The external flexible cable or cord of this luminaire cannot be replaced
- If the cord is damaged, the luminaire shall be destroyed


## Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	H	Lampbody		1X	O	Short Tube		1X
B	Canopy		1X	I	Wire Nut		3X	P	Socket cup		5X
C	Hanging Loop		1X	J	Mounting Screw		2X	Q	Bottom Band		1X
D	Canopy Nut		1X	K	Bulb		5X	R	Finial		1X
E	Chain		1X	L	Top Band		1X	S	Long glass strand		12X
F	Closable link/ cap		2X	M	Ground Screw		1X	T	Short glass strand		12X
G	Fixture Loop		1X	N	Long Tube		1X	U	Bottom glass strand		6X

# JONATHAN Y

Model#: JYL9003A

Product Dimensions: Ø21.5"X23"H

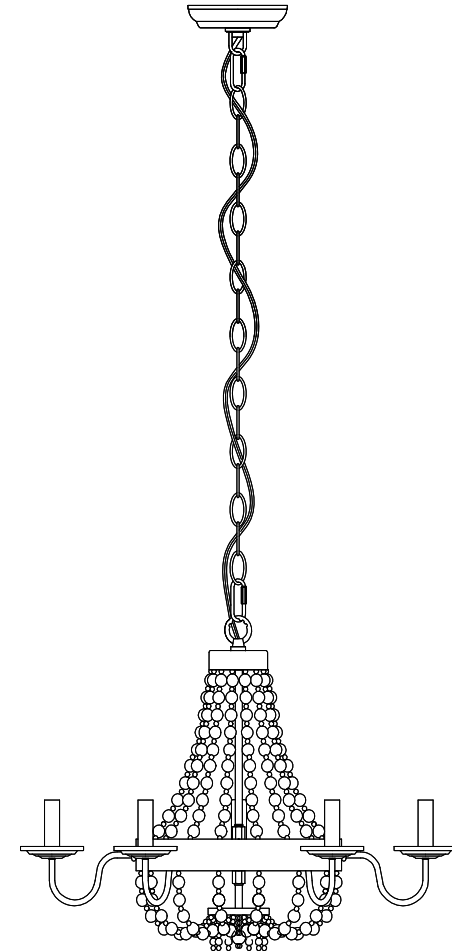


## PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 20 minutes.

1. Insert the fixture wires through the Long Tube(N), rotate the Long Tube(N) clockwise till it is engaged into the top nipple of the Lampbody(H).
2. Insert the fixture wires through the center hole of the Top Band(L) and Fix Loop(G). Secure the Top Band(L) by turning the Fixture Loop(G) clockwise till tight.
3. Screw the Chain(E) to the Hanging Loop(C) and the Fixture Loop(G) with Closable link/cap(F).
4. Attach the Long glass strand(S) onto the Top Band(L) and top frame of the Lampbody(H) as diagram.
5. Insert the Short Tube(O) onto bottom nipple of the Lampbody(H) and center hole of the Bottom Band(Q), secure it with Final(R).
6. Attach the Short glass strand(T) onto the Bottom band(Q) and bottom frame of the Lampbody(H) as diagram.
7. Attach the Bottom glass strand(U) onto the Bottom band(Q) as diagram.
8. Separate the Mounting Plate(A) from the Canopy (B) by unscrewing the Canopy Nut(D) anti-clockwise.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



\*Note: When parallel wire ( SPT I & SPT II ) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. ( See Illustration on left. )

### Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(F) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

9. Fix the Mounting Plate(A) to the junction box with Mounting Screw (J).
10. Attach the Canopy(B) to the junction box and fix it by turning the Canopy Nut (D) clockwise.
11. Place the Socket Cups(P) over the sockets.
12. Insert the bulbs (K) into the Sockets. Be sure to use light bulb(K) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.

**PLEASE USE TYPE "B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE ARE 5 X 4W LED BULBS IN THE BOX.**

**ENJOY YOUR LAMP**

