

WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.















To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE & IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - * The external flexible cable or cord of this luminaire cannot be replaced
- If the cord is damaged, the luminaire shall be destroyed


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	H	Bulb		1X
B	Wire Nut		3X	I	Lamp body		1X
C	Mounting Screw		2X	J	Socket		1X
D	Canopy		1X	K	Strain Relief		1X
E	Canopy Nut		2X	L1/L2	Steel cable holder holder tube		1X
F	Ball Nut		3X	M	Steel Cable		1X
G	Glass Shade		1X	N	Power Cord		1X

JONATHAN Y

Model#: JYL9531A

Product Dimensions: Ø16X18"H

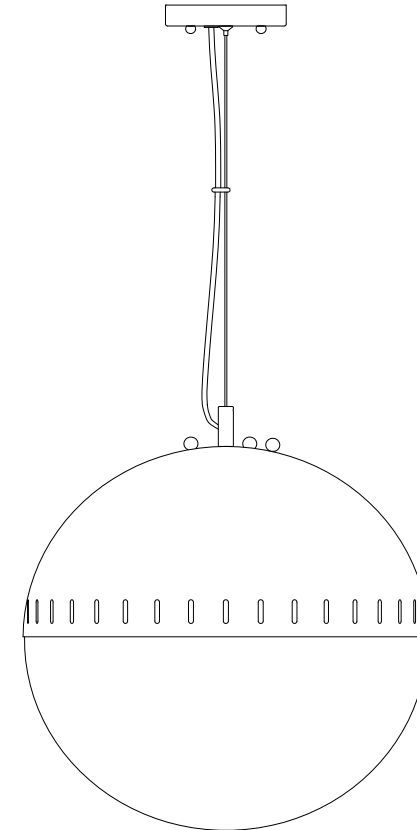

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 20 minutes.

1. Separate the Mounting Plate(A) from the Canopy (D) by unscrewing the Canopy Nut(E) anti-clockwise.
2. Press the Holder Tube(L2) into the Steel Cable Holder(L1), then adjust the length of the Steel Cable (M) as your desired length.
3. Adjust the length of the Power Cord(N) accordingly(longer than the steel cable) by inserting into the Canopy(D) then fix it by inserting through the Strain Relief(K) against the Canopy(D).
4. Insert the bulb (H) into the Socket(J). Be sure to use light bulb(H) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulb.

**PLEASE USE TYPE "A" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT
THERE IS 1 X 9W LED BULB IN THE BOX.**

5. Place the metal shade of the Lamp Body(I) onto the Glass Shade(G), making sure the threaded portions of the Glass Shade(G) extending through the 3 holes on the metal shade. And fix it in place with Ball Nuts (F).
6. Attach the Mounting Plate (A) to the ceiling junction box and secure it by tightening 2 Mounting Screws (C) with a screwdriver until secure.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

7. Attach the Canopy(D) to the junction box and fix it by turning the Canopy Nut (E) clockwise.

