

WARNING

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE & IMPORTANT SAFETY INSTRUCTIONS

* Please make sure that you have all parts indicated before you begin assembly of this item


















* This item should be assembled on a soft surface to prevent scratching the finish during assembly

* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation

*The external flexible cable or cord of this luminaire cannot be replaced

If the cord is damaged, the luminaire shall be destroyed


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	J	Fixture Loop		1X
B	Mounting Plate		1X	K	Lamp Body		1X
C	Ground Screw		1X	L	Thread Tube		1X
D	Mounting Screw		2X	M	Diffuser		1X
E	Hanging Loop		1X	N	Bulb		3X
F	Closable link/cap		2X	O	Washer		1X
G	Canopy		1X	P	Finial		1X
H	Canopy Nut		1X	Q	Socket Assembly		1X
I	Chain		1X				

JONATHAN Y

Model#: JYL1315A

Product Dimensions: Ø19"*24-83"H

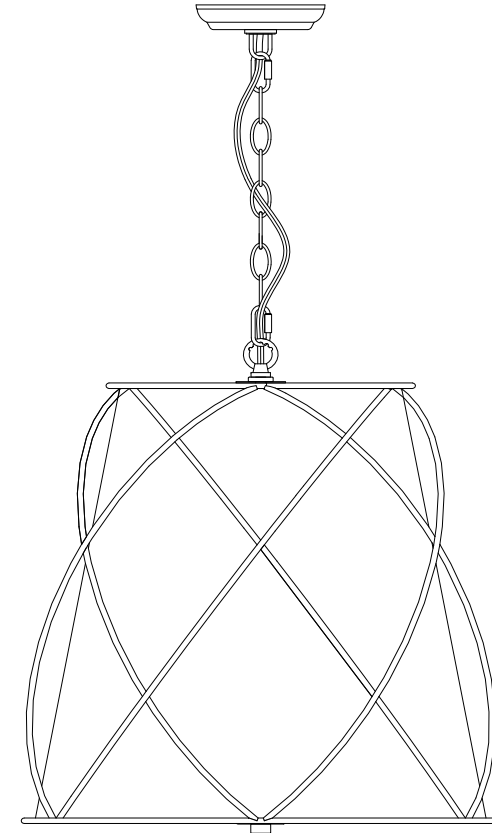


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 30 minutes.

1. Insert the fixture wires through the central hole of the Lamp Body (K) and Fixture Loop(J). Rotate the Fixture Loop(J) clockwise till tight.
2. Screw the Chain (I) to the Hanging Loop (E) and the Fixture Loop (J) with Closable link/cap (F).
3. Unscrew the Canopy Nut (H) from the Hanging Loop(E).
4. Insert the fixture wires through the Chain(I),Hanging Loop(E), Canopy (G) and Mounting Plate (B).

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

5. Fix the Mounting Plate(B) to the junction box with Mounting Screw (D).
6. Attach the Canopy(G) to the Mounting Plate (B) and fix it by turning the Canopy Nut (H) clockwise.
7. Insert the bulb (N) into the Socket as diagram. Be sure to use light bulb(N) with wattage no greater than specified on this fixture. Make sure that electrical current is turned off before changing bulbs.

PLEASE USE TYPE "A" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE ARE 3 X 9W A19 LED BULB IN THE BOX.

8. Insert the Threaded Tube (L) into the bottom of the socket assembly as diagram. Place the Diffuser (M) onto the bottom of the Lamp Body (K), making sure the nippler of the Threaded Tube (L) extending through the Diffuser (M), place Washer(O) and turn the Finial (P) clockwise till tight.

ENJOY YOUR LAMP

