

**JUNO****4" BASICS SERIES™  
LED RETROFIT BAFFLE TRIM**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

DOWNLIGHT RETROFIT FOR STANDARD 4"  
RECESSED HOUSINGS**4RLD G3 06LM****PRODUCT DESCRIPTION**

Energy efficient LED retrofit module fits into standard 4" IC or non-IC recessed housings • Replaces 50W incandescent lamp, producing over 650 lumens • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • LED retrofit module is designed to provide 36,000 hours of life • 5 year warranty

**PRODUCT SPECIFICATIONS**

**LED Retrofit Downlight Trim** Cast aluminum trim with white baffle and flange. All-in-one design where LED light engine mounts directly to trim for ease of installation into existing 4" recessed housings with medium base sockets • Provided with push-in friction springs.

**LED Light Engine** LEDs mounted directly to aluminum housing designed to provide superior thermal management and ensure long life • 2700K, 3000K, and 3500K LED color temperature • 90 CRI minimum • Accommodates 120 volts AC at 60Hz • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • For a list of compatible dimmers, see [JUNORETROBASICS-DIM](#).

**Electrical Connections** Trim features quick connect plug installed as standard for installation into IC1 LEDT24 and IC1R LEDT24 housings with mating connector • Trim ships with a medium base socket adapter whip for installation into 4" incandescent housings with medium base sockets.

**Trim** Cast aluminum baffle trim with white finish • Diffusing lens conceals the LEDs from direct view and provides uniform aperture luminance.

**Life** Rated for 36,000 hours at 70% lumen maintenance.

**Labels** ENERGY STAR® Certified • Certified to the high efficacy requirements of California T24 • UL and cUL classified for use with most standard UL listed 4" recessed incandescent housings and Juno IC1 LEDT24 and IC1R LEDT24; see below for specific compatibility requirements • Damp location • Suitable for wet locations (indoor covered ceilings).

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

**INSTALLATION**

The LED retrofit baffle trim is provided with push-in friction springs as standard.

**COMPATIBLE HOUSINGS**

The 4RLD retrofit baffle trim is compatible with most 4" recessed housings measuring at least 4" high with an inside diameter between 4" and 4-1/2".

**Compatible housings include, but not limited to:**

**Juno housings:** IC1 and TC1 Series

**Juno quick-connect LED housings:** [IC1 LEDT24](#) and [IC1R LEDT24](#)


**VuLite® housings:** V4IC and V4TC Series

**Lithonia® housings:** L3 Series

**Halo® housings:** H99 Series

**Thomas® housings:** PS4 Series

**Capri® housings:** P4 and R4 Series

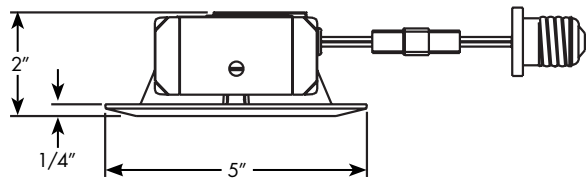**DIMENSIONS****PERFORMANCE DATA**

	27K	30K	35K
Input Voltage	120V	120V	120V
Input Power Typical	10W	10W	10W
Frequency	60Hz	60Hz	60Hz
EMI/RFI	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)
Minimum starting temp	-30°C (-22°F)	-30°C (-22°F)	-30°C (-22°F)
CRI	90 min.	90 min.	90 min.
CCT	2700K	3000K	3500K

**ORDERING INFORMATION**

Ordering Example: 4RLD G3 06LM 27K 90CRI 120 FRPC WWH

Trim Series	Generation	Lumens	Color Temperature	Color Rendering Index	Voltage	Driver	Finish
4RLD 4" Juno Basics Retrofit Downlight	G3 Generation 3	06LM 600 Nominal Lumens	27K 2700K 30K 3000K 35K 3500K	90CRI 90+ CRI	120 120V	FRPC Forward/Reverse Phase Cut	WWH White, White Trim Ring


# 4" BASICS SERIES™ LED RETROFIT BAFFLE TRIM

DOWNLIGHT RETROFIT FOR STANDARD 4"  
RECESSED HOUSINGS  
**4RLD G3 06LM**


## PHOTOMETRICS

**Distribution Curve      Distribution Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire**

**4RLD G3 06LM 27K**, 2700K LEDs, input watts: 10, delivered lumens: 678, LM/W = 68, test no. PT10161301R, tested in accordance to IESNA LM-79.

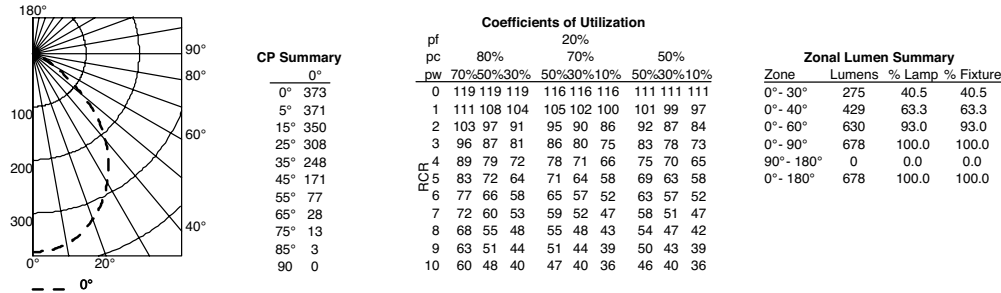

**4RLD G3 06LM 30K**, 3000K LEDs, input watts: 10, delivered lumens: 708, LM/W = 71, test no. PT10161301R, tested in accordance to IESNA LM-79.

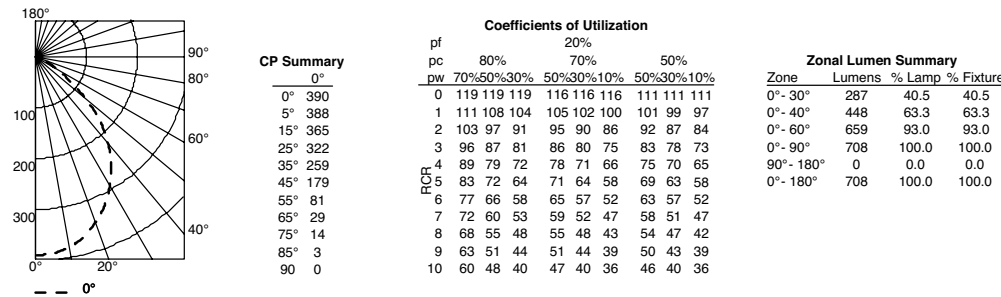

**4RLD G3 06LM 35K**, 3500K LEDs, input watts: 10, delivered lumens: 740, LM/W = 74, test no. PT10161301R, tested in accordance to IESNA LM-79.

