



| |
|----------------|
| Catalog Number |
| Notes |
| Type |

Contractor Select™

WF4C/WF6C


4" and 6" LED Tunable White Wafer Downlight

The JunoConnect Wafer™ with Tunable White CCT's is the perfect way to get started with a Smart Home Lighting solution. Once commissioned, it can be controlled through an app or voice commands. Connect the JunoConnect™ directly to any Apple or Android phone using Bluetooth or Zigbee. Commission through the free SmartThings app or Alexa and Google voice assistant apps. Once installed, controlling the lighting from your mobile device is simple and easy to customize lighting from on/off, fine-tuning the color temperatures (2700K to 5000K), dimming to set the mood, and grouping to control an entire area's lighting at once.



FEATURES:

- Low profile integrated LED downlight, no housing required
- Easy to handle compact size
- Installs into wood joists or suspended ceilings with new construction pan
- IC rated for direct contact with insulation
- Dimmable to 1%

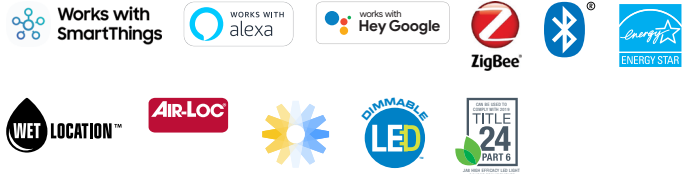

| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Finish | Pallet qty. |
|--------------------|--------------|---------------------------------|------------------|--------|-------------|--------------------------------|-----|---------|--------|-------------|
| WF4C RD TUWH MW M6 | 194994450634 | 4" JunoConnect Wafer™ Downlight | 65W Incandescent | 850 | 10.6W | Tunable White (2700K to 5000K) | 90 | 120V | White | 576 |
| WF6C RD TUWH MW M6 | 194994450641 | 6" JunoConnect Wafer™ Downlight | 75W Incandescent | 1000 | 13.5W | Tunable White (2700K to 5000K) | 90 | 120V | White | 540 |



Specifications

HOUSING:

Polycarbonate injection molded outer frame, with steel back plate. Non-conductive dead-front trim design suitable for a wide range of applications and codes requiring a non-conductive lens • FT4 3-pin plenum rated cable connector to connect from module to remote driver box • Steel spring clip for easy installation. 4" or 6" cut out template is provided to ensure a correct sized hole is cut into ceiling for proper installation of the trim. Size of hole should not exceed 4 1/4 inches (WF4C) or 6 1/4 inches (WF6C) for this product • Can be installed from 3/8" to 1 1/2" ceiling thickness • Can be removed from below the ceiling for service or replacement.

LED LIGHT ENGINE:

LEDs are integrated to one piece high purity aluminum, thermally conductive housing to provide uninterrupted heat transfer to ensure long life of the LED

- Tunable color temperature from 2700K to 5000K • 90 CRI minimum
- Dimmable to 1%

DRIVER:

Dedicated 120 volt replaceable driver • Accommodates 120 volts AC at 50/60Hz • Isolated driver integrated inside steel remote box with four 7/8" knockouts with slots for pryout • Suitable for pulling wires with the 12 cubic-inch wiring compartment to accommodate up to (6) 14 gauge insulated conductors; making the Wafer LED Downlights much easier to wire in 2in/2out (plus ground) daisy-chain applications and contractor friendly • Designed to provide 50,000 hours of life • 3-year warranty on LED components.

LIFE:

Rated for 50,000 hours at 70% lumen maintenance.

LABELS:

CSA certified to US and Canadian safety standards • ENERGY STAR® certified product • Suitable for wet location • Air-Loc certified in accordance with ASTM E283-2004 • NOM Certified • Can be used to comply with California Title 24 Part 6 High Efficacy LED light Source Requirements.

TESTING:

All reports are based on published industry procedures; field performance may differ from laboratory performance.

WARRANTY:

3-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

