




INSTALLATION INSTRUCTIONS




P21510




P21511




P21512




P21513




P21514



P21540



P21671



P21676

INSTALLATION INSTRUCTIONS

THANK YOU FOR CHOOSING KALLISTA


We appreciate your commitment to KALLISTA quality products. Please take a moment to review this manual before you install your KALLISTA product. If you encounter any installation or performance problems, please do not hesitate to contact us at the phone number listed at the bottom of the page.

IMPORTANT INFORMATION


NOTICE: Choose an automatic compensating valve with the appropriate minimum flow rating, to assure your valve will provide safety at the lowest flow rates. For a showerhead that has a maximum flow rate of 2.5 gpm (9.5 L/min) and a minimum flow rate of 2.0 gpm (7.6 L/min), use with an automatic compensating valve rated at 2.0 gpm (7.6 L/min) or less.

- Prior to installation, unpack the new showerhead and inspect it for damage. Return the showerhead to its protective carton until you are ready to install it.
- Observe all local plumbing and building codes.
- Shut off the main water supply.
- The appearance of your product may differ from what is shown in these instructions, however, the installation procedure is the same.
- KALLISTA reserves the right to make revisions in the design of products without notice, as specified in the Price Book.


TOOLS AND MATERIALS




Small
Flat-blade
Screwdriver



Adjustable
Wrench



Sealant
Tape




Silicone
Sealant



Rags

INSTALLATION INSTRUCTIONS

INSTALL THE SHOWERHEAD

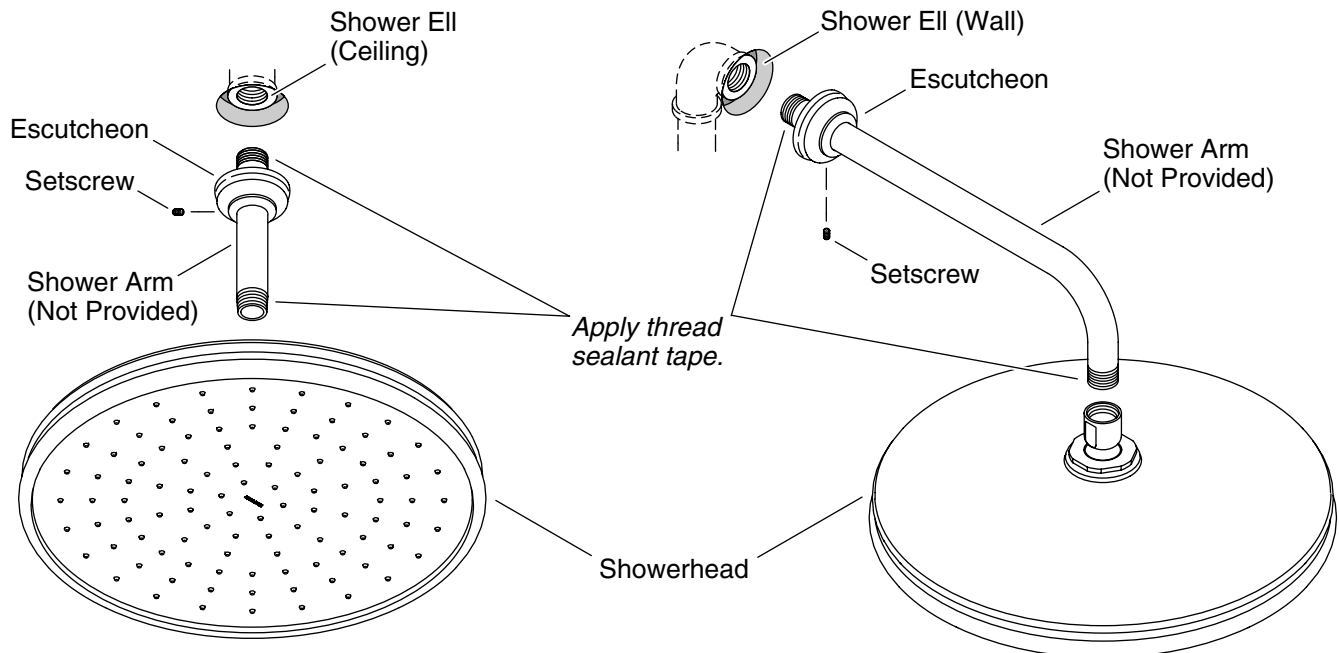

CAUTION: Risk of product damage. To avoid plugging the showerhead spray outlets, use thread sealant tape on the shower arm threads. Do not use thread sealant compound (pipe dope).

NOTE: The shower arm is not provided.

- Slide the escutcheon onto the end of the shower arm that will be closest to the wall/ceiling.
- Install the shower arm onto the shower ell according to the shower arm manufacturer's instructions.
- With the showerhead off, turn on the water to flush out the system.
- Apply thread sealant tape to the threads of the exposed end of the shower arm.
- Handtighten the showerhead to the shower arm.
- Use a clean adjustable wrench to tighten the showerhead onto the shower arm.
- Check for proper operation.
- Check all connections for leaks. Repair as needed.
- If desired, apply a bead of clear silicone sealant to the back perimeter of the escutcheon.
- Carefully slide the escutcheon to the finished wall/ceiling; be careful not to scratch the finish.
- Using a small flat-blade screwdriver, tighten the setscrew to secure the escutcheon to the shower arm.
- Remove any excess sealant.