Pléo Wall-Mount Toilet


FEATURES

- One-piece, wall-mount toilet
- Compact elongated bowl offers comfort while occupying the same space as a round-front bowl
- Skirted bowl allows for easy cleaning and eliminates potential debris build-up
- Adjustable durable steel frame carrier allows bowl to be positioned 15-3/8" (391 mm) to 28-1/2" (724 mm) from floor
- Dual-flush actuator offers a choice of 1.0 gpf (3.8 lpf) or 1.6 gpf (6.1 lpf)
- Actuator with glass plate can be removed for easy access to inner tank

- CODES/STANDARDS APPLICABLE
- P70361, P70362, P70364,
- ASME A112.19.2/CSA B45.1
- ASME A112.19.14
- EPA WaterSense®
- ASMF A112.6.2

Combination P70360



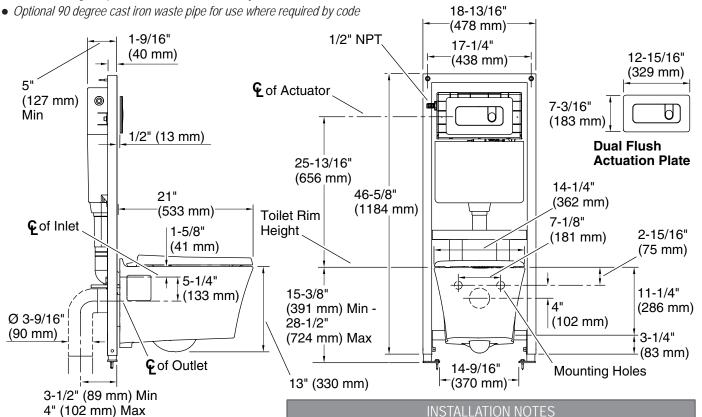

PRODUCT INFORMATION Gallons per flush 1.6 gpf (6.1 L) or 1.0 gpf (3.8 L) Passageway 3" (76 mm) Water area 4-1/2" (114 mm) x 5-1/2" (140 mm) Seat post hole centers 5-1/2" (140 mm)

Install this product according to the installation guide.

Installation requires 2x6 framing.

The recommended install height from the finished floor to the toilet rim is 16-1/8" (410 mm).

In-wall tank and carrier system install in wall opening

5-1/2"(140 mm) x 19" (483 mm) x 50" (1270 mm) minimum.

Refer to manufacturer and local codes for flush valve requirements

SPECIFIED MODEL Model Description **Finishes** P70360-00 Pléo Wall-Mount Combo, Bowl and Carrier System O Stucco White ☐ 96 Linen P70361-00 Pléo Wall-Mount Bowl O Stucco White ☐ 96 Linen P70362-00 In-Wall Tank and Carrier System ■ NA Required Accessory ☐ CP Polished Chrome ■ AD Nickel Silver ☐ AG Brushed Nickel P70364-00 **Dual-Flush Wall-Mount Toilet Actuator** ☐ LB Bronze ■ GN Gunmetal ■ W7 Black Nickel Recommended Accessory P70363-00 Modern Toilet Seat with Slow-Close, Quick Hinge Release O Stucco White ☐ 96 Linen Optional Accessory Cast Iron Waste Pipe Elbow, 90 Degree

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.