

FEATURES



- Solid brass construction for durability and reliability
- Sprayface resists hard water build-up and is easy to clean
- 2.0 gal/min (7.6 l/min) flow rate
- Three spray options available with a simple turn (wide coverage spray, rhythmic pulse spray, and soft aerated spray)
- Complements the Taper collection

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense®

P24840

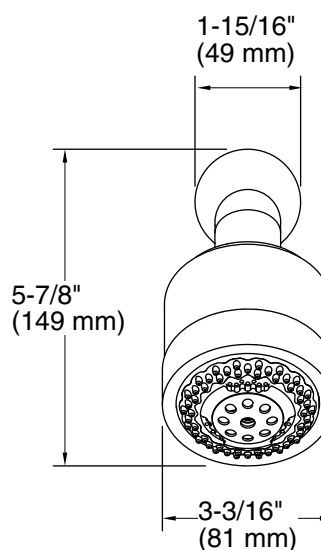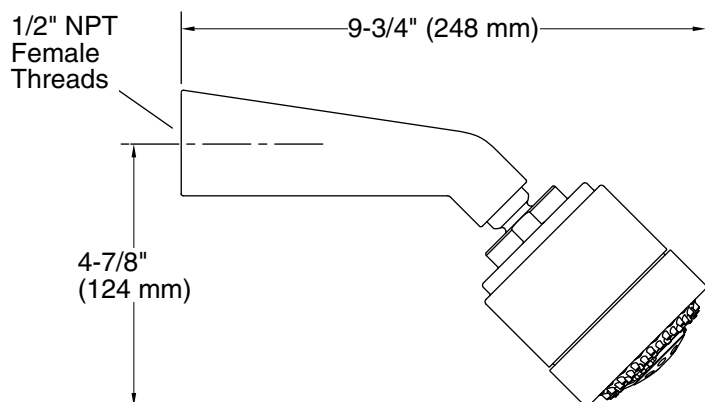

SPECIFIED MODEL				
Model	Description	Finishes		
P24840-00	Taper Multi-Function Showerhead with Arm	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel
				<input type="checkbox"/> GN Gunmetal

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.