

### P24760




#### FEATURES

- Single-function showerhead
- Air-induced spray technology
- 1.75 g/min (6.6 l/min) flow rate
- 1/2" NPT connection
- Arm sold separately
- Complements the Per Se collection

#### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense® (Pending)

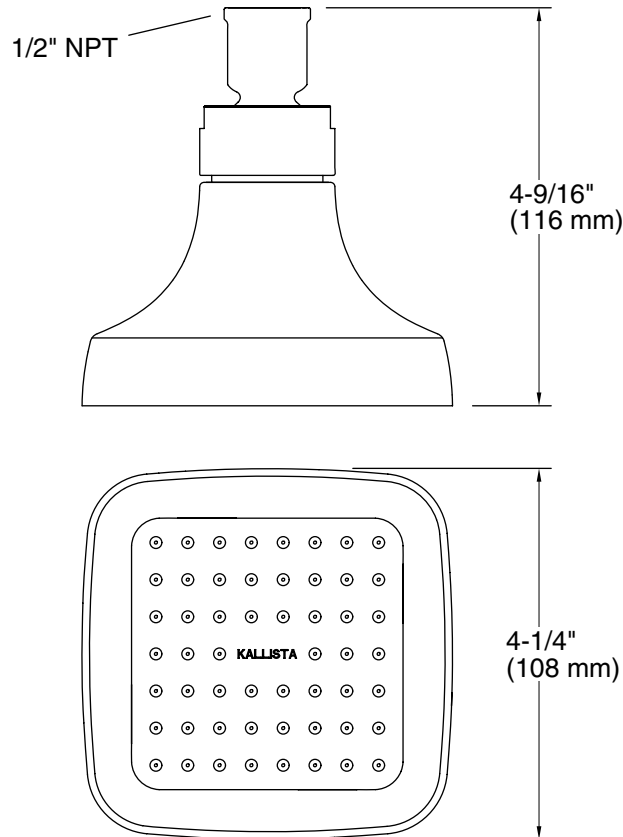

SPECIFIED MODEL				
Model	Description	Finishes		
P24760-00	Per Se Showerhead	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AF French Gold
		<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> W7 Black Nickel	
Required Arm Options				
P24762-00	Per Se Upgraded Shower Arm and Integral Flange	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AF French Gold
		<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> W7 Black Nickel	
P24763-00	Per Se Standard Shower Arm and Flange	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AF French Gold

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.

### FEATURES

- Solid metal construction for durability and reliability
- Pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit
- High-temperature limit stop allows you to preset a comfortable maximum temperature to eliminate scalding
- Complements the Per Se collection

### CODES/STANDARDS APPLICABLE


Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- ADA\* (pending)
- OBC\* (pending)
- CSA B651\* (pending)

**ADA** **CSA B651** **OBC**

\* Compliant when installed to the specific requirement of this regulation

# P24715

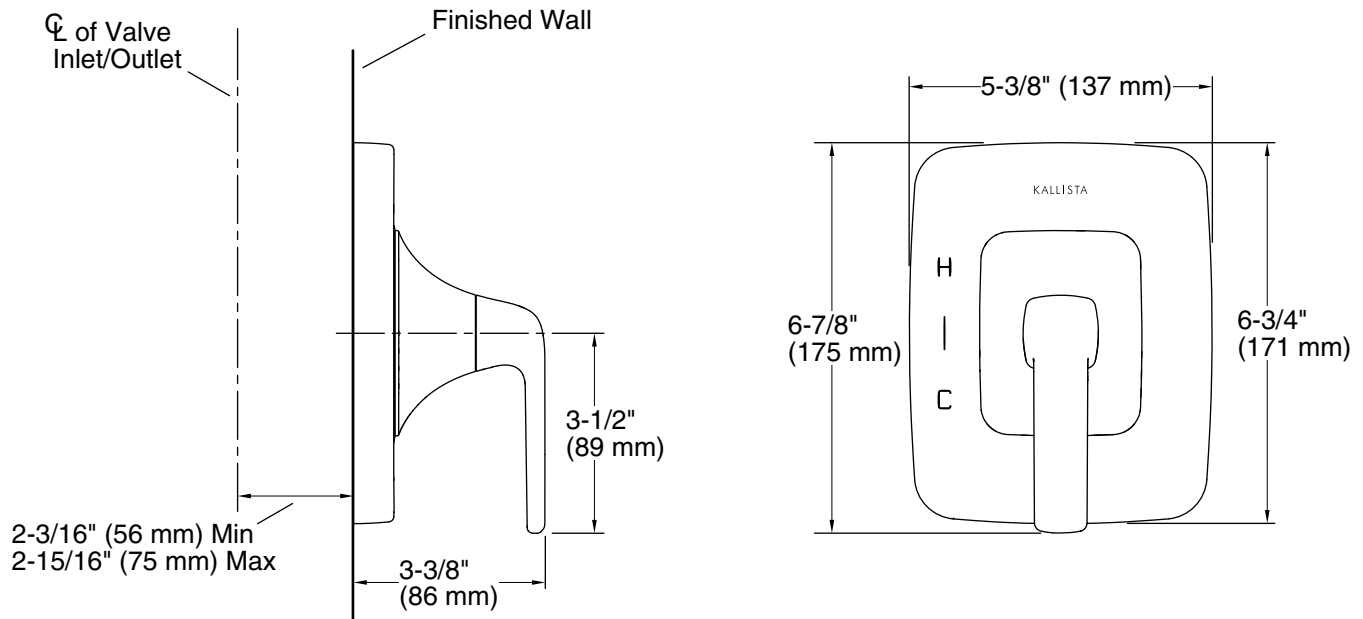

SPECIFIED MODEL						
Model	Description	Finishes				
P24715-LV	Per Se Pressure Balance Valve Trim, Lever Handle	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> 24K Polished Gold
Required Rough-In						
P19310-00	Pressure Balance Valve	<input type="checkbox"/> NA				
P19310-US	Pressure Balance Valve, with stops - PEX inlet (cold expansion)	<input type="checkbox"/> NA				
P19310-WS	Pressure Balance Valve, with stops	<input type="checkbox"/> NA				

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.



### FEATURES

- Solid brass construction for durability and reliability
- 1/2" NPT connection
- Complements the Per Se collection


### CODES/STANDARDS APPLICABLE

- Specified model meets or exceeds the following:
- ASME A112.18.1/CSA B125.1

## P24762, P24763

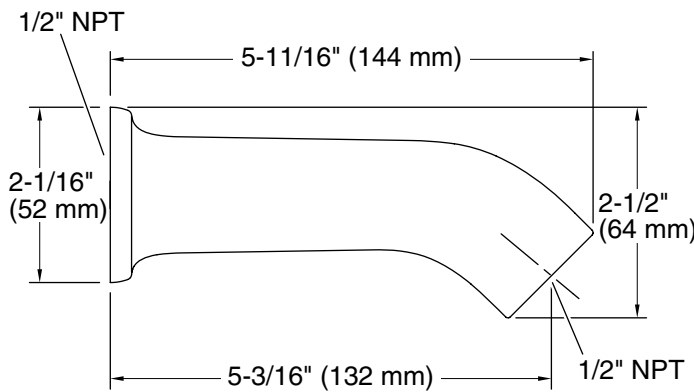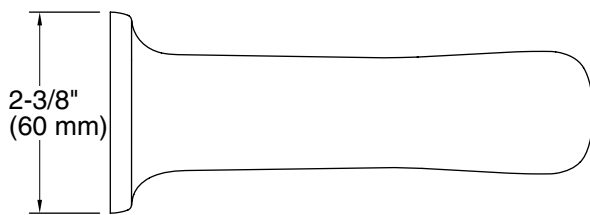

**P24762**

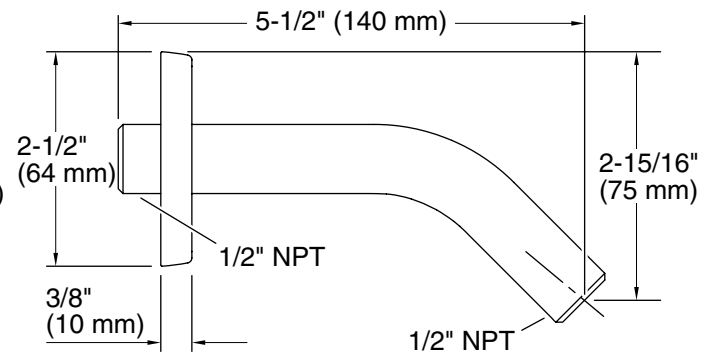

**P24763**

### SPECIFIED MODEL

Model	Description	Finishes				
P24762-00	Per Se Upgraded Shower Arm and Integral Flange	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> 24K Polished Gold
P24763-00	Per Se Standard Shower Arm and Flange	<input type="checkbox"/> CP Polished Chrome				

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.


#### FEATURES

- Brass valve body
- Pressure-balancing diaphragm design valve
- One-piece diaphragm cartridge design for ease of maintenance
- Mixing valve cycles from "cold" to "hot"
- High-temperature limit setting for added safety

#### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1016

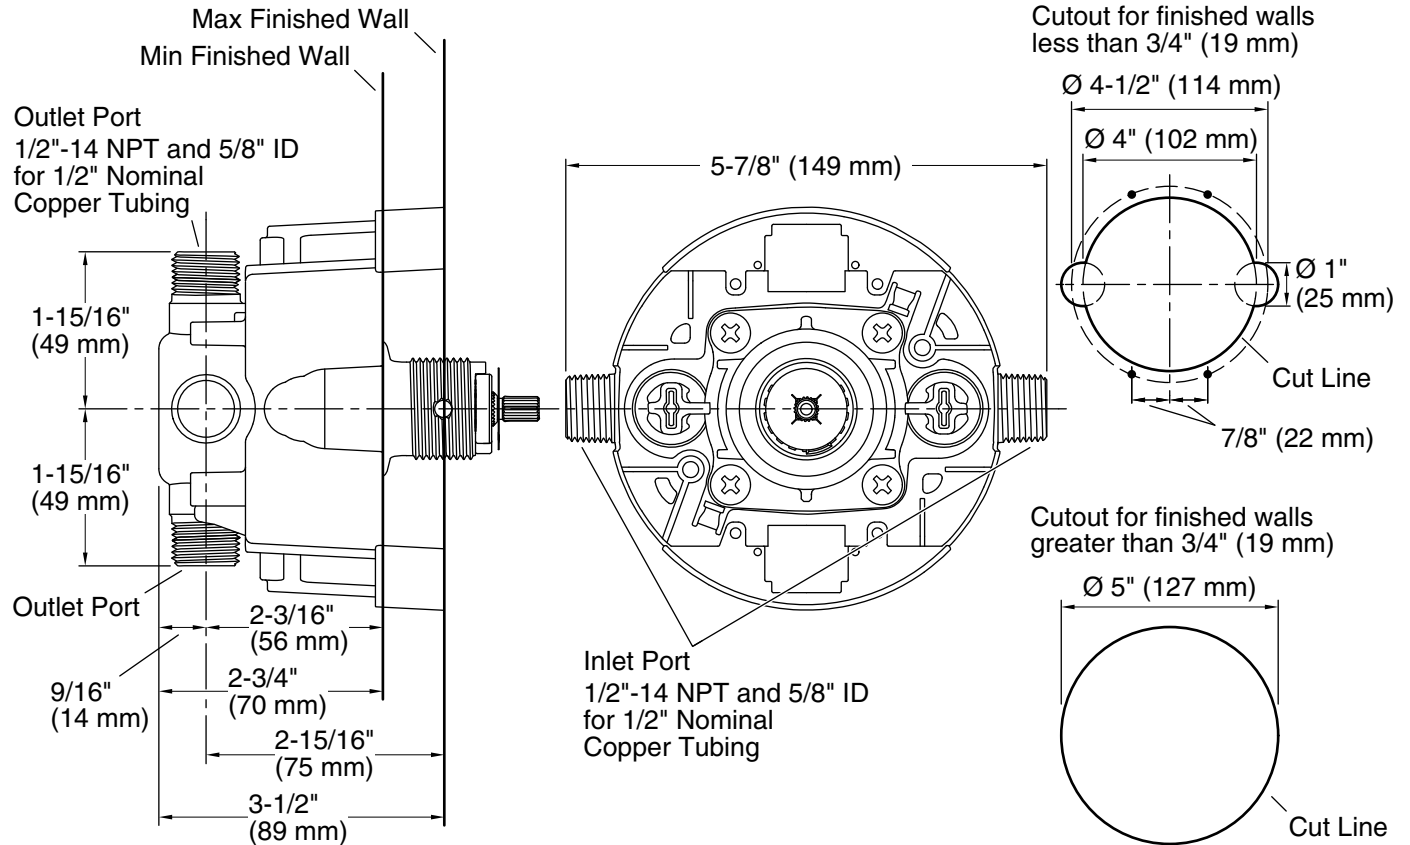

#### INSTALLATION NOTES

All dimensions are nominal.
Install this product according to the installation guide.
Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.
Cap the shower outlet if deck-mount spout, diverter, or handshower is connected to the spout outlet.
Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and wall-mount spout.
For finished walls greater than 3/4" (19 mm) and less than 1-1/2" (38 mm), install support(s) 2" (51 mm) from the stud face.
For finished walls greater than 1-1/2" (38 mm), install support(s) 3" (76 mm) from the face of the finished wall.

#### SPECIFIED MODEL

Model	Description	Finishes
P19310-WS	Pressure-Balancing Valve, with screwdriver stops	<input type="checkbox"/> NA
Optional Accessory		
10350-NA	Universal Rite-Temp® Valve Deep Rough-In	<input type="checkbox"/> NA

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.