


KALLISTA®

Vir Stil® by Laura Kirar Single control single hole bar faucet P80268-00

Features

- High-quality solid-brass construction for durability and reliability
- Spout reach is 5-9/16" (141 mm)
- 1.5 gpm (5.7 lpm) maximum flow rate
- Single-hole installation

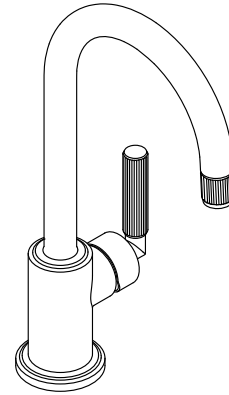

ADA **CSA B651**

Codes/Standards




ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
All applicable US Federal and State
material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
IAPMO Certification

KALLISTA® Five-Year Limited Warranty

See website for detailed warranty
information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Polished Nickel
	VS	Stainless

1-888-4-KALLISTA (1-888-452-5547)


Kallista reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kallista.com.

8-16-2024 12:00 - US/CA

KALLISTA

Vir Stil® by Laura Kirar Single control single hole bar faucet P80268-00

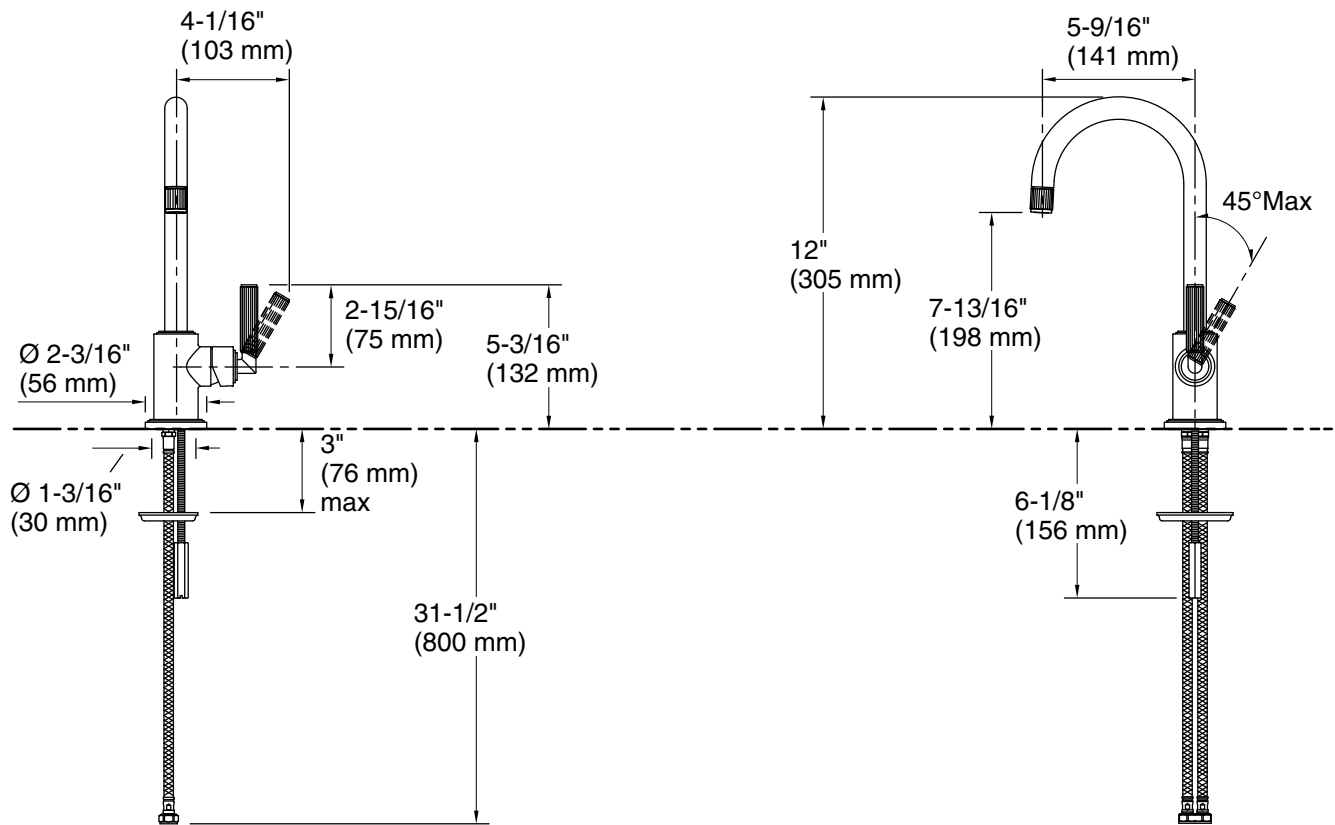

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Drain included: No

Spout:

Spout reach: 5-9/16" (141 mm)

Pressure/fixture Supply Requirements

Fixture pressure max (static): 125 psi (861.8 kPa)

Fixture pressure min (static): 20 psi (137.9 kPa)

Notes

Install this product according to the installation guide.

ADA compliant for faucet handles only
ADA, CSA B651 compliant when installed to the specific requirements of these regulations.