KALLISTA

Barbara Barry Whirlpool and Bath


FEATURES


- Variable speed pump
- Bath mounted electronic control with feedback
- Additional remote control
- In-line water heater
- Cast iron construction

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.7/CSA B45.10
- ASME A112.19.1/CSA B45.2
- CSA C22.2 No 218.2
- ICC/ANSI A117.1
- UL 1795



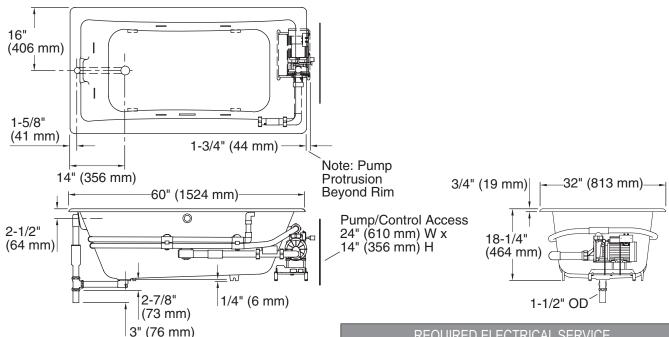

PRODUCT INFORMATION							
Fixture*:	Top Area	Inside Area	Weight				
Bathing Well	40-1/2" (1029 mm) x 20" (508 mm)	54" (1372 mm) x 24" (610 mm)	290 lbs (131.5 kg)				
	Water Depth	Capacity					
To Overflow	13-5/8" (346 mm)	60 gal (227.1 L)					
*Approximate measurements for comparison only.							
Heater	Voltage	Frequency	Amperage				
1.5 kW	240 V	50/60 Hz	11 A				

REQUIRED ELECTRICAL SERVICE

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

220-240 V, 20 A, 50/60 Hz Pump/Control:

ROUGHING-IN NOTES No change in measurements if connected with drain illustrated. 58-1/2" (1486 mm) x 30-1/2" (775 mm)

Floor support under whirlpool must provide for a minimum of 60 lbs/square foot (290 kg/square meter) loading.

Hot water supply must be 70% of capacity or greater.

SPECIFIED MODEL							
Model	Description	Finishes					
P50014-H2	Barbara Barry Whirlpool		☐ 96 Linen				
P50014-BA	Barbara Barry Bath	Bath 🔲 0 Stucco White		☐ 96 Linen			
Required Accessories (Pick One)							
P21573-00	Barbara Barry Waste and Overflow	☐ CP Polished Chrome ☐	☐ AD Nickel Silver		☐ AG Brushed Nickel		
P21575-00	Standard Waste and Overflow	☐ CP Polished Chrome ☐	☐ AD Nickel Silver		☐ AG Brushed Nickel		
Optional Accessories							
P51002-00	Whirlpool Trim Kit, 6-Jet	☐ CP Polished Chrome ☐	⊒ AD Ni	ckel Silver	☐ AG Brushed Nickel		

Drop-in Cutout

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.