


MINI DECK LIGHT



HALF MOON

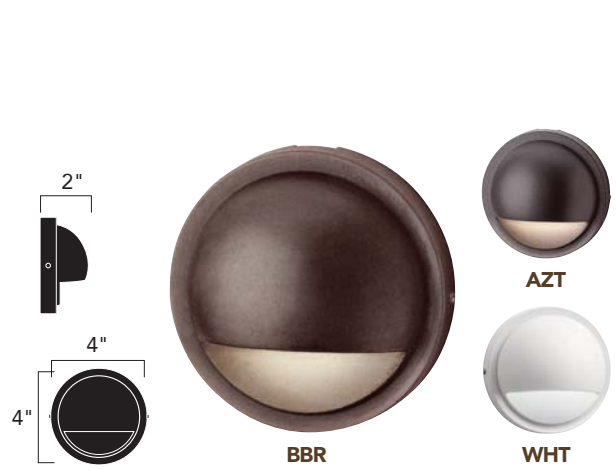

15765 AZT, BBR, BKT, WHT

15764 AZT, BBR, WHT

Kelvin	2700K – Warm White		3000K – Pure White		2700K – Warm White	3000K – Pure White		
	Ordering Guide & Finish	15765 AZT27R 15765 BBR27R 15765 BKT27R 15765 WHT27R	15765 AZT30R 15765 BBR30R 15765 BKT30R 15765 WHT30R	15764 AZT27R 15764 BBR27R 15764 WHT27R		15764 AZT30R 15764 BBR30R 15764 WHT30R		
Housing	Cast Aluminum or Cast Brass			Aluminum or Cast Brass with satin-etched lens				
Light Source	1 Integrated High Output Cree® LEDs, tightly binned for color uniformity, and constant current driver			1 Integrated High Output Cree® LED, tightly binned for color uniformity, and constant current driver				
Color Temp. (CCT) & CRI	2700K (-50/+100) / 80s CRI 3000K (-45/+130) / 80s CRI			2700K (-50/+100) / 80s CRI 3000K (-45/+130) / 80s CRI				
Power Usage at 12V AC Input VA and Watts	.86 W, 1.86 VA			.86 W, 1.86 VA				
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology			9V-15V AC/DC with no loss in output due to constant current technology				
Lumen Maint.	Tested to an L-70 of 40,000 hours			Tested to an L-70 of 40,000 hours				
Delivered Lumens & Efficacy	2700K = 43 Lm 2700K = 51 Lm/W		3000K = 41 Lm 3000K = 50 Lm/W		2700K = 43 Lm 2700K = 51 Lm/W		3000K = 41 Lm 3000K = 50 Lm/W	
Wiring	72" of usable #18-2, SPT-1-W leads. Cable Connectors supplied. WHT has coordinating white leads.			72" of usable #18-2, SPT-1-W leads. Cable Connectors supplied. WHT has coordinating white leads.				
Mounting Access. (Included)	Stainless steel mounting bracket and hardware			Stainless steel mounting bracket and hardware				
Notes	Versatile mini size. Brass will naturally patina over time. *Cree is a registered trademark of Cree, Inc.			Brass will naturally patina over time. *Cree is a registered trademark of Cree, Inc.				
Fixture Photometric (fc)*	Mounting Light	0'	.5'	1'	2'	3'	4'	5'
	6"	76.50	20.00	3.00	0.20	0.06	0.05	0.03
	12"	13.00	10.63	4.80	1.10	0.20	0.08	0.05
	30"	3.20	3.40	2.60	1.20	0.52	0.24	0.12
	Mounting Light	0'	.5'	1'	2'	3'	4'	5'
6"	29.70	14.80	1.60	0.07	0.05	0.01	0.00	
12"	8.30	6.40	2.60	0.45	0.08	0.02	0.01	
30"	2.10	2.05	1.55	0.50	0.30	0.11	0.09	

*Values stated for 3000K. -10% for 2700K.