

CAUTION – RISK OF SHOCK –


Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.

- 1) Remove shipping support bracket.
- 2) Find the appropriate threaded holes on mounting strap. Assemble mounting screws into threaded holes.
- 3) Attach mounting strap to outlet box. Mounting strap can be adjusted to suit position of fixture.
- 4) Grounding instructions: (See Illus. A or B)

A) On fixtures where mounting strap is provided with a hole and two raise dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.

B) On fixtures where a cupped washer is provided. Put ground wire from outlet box under cupped washer and green ground screw and thread screw into hole in mounting strap.


If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector, after following the above steps. Never connect ground wire to black or white power supply wires.

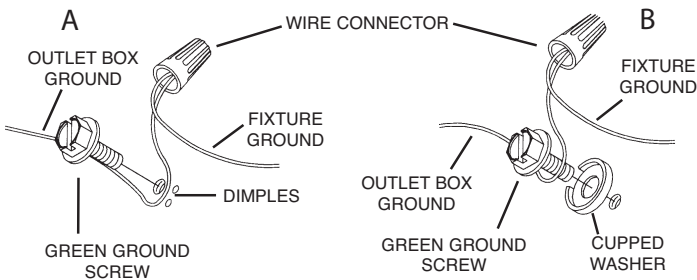

- 5) Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 6) Push fixture to ceiling, carefully passing mounting screws through holes.
- 7) Pass lockwashers on mounting screws and secure fixture to ceiling with threaded lockup knobs.
- 8) Insert threaded nipple into coupling center of fixture below sockets. Secure by holding coupling and tighten hexnut with wrenches.
- 9) Insert recommended bulbs.
- 10) Raise glass into fixture carefully passing hole in glass over long threaded pipe. Pass glass support washer over threaded pipe. Smaller diameter should fit inside glass. Thread and tighten hexnut to secure glass to fixture. (DO NOT over-tighten). Thread finial on threaded pipe and tighten to glass. (DO NOT over-tighten).

