


MINI ACCENT



15384 AZT, AZT 24, BKT, BKT 24, CBR, CO

LONG COWL
MINI-ACCENT

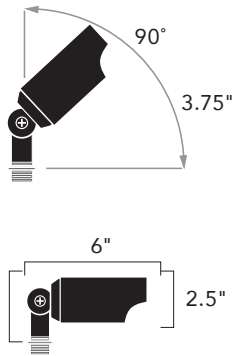

15484 AZT

Ordering Guide & Finish	15384 AZT 15384 AZT 24 15384 BKT 15384 BKT 24 15384 CO 15384 CBR	15484 AZT
Housing	Cast Aluminum, Cast Brass or Unfinished Copper. Heat resistant flat glass lens is fully sealed.	Cast Aluminum. Heat-resistant flat glass lens is fully sealed.
Lamp Base	12V Incandescent bi-pin, high temperature porcelain socket	12V Incandescent bi-pin, high temperature porcelain socket
Supplied Lamp	Lamp not supplied unless noted	Lamp not supplied unless noted
Incandescent Lamp Options	Power usage at 12V AC input VA MAX: 50-W(VA) MR-16 35-W(VA) Max. on 15384CO 20-W(VA) Max. Canada see page 140	Power usage at 12V AC input VA MAX: 50-W(VA) MR-16 20-W(VA) Max. Canada 35-W(VA) MR-11 see page 140
LED Lamp Options	4W (18126-18133) see page 137 Compares to 20W Halogen 5W (18134-18141) see page 137 Compares to 35W Halogen	4W (18126-18133) see page 137 Compares to 20W Halogen 5W (18134-18141) see page 137 Compares to 35W Halogen
Wiring	35" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	35" of usable #18-2, SPT-1-W leads. Cable connectors supplied.
Mounting Access. (Included)	8" slotted in-ground stake	8" slotted in-ground stake
Optional Mounting Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket 15609 – Junction Box Mounting Bracket 15647 – 90° Elbow 15649 – Stem Coupler 15645, 15656, 15657, 15658 or 15570 – Stems	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket 15609 – Junction Box Mounting Bracket 15647 – 90° Elbow 15649 – Stem Coupler 15645, 15656, 15657, 15658 or 15570 – Stems
Optional Lens Accessories	15675 LIN – Linear Lens 15676 FRO – Frosted Lens 15679 BK – Hexcell Louver Shield 15686 BL – Blue Filter	15675 LIN – Linear Lens 15676 FRO – Frosted Lens 15679 BK – Hexcell Louver Shield 15686 BL – Blue Filter
Notes	Copper and brass will naturally patina over time	N/A