


12V LED PATH & SPREAD

GLASS & METAL

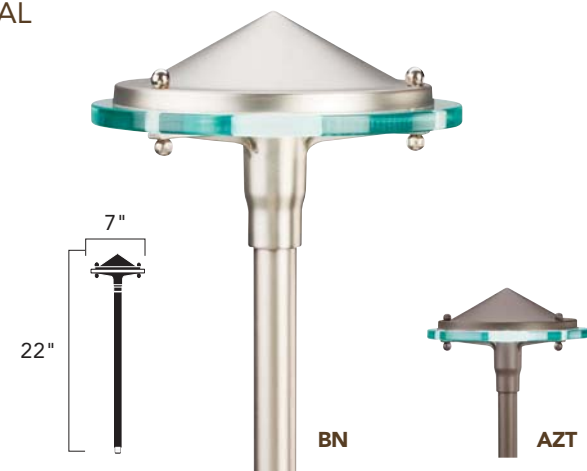

15817 AZT, BN

SIDE MOUNT



15815 AZT, BKT

Kelvin	2700K – Warm White	3000K – Pure White	2700K – Warm White	3000K – Pure White														
Ordering Guide & Finish	15817 AZT27R 15817 BN27R	15817 AZT30R 15817 BN30R	15815 AZT27R 15815 BKT27R	15815 AZT30R 15815 BKT30R														
Housing	Aluminum (AZT) or Brass (BN) with glass diffuser		Cast Aluminum															
Light Source	8 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver		8 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver															
Color Temp. (CCT) & CRI	2700K (-54/+89) / 80s CRI 3000K (-52/+122) / 80s CRI		2700K (-54/+89) / 80s CRI 3000K (-52/+122) / 80s CRI															
Power Usage at 12V AC Input VA and Watts	4.3 W, 5.8 VA		4.3 W, 5.8 VA															
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology		9V-15V AC/DC with no loss in output due to constant current technology															
Lumen Maint.	Tested to an L-70 of 40,000 hours		Tested to an L-70 of 40,000 hours															
Delivered Lumens & Efficacy	2700K = 294 Lm 2700K = 67 Lm/W	3000K = 302 Lm 3000K = 73 Lm/W	2700K = 294 Lm 2700K = 67 Lm/W	3000K = 302 Lm/W 3000K = 73 Lm/W														
Wiring	30" of usable #18-2, SPT-1-W leads. Cable connectors supplied.		52" of usable #18-2, SPT-1-W leads. Cable connectors supplied.															
Mounting Access. (Included)	8" slotted in-ground stake		8" slotted in-ground stake															
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket FM127265 – Hexcell Louver		15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket															
Optional Lens Accessories	N/A		15695 CLR – Sprinkler Shield															
Incandescent	15317 – on page 109		15315 – on page 112															
Notes	N/A		Side mount design for more directional lighting, without glare. Coordinates with matching LED deck light 15765 on page 54.															
Fixture Photometric (fc)*	Distance from Light									Distance from Light								
	0'	1'	2'	3'	4'	5'	6'	7'	8'	0'	1'	2'	3'	4'	5'	6'	7'	8'
Footcandles	36.20	20.00	5.10	1.20	0.30	0.17	0.08	0.05	0.03	92.00	27.00	5.20	1.20	0.30	0.16	0.08	0.05	0.04

*Values stated for 3000K. -10% for 2700K.