



1 LED FIXTURE WITH BRACKET

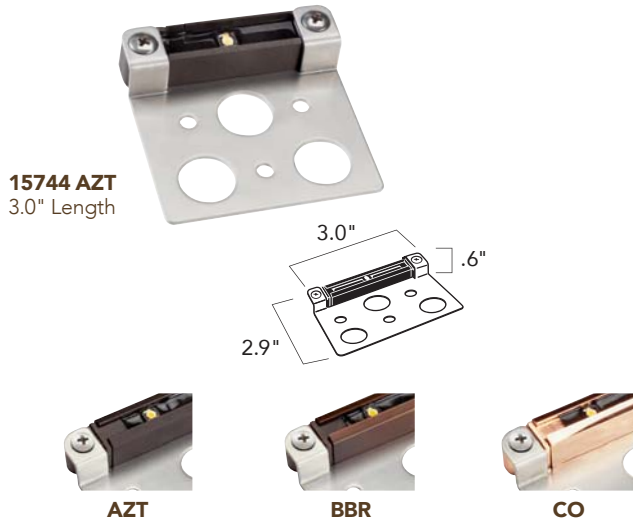

3 LED FIXTURE WITH BRACKET

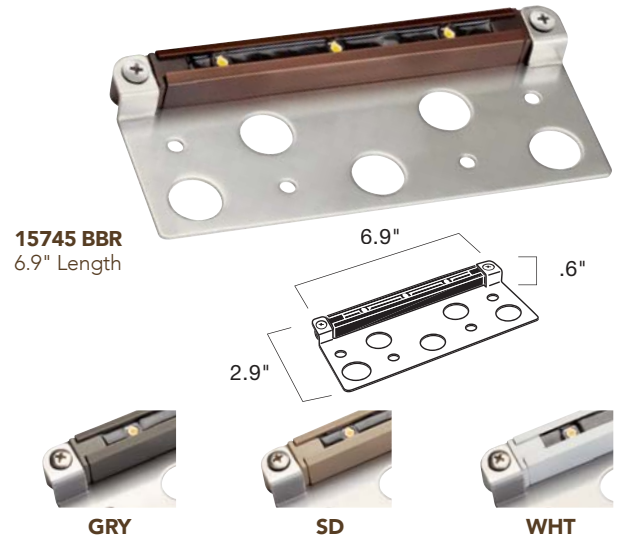

	15744		15745	
Ordering Guide	2700K Warm White	3000K Pure White	2700K Warm White	3000K Pure White
	15744 AZT27, 15744 BBR27, 15744 CO27, 15744 GRY27, 15744 SD27, 15744 WHT27	15744 AZT30, 15744 BBR30, 15744 CO30, 15744 GRY30, 15744 SD30, 15744 WHT30	15745 AZT27, 15745 BBR27, 15745 CO27, 15745 GRY27, 15745 SD27, 15745 WHT27	15745 AZT30, 15745 BBR30, 15745 CO30, 15745 GRY30, 15745 SD30, 15745 WHT30
Housing	Cast Aluminum, Cast Brass, Copper Plated Brass		Cast Aluminum, Cast Brass, Copper Plated Brass	
Light Source	1 Integrated High Output Nichia® LED, tightly binned for color uniformity, and constant current driver		3 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver	
Beam Spread	55°		55°	
Color Temp. (CCT) & CRI	2700K (-280/+0) / 80s CRI 3000K (-200/+175) / 80s CRI		2700K (-280/+0) / 80s CRI 3000K (-200/+175) / 80s CRI	
Power Usage at 12V AC Input VA and Watts	0.19 W, 0.28 VA		.75 W, 1.3 VA	
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology		9V-15V AC/DC with no loss in output due to constant current technology	
Lumen Maint.	Tested to an L-70 of 40,000 hours		Tested to an L-70 of 40,000 hours	
Delivered Lumens & Efficacy	2700K = 8.4 Lm 2700K = 44 Lm/W	3000K = 8.6 Lm 3000K = 45 Lm/W	2700K = 34.7 Lm 2700K = 46 Lm/W	3000K = 44.5 Lm 3000K = 59 Lm/W
Wiring	70" of usable #18-2, SPT-1W leads. Pro series wire connectors.		70" of usable #18-2, SPT-1W leads. Pro series wire connectors.	
Mounting Access. (Included)	Stainless steel masonry bracket and mounting screws		Stainless steel masonry bracket and mounting screws	
Optional	15716 SS – 1 LED Accessory Bracket		15717 SS – 3 LED Accessory Bracket	
Notes	Copper and brass will naturally patina over time		Copper and brass will naturally patina over time	
Fixture Photometric (fc)*	Mounting Height	0' 1' 2' 3' 4'	Mounting Height	0' 1' 2' 3' 4'
	Foot Candles at 12"	8.65 1.10 0.07 0.03 0.02	Foot Candles at 12"	43.7 4.89 0.31 0.12 0.07
	Foot Candles at 24"	2.08 0.98 0.30 0.06 0.04	Foot Candles at 24"	10.7 4.87 1.29 0.12 0.08
	Foot Candles at 36"	0.95 0.61 0.30 0.14 0.06	Foot Candles at 36"	4.96 3.14 1.56 0.67 0.24

*Values stated for 3000K. -10% for 2700K.