


- 1) Assemble mounting screws to backpan using hexnut.
- 2) At the center of the backpan are knockout slots. Remove the set that matches your outlet box.
- 3) Secure the backpan to the outlet box.
- 4) Anchor the backpan to the wall using the set of holes at each end of fixture using wood screws, toggle bolts, plastic anchors, etc.
- 5) **TURN OFF POWER.**

IMPORTANT: Before you start, NEVER attempt any work without shutting off the electricity until the work is done.

- a) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.
- b) Unscrew the fuse(s), or switch "OFF" the circuit breaker switch(s), that control the power to the fixture or room that you are working on.
- c) Place the wall switch in the "OFF" position. If the fixture to be replaced has a switch or pull chain, place those in the "OFF" position.
- 6) Grounding instructions: (See Illus. A or B).
- A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
- B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.


If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector (not provided.) after following the above steps. Never connect ground wire to black or white power supply wires.

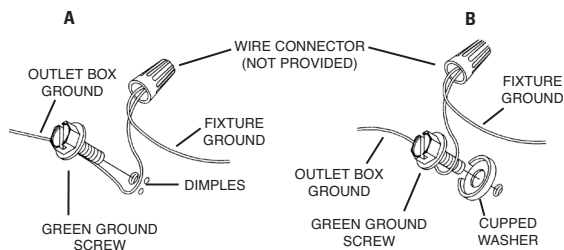

- 7) Make wire connections (connectors not provided). Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 8) Carefully push wire connections back into outlet box making sure all connections remain secure.
- 9) Slip faceplate over mounting screws and backpan. **NOTE:** Be certain wires do not get pinched between backpan and faceplate.
- 10) Secure faceplate to backpan using threaded balls.
- 11) Insert recommended bulb. Carefully push bulb into bulb support clip.
- 12) Lower glass down over socket.

