





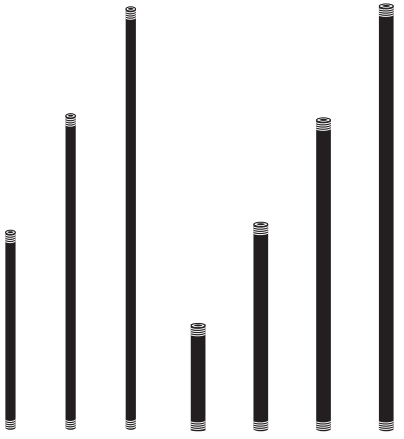


## 12V LED/INCANDESCENT ACCESSORIES

MOUNTING ACCESSORIES	ITEM NUMBER		NOTES
<p><b>Concrete Installation Kit</b></p> 	16501 BBRP		<ul style="list-style-type: none"> <li>• Drive-over and walk-over rated to 4,500 lbs.</li> <li>• Throw-away debris lid</li> <li>• Includes two steel support rods</li> </ul> <p>For use with fixtures 4W, 6.5W &amp; 14W – 16030, 16031, 16032, 16033, 16034, 16035, 16036, 16037, 16038</p>
<p><b>Fixture Mounting Stems</b></p> 	<p>1/4-18 NPSM THD. STEMS  .5" DIA. OVERALL</p> <p>12" 15651 AZT 15651 BKT</p> <p>18" 15652 AZT 15652 BKT</p> <p>24" 15653 AZT 15653 BKT</p> <p>Reference fixture specifications for proper stem</p>	<p>1/2-14 NPSM THD. STEMS  .75" DIA. OVERALL</p> <p>6" 15645 AZT 15645 BBR 15645 BKT</p> <p>12" 15656 AZT 15656 BBR 15656 BKT</p> <p>18" 15657 AZT *15657 BBR 15657 BKT</p> <p>24" 15658 AZT 15658 BBR 15658 BKT</p>	<p>All stems made of corrosion resistant aluminum alloy (except BBR, which is Cast Brass) with baked thermoset powder coating to match fixtures  Used with:</p> <ul style="list-style-type: none"> <li>• In-ground support stakes (low voltage only)</li> <li>• Surface mounting flange (low or line voltage)</li> </ul> <p>1/2-14 NPSM stems will require additional Coupler (15649) or Elbow (15647) for accent light use</p>
<p><b>Adjustable Height Stems</b></p>  <p>Extends from 18" to 33"</p>	15570 AZT 15570 BKT		<p>For use with most 12V accent fixtures</p> <p>Corrosion resistant aluminum alloy with baked thermoset powder coat finish</p> <p>Stem allows fixture height to be extended for plant growth. Used with in-ground support stakes (order separately).</p> <ul style="list-style-type: none"> <li>• 1/2-14 NPSM thds</li> </ul>
<p><b>Bollard Mounting Kit</b></p>  <p>4.0625" ID 4.25" OD</p>	<p>18" 15665 AZT 15665 BKT</p> <p>24" 15666 AZT 15666 BKT</p> <p>36" 15667 AZT 15667 BKT</p>	<p>For use with fixtures 15005, 15011, 15205, 15211</p> <p>Bollard kit is supplied with cast aluminum internal mounting plate including lag bolts for deck or surface mounting. Extruded aluminum bollard finished with baked thermoset powder coat. Order separate bollard template kit for installation into concrete or bollard mounting stake for installation in soil. UL and CSA listed.</p>	
<p><b>Bollard Template Kit</b></p> 	<p>15671 ST For use with fixtures 16130AZT, 16130BKT 16131AZT, 16131BKT 16132AZT, 16132BKT 16133AZT, 16133BKT</p>		<p>For use with all bollard mounting kits</p> <p>For permanent installation into concrete. Template kit includes positioning template, anchor bolts, and mounting hardware.</p>
<p><b>Bollard Mounting Stake</b></p>  <p>23" H</p>	<p>15578 BK For use with fixtures 16130AZT, 16130BKT 16131AZT, 16131BKT 16132AZT, 16132BKT 16133AZT, 16133BKT</p>		<p>For use with all bollard mounting kits on 12V and 120V fixtures.* Improved extruded PVC stake is corrosion resistant and 23" length has increased support and stability. Fitting provided to mount bollard in soil.</p> <p>*As allowed by local electrical codes</p>
<p><b>Polymeric Support Stakes</b></p>  <p>8" H &amp; 14" H</p>	<p>15575 BK 8" In-ground Stake 15576 BK 14" In-ground Stake</p>		<p>For use with 12V fixtures</p> <p>Injection molded stakes are corrosion resistant and provide maximum support and stability</p> <p>U.S. Patent No. D415,018</p>