

KINGSTON

KITCHEN & BATH


INSTALLATION INSTRUCTIONS

Decorative P-Trap

✂ If the flange is not included in this set, you will need to purchase an additional flange (bell, hi box, or flat flange).

Instructions:

1. Remove horizontal leg and slip joint nut from P trap.
2. Apply Teflon tape to all exposed threads.
3. Insert coupling nut (3) and flange (4) onto horizontal leg (6).
4. Insert horizontal leg (6) into wall drain stub-out, do not tighten.
5. Insert coupling nut (1) and black washer (2) onto the drain tail piece (8).
6. Attach P trap (7) to tail piece (8) and hand tighten slip coupling nut (1).
7. Align P trap (7) with horizontal leg (6) and tail piece (8), at this point it may be necessary to cut part of tail piece (8) or part of horizontal leg (6) to obtain proper alignment.
8. After all components have been properly aligned, insert horizontal leg (6) making sure to insert black washer (5) before tightening coupling nut (3).
9. Thread both coupling nuts onto P trap (7) and tighten along with slip joint securing horizontal leg (6) to wall waste opening.
10. Check for leakage by opening faucet and letting water run for at least 45 seconds.

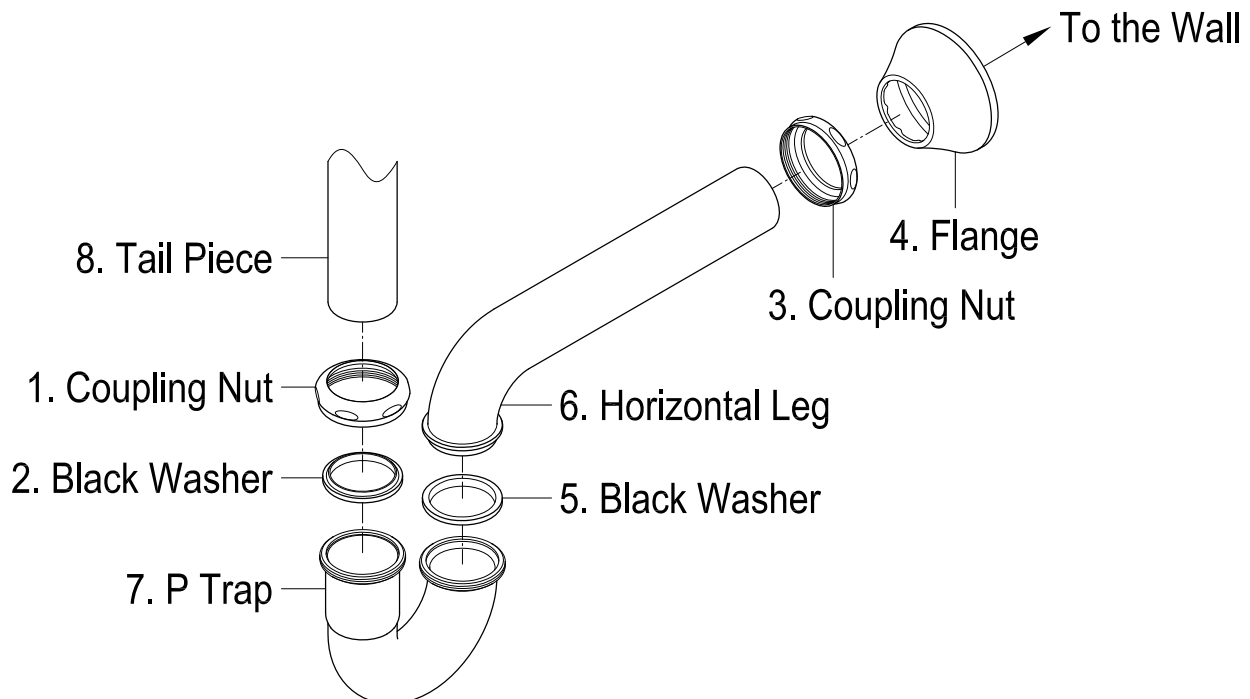

NOTICE

Failure to follow all directions may cause leaks
which may result in water damage

www.kingstonbrass.com
TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710