



Features

- Slotted overflow for maximum bathing depth.
- End drain.
- Bask™ Heated Surface provides soothing warmth on your back and neck.
- VibrAcoustic® technology emits sound waves and offers a surround sound experience.
- Automatic purge cycles remove residual water from air channels after use.
- Integral lumbar support and armrests for comfort.
- Textured bottom surface.
- Two-piece design.
- Six concealed speakers send sound waves through the water to gently massage the body.
- 67-3/4" (1568 mm) x 31-3/4" (806 mm) x 22" (559 mm)

Material

- Acrylic

Hydrotherapy

- Lighted keypad controls.

Technology

- Syncs with devices enabled with BLUETOOTH® wireless technology including smart phones, MP3 players, tablets and laptops located up to 33 feet away.*

Installation

- Freestanding

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Components

Additional included component/s: 25' (7.6 m) cables.



Codes/Standards

CSA B45.5/IAPMO Z124

UL 1795

CSA C22.2 No. 218.2

Greenguard UL 2818 - Gold

KOHLER® One-Year Limited Warranty






See website for detailed warranty information.


*The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar

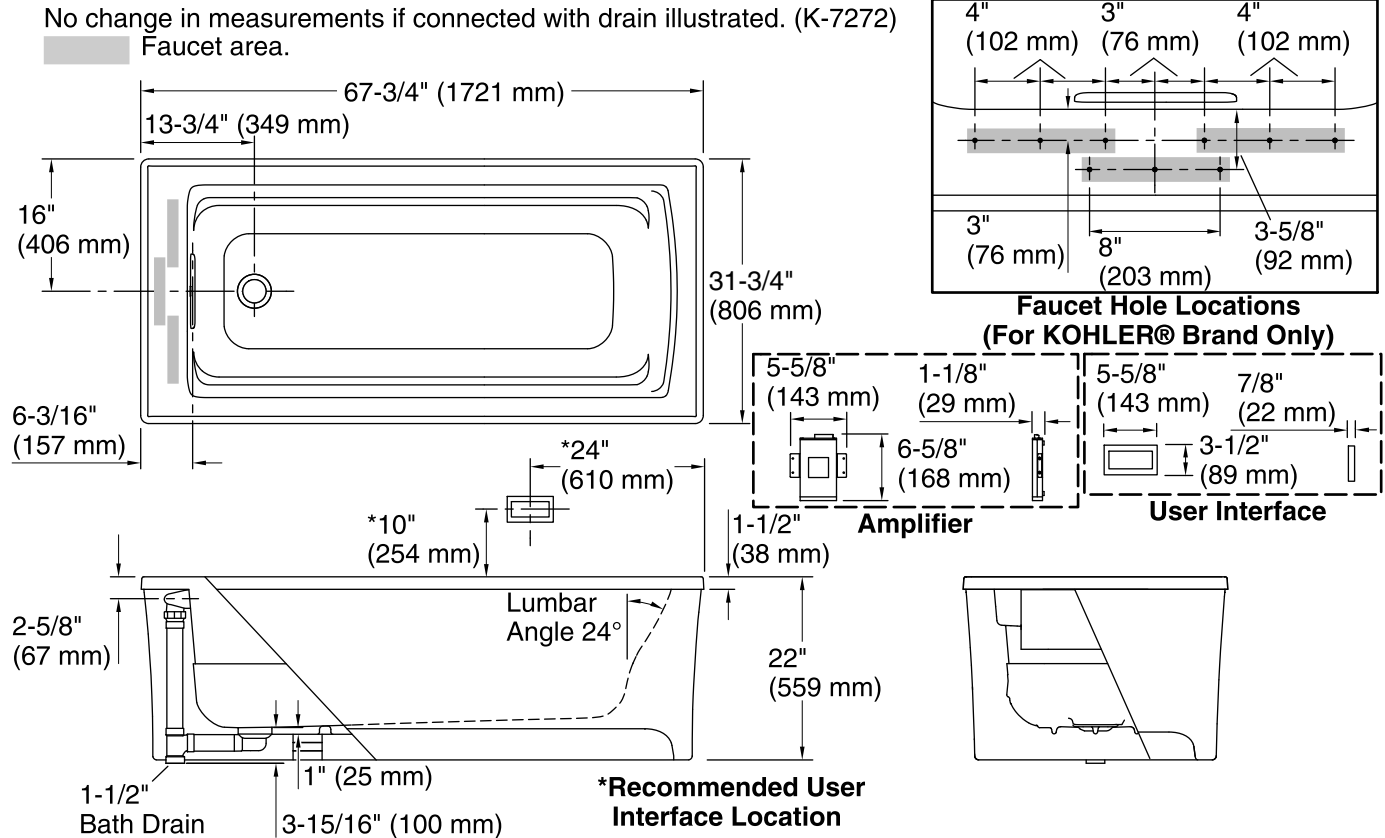

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface, 120 V, 15 A, 60 Hz
Amplifier:

Technical Information

All product dimensions are nominal.

Installation: Freestanding
 Drain location: End
 Basin area, bottom: 51-1/16" x 19-11/16" (1297 mm x 500 mm)
 Basin area, top: 58-9/16" x 25-5/16" (1487 mm x 643 mm)
 Weight: 192 lbs (87.1 kg)
 Minimum floor load: 43.9 lbs/ft² (214.3 kg/m²)
 Water depth: 15-1/16" (383 mm)
 Water capacity: 65 gal (246.1 L)
 Template: Footprint, 1265461, not required, not included
 Electrical component rating: Heated Surface: 120 V, 1.1 A, 60 Hz, 65 W
 Amplifier: 120 V, 1.1 A, 50/60 Hz

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Control amplifier fits 16" (406 mm) center studs.

Provide a separate grounded outlet if connecting to a powered wireless device or adapter.