


Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- Touch control for stream-to-spray water flow
- Promotion™ technology with nylon hose and ball joint for easy operation
- Flexible connections for easy installation
- Three-function sprayhead with spray, aerated stream, and pause settings
- 360° spout rotation
- For single-hole or three-hole installation when included 10-1/2" (267 mm) escutcheon plate is used
- Meets CalGreen requirements for kitchen faucets
- 1.8 gallons (6.8 L) per minute maximum flow rate at 60 psi (4.1 bar)

**PULL-DOWN KITCHEN SINK FAUCET
K-596**

ALSO K-597

ADA **CSA B651** **OBC**

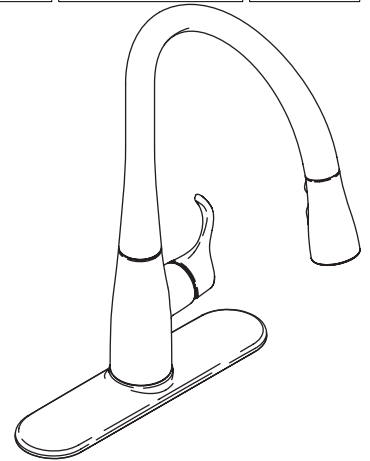

Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations

Colors/Finishes

- CP: Polished Chrome
- VS: Stainless Steel

Specified Model

Model	Description	Colors/Finishes	
K-596	Pull-down kitchen sink faucet – 9" (229 mm) swing spout reach (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> VS
K-597	Pull-down kitchen sink faucet – 8" (203 mm) swing spout reach	<input type="checkbox"/> CP	<input type="checkbox"/> VS

Product Specification

The kitchen sink faucet shall be of metal construction with a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a touch control for stream-to-spray water flow and Promotion technology with nylon hose and ball joint for easy operation. Product shall feature a 360° spout rotation and have flexible connections for easy installation. Product shall be available with a three-function sprayhead with spray, aerated stream, and pause settings. Product shall be for single-hole or three-hole installation when included 10-1/2" (267 mm) escutcheon plate is used. Product shall be 1.8 gallon (6.8 L) per minute maximum flow rate. Product shall meet CalGreen requirements for kitchen faucets. Product shall be Kohler Model K-____-____.


SIMPLICE®

Optional Accessories		
1012715	Deep roughing-in kit – provides an additional 2" (51 mm) assembly depth	<input type="checkbox"/> NA
1167289	Low flow kit – reduces maximum flow to 1.5 gpm (5.7 L) at 60 psi (4.1 bar)	<input type="checkbox"/> NA
1167290	High flow kit – increases maximum flow to 2.2 gpm (8.3 L) at 60 psi (4.1 bar)	<input type="checkbox"/> NA

Installation Notes

Install this product according to the installation guide.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

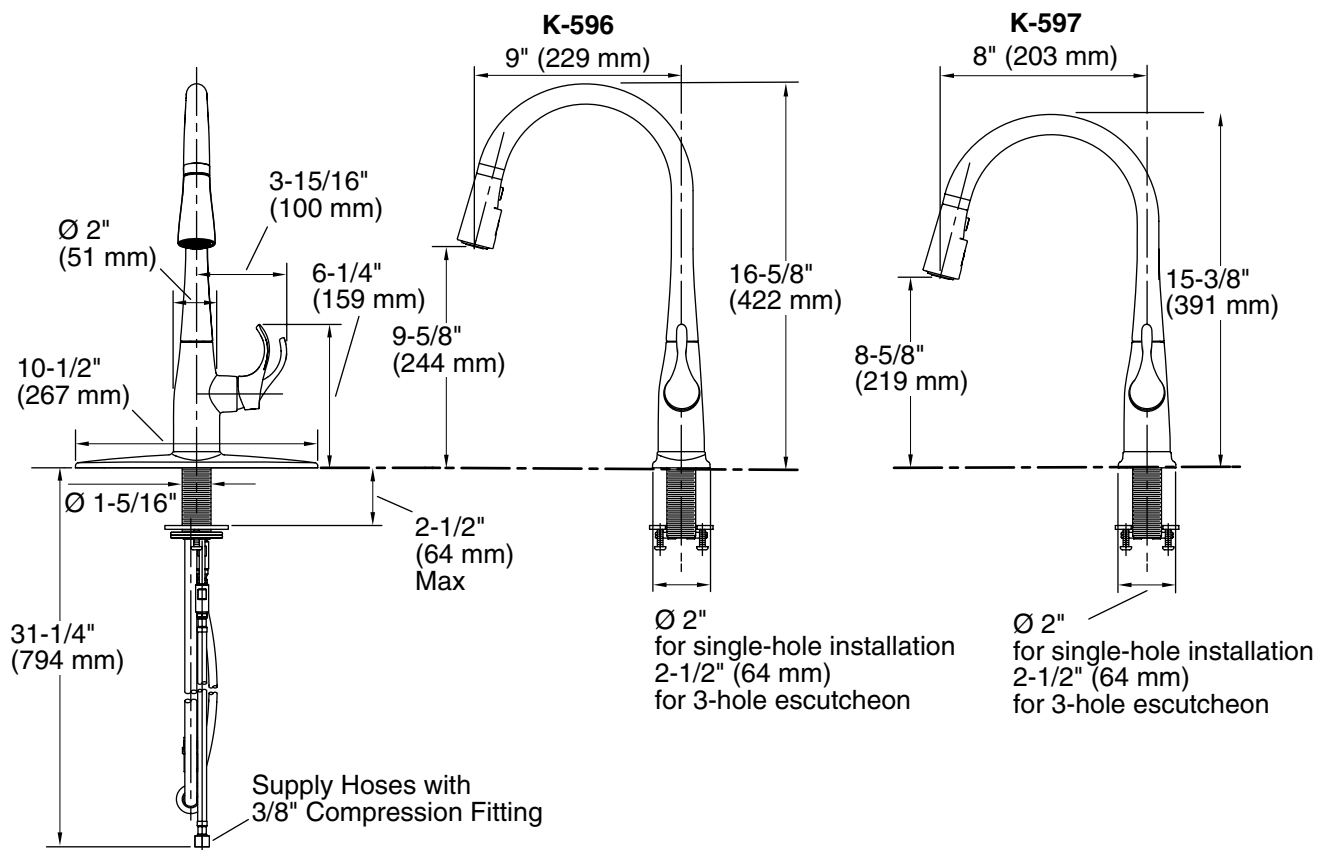

Product Diagram