

### Features

- CleanCoat®+ technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.
- Reversible top track offers a choice of curved or flat profile.

### Material

- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass.

### Technology

- Improved bypassing mechanism for smoother feel.
- Solid-metal contemporary towel bar design.

### Installation

- Out-of-plumb adjustability simplifies installation.
- Sliding shower door.
- Not for use in hospitality.

### Recommended Products/Accessories

K-23723 Faucet cleaner

### Included Components

Additional Components:

Hardware kit



### Codes/Standards

CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color   | Code | Description            |
|---|------|------------------------|
|  | SHP  | Bright Polished Silver |
|  | MX   | Matte Nickel           |
|  | ABZ  | Anodized Dark Bronze   |

### Available Glass Options

| Code | Description   |
|------|---------------|
| L    | Crystal Clear |

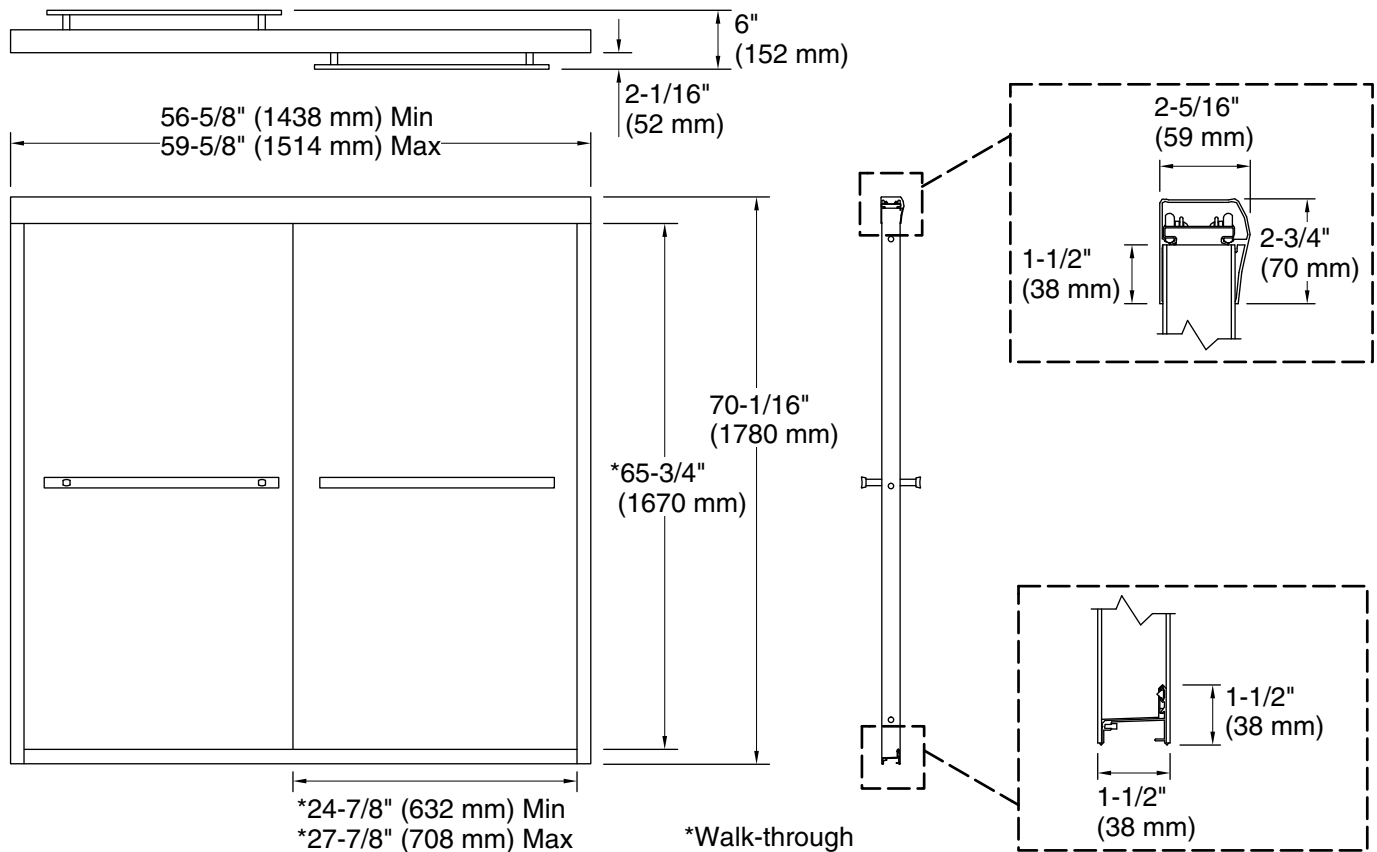

### Technical Information

All product dimensions are nominal.

|                            |                              |
|----------------------------|------------------------------|
| Installation type:         | For shower base installation |
| Opening style:             | Sliding/Bypass               |
| Opening Width - Min:       | 56-5/8" (1438 mm)            |
| Opening Width - Max:       | 59-5/8" (1514 mm)            |
| Walk-through - Min:        | 24-7/8" (632 mm)             |
| Walk-through - Max:        | 27-7/8" (708 mm)             |
| Base-To-Wall Radius - Max: | 5/8" (16 mm)                 |
| Glass thickness:           | 1/4" (6 mm)                  |
| Glass coating:             | CleanCoat®                   |

### Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 71-13/16" (1824 mm) to allow for installation clearance.