

Features

- Advanced spray engine with easy-grip sprayface provides three alternate experiences: wide coverage, medium coverage, and concentrated spray.
- Ergonomic sprayhead pivots to allow precise adjustment for a targeted hydromassage.
- MasterClean™ sprayface is easy to clean.
- 1.75 gpm (gallons per minute) showerhead flow rate.
- Coordinates with Purist faucets and accessories.

Material

- KOHLER finishes resist corrosion and tarnishing.

Installation

- Wall-mount

Installed component/s: K-9514 MasterShower® 60-inch metal shower hose, Handshower, Slidebar and Trim, Supply Elbow, and Vacuum Breaker.



ADA

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
----	-----------------

BN	Vibrant® Brushed Nickel
----	-------------------------

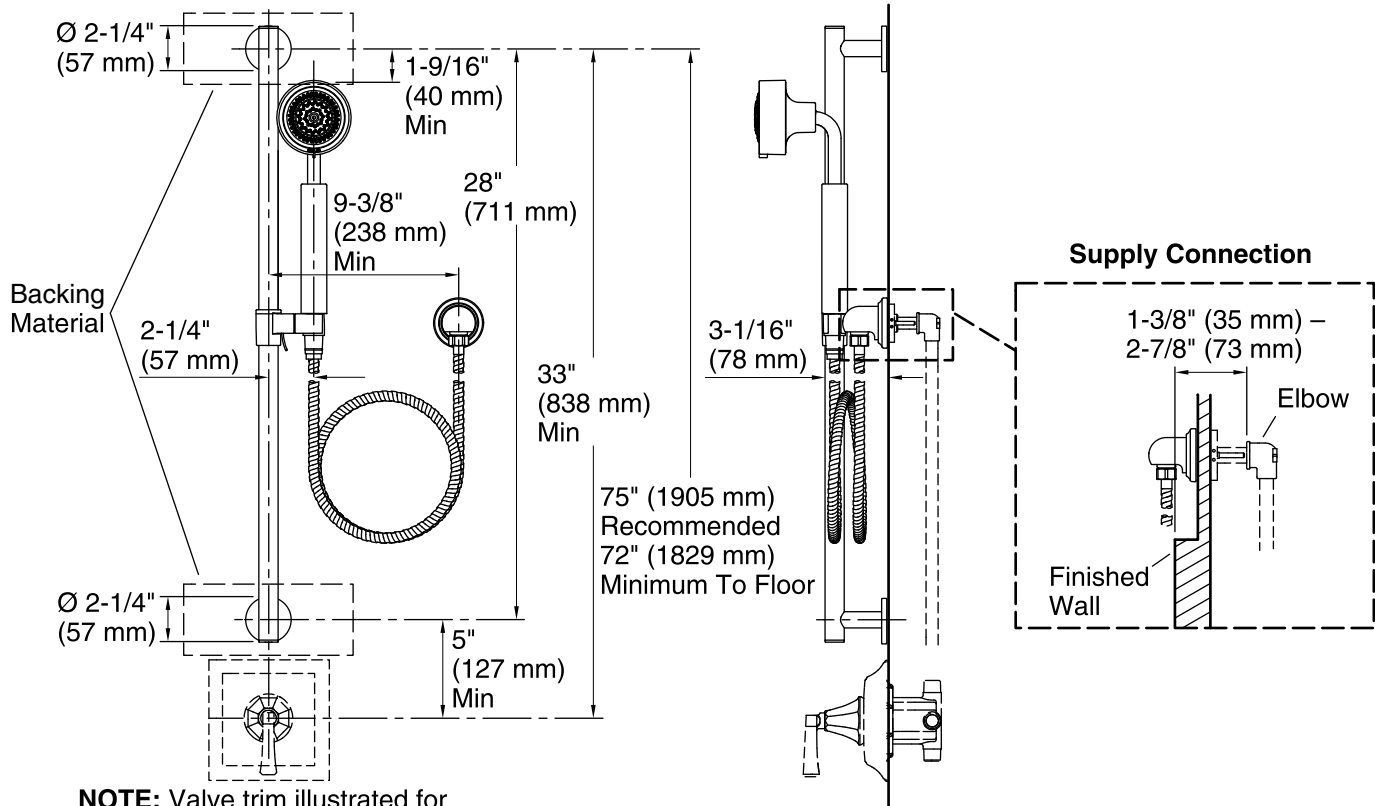

NOTE: Valve trim illustrated for dimensioning only, not included in the product.

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min)

Showerhead:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Notes

Install this product according to the installation guide.

IMPORTANT! The sidebar must be mounted to stud framing at both the top and bottom mounting locations. Do not use or depend on plastic wall anchors to attach the sidebar.

Plumbing codes may require that an atmospheric vacuum breaker be installed in-line to handshowers. Consult with local codes.

ADA, OBC compliant when installed to the specific requirements of these regulations.