

Features

- Includes an 8" square metal rainhead, K-45203 Shift Multi-Function Handshower, arch shower column, and K-9514 MasterShower® 60-inch metal hose.
- 2.0 gpm (gallons per minute) flow rate.
- Slidebar bracket allows you to adjust the height and angle of the handshower.
- Diverter at the base of the column makes for easy toggling between handshower and showerhead.
- Check valves installed in handshower, showerhose and diverter valve for backflow prevention.


Material

- KOHLER finishes resist corrosion and tarnishing.

Installation

- For use in Bath & Shower installations.
- Installs in less than 60 minutes without changes to in-wall plumbing (subject to condition of existing installation).

Loose component/s: handshower, rainhead, and shower hose.

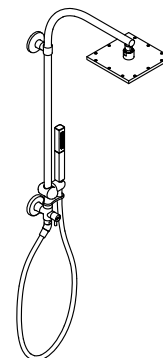

ADA

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

	CP	Polished Chrome
--	----	-----------------

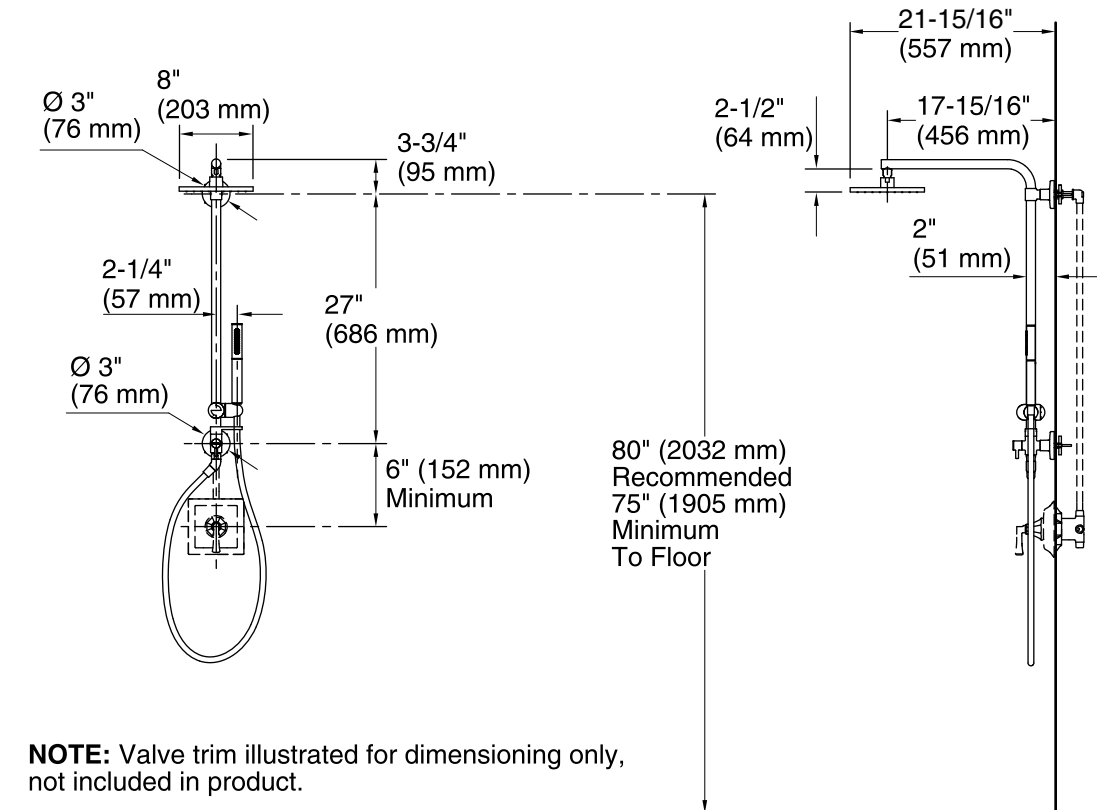

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation guide.

For retrofit/remodel installations: Check the existing shower enclosure for adequate clearances before proceeding with the shower column installation. Refer to the rough-in for the shower column and the Rain showerhead.

Verify the distance between the ceiling and the center of the existing shower arm at the finished wall surface.

Verify the distance between the shower floor and the center of the existing shower arm at the finished wall surface. Ensure sufficient clearance under the Rain showerhead.

Verify the distance between the center of the existing shower arm and the center of the mixing valve trim.

ADA compliant when installed to the specific requirements of these regulations.