



Aerie®

60"x36" Sliding w/ Return
K-706134-L

Features

- Frameless, 5/16-inch-thick (8mm) Crystal Clear tempered glass.
- Includes a 36-inch-wide glass return panel to create a corner enclosure.
- 6-3/4-inch vertical handle on both sides of the glass.
- Premium, quick-release double rollers on top and bottom for quality feel and operation.
- Low threshold (1-3/4-inch) for easy entry and exit.
- Seals provide excellent water containment.
- Full-length magnetic strip keeps door firmly closed.
- CleanCoat® glass treatment repels water for improved ease of cleaning.
- No exposed screws for a sleek, contemporary look.
- Available in Bright Polished Silver (SHP) finish.

Installation

- Sliding shower door.
- For 60- x 36-inch corner installation.
- Door is reversible for right- or left-hand installation.
- Twist & Lock wall jamb system locks into place with no cutting required.
- 1-3/16-inch width adjustability on each wall jamb, offering 2-3/8-inch total adjustability.
- Additionally, filler section (K-1296810-SHP, sold separately) can be used to extend the width of a door or return panel by up to 3/4-inch.
- Adjustable double rollers allow for out-of-plumb fine-tuning.

Recommended Accessories

1296810 Aerie™ Door Filler Jamb

Components

Product includes:

K-706147-L 60" Sliding Door

K-706152-L 36" Return Panel

Additional included component/s: Hardware Kit.



Codes/Standards

ANSI Z97.1

CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------




SHP	Bright Polished Silver
-----	------------------------


Available Glass Options

Code	Description
------	-------------

L	Crystal Clear
---	---------------

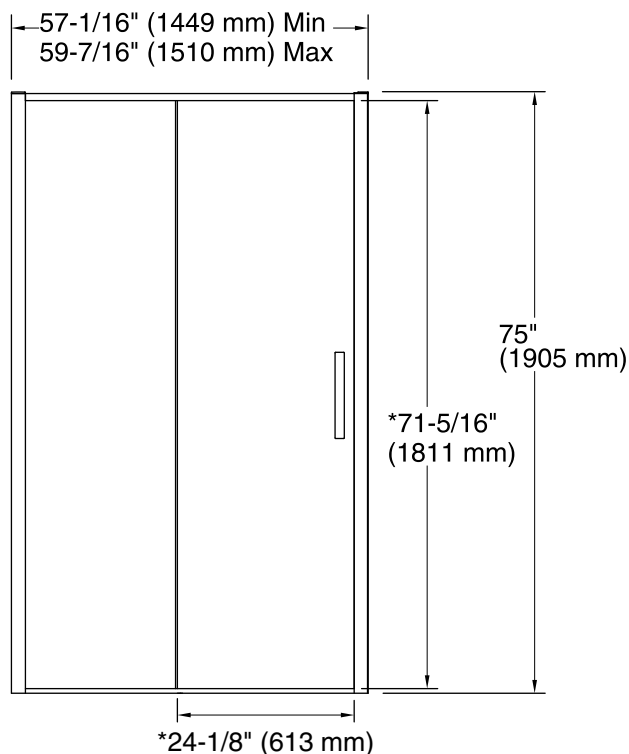

***Walk-through**

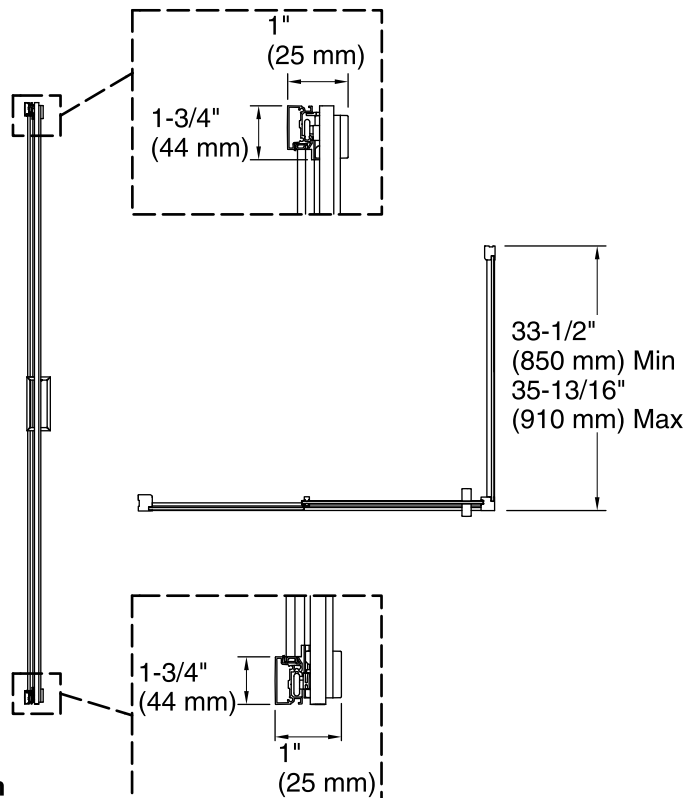

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 57-1/16" (1450 mm)

Opening Width - Max: 59-7/16" (1510 mm)

Walk-through - Min: 24-1/8" (613 mm)

Walk-through - Max: 24-1/8" (613 mm)

Glass thickness: 5/16" (8 mm)

Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 78" (1981 mm) to allow for installation clearance.