

### Features

- Metal construction.
- Adjustable handshower sprayface rotates to select wide-coverage or forceful utility spray options.
- MasterClean<sup>™</sup> sprayface resists hard water buildup and easy to clean.
- Durable KOHLER finishes resist corrosion and tarnishing.
- Complete range of faucets, accessories and showering components to coordinate a full bathroom.

### **Required Accessories**

K-97339 Multiproduct Mounting-block





### **Codes/Standards**

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense<sup>®</sup> California Energy Commission (CEC)

## KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

Color tiles intended for reference only.

Color Code Description



- CP Polished Chrome
- TT Vibrant Titanium



# **KOHLER**, Faucets

### Composed™

(200 mm) Min

Finished Wall

30-5/16"

31-1/8"

Min

Max

Min

(770 mm)

(791 mm)

2" (51 mm)

⊤1-15/16" + (49 mm)

Freestanding Bath Filler K-T73087-4

7-7/8"


8-1/4"

3-3/8"

Min

(86 mm)

(210 mm)

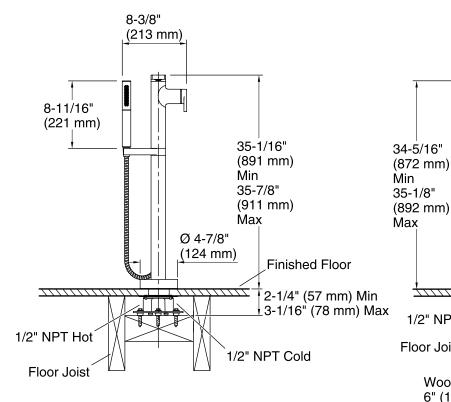

### **Technical Information**

All product dimensions are nominal.

### Spout:

Spout reach: 8-1/4" (210 mm) Handle clearance: 1-15/16" (50 mm)

### Faucet:

7.5 gal/min (28.4 l/min) Flow rate: Pressure: 45 psi (3.1 bar)

### Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min) Pressure: 80 psi (5.5 bar)

### Notes

Wood Support 6" (152 mm) Min Width

1/2" NPT

Floor Joist

Install this product according to the installation quide.

ŀΡΓ.

1-1

Adequate floor space is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application.

Concrete can be used as the floor support. Requires a 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, which are not included.

